


TE0728 TRM

The Trenc Electronic TE0728 is a SoC module integrating a Xilinx Automotive Zynq-7020, 512 MByte DDR3 SDRAM with 16-Bit width, 16 MByte Flash Memory for configuration and operation, two 100 Megabit Ethernet transceivers, and powerful switch-mode power supplies for all on-board voltages. A large number of configurable I/O's is provided via rugged high-speed stacking strips.

All this in a compact 6 x 6 cm form factor, at the most competitive price.

All parts are at least automotive temperature range up to +105°C. The module operating temperature range depends on customer design and cooling solution. Please contact us for options.

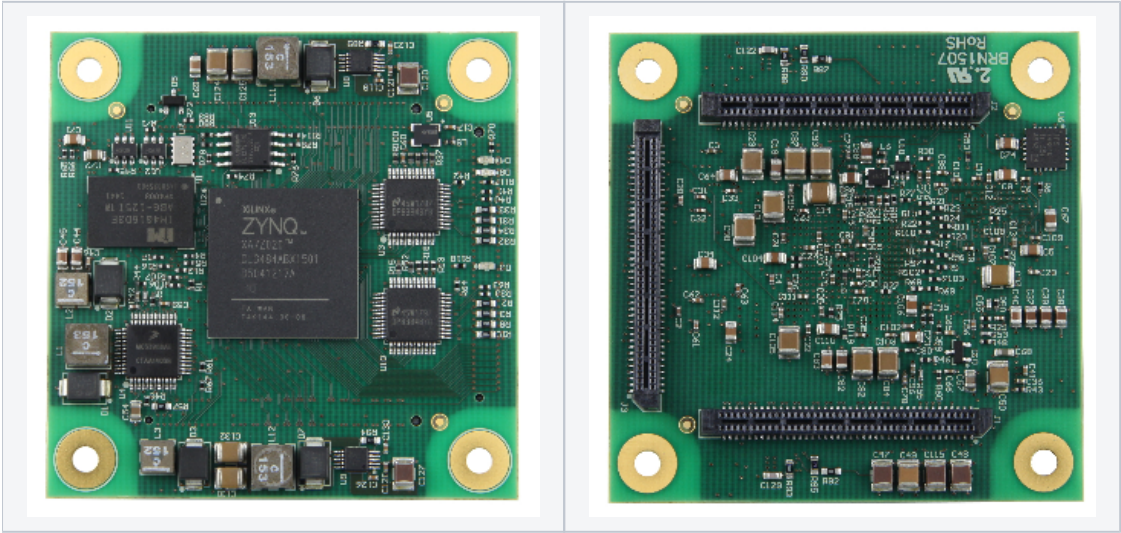

PS Peripherals (on-board)

Chip/Interface	IC	PS7 Peripheral	
SPI Flash	S25FL127SABMFV10	QSPI0	16 MByte Flash
I2C EEPROM	24xx64	I2C0	8 KByte EEPROM
RTC I2C	RV-3029	I2C0	
RTC Interrupt	RV-3029	GPIO - MIO0	
User LED		GPIO - MIO7	

Mapping table for on-board IC to PS7 Peripherals

MIO Pin	Mapped to	Pull up/down	Notes
0	GPIO	Up	RTC Interrupt
1	QSPI0		
2	QSPI0	Down	
3	QSPI0	Down	
4	QSPI0	Down	Override to up on base for bootmode change
5	QSPI0	Up	

6	QSPI0	Down	
7	GPIO	Down	On-board LED
8	CAN1 TXD	Down	CAN transceiver
9	CAN1 RXD		CAN transceiver
10	SPI1 MOSI		
11	SPI1 MISO		
12	SPI1 SCLK		
13	SPI1 SS0		
14	I2C0 SCL	Up	On-board RTC, and EEPROM
15	I2C0 SDA	Up	On-board RTC, and EEPROM

Recommended Peripheral mapping for MIO Voltage bank 0.

PS7 UART

There is no fixed mapping for PS7 UART, if needed it can be mapped to free pins from MIO1 Bank or via EMIO to PL pins.

Recommended mapping for primary (console, debug) UART are MIO52, MIO53 for all cases when MIO1 is not used for off-board Gigabit ETH PHY.

PL Peripherals

Both Ethernet PHY IC's are connected to PL pins in Bank 34, all PHY IC pins are connected to FPGA pins, there is no sharing of signals for the two PHY's.

PUDC pin is connected with pull-up to 3.3V those pre-configuration pull-ups are disabled by default. Strapping resistor exist to change the PUDC mode.

PS and PL Banks

Bank	VCCIO	B2B I/O Pins	Notes
500	3.3V	0	
501	USER J2.4 B2B	36	MIO1 VREF is connected to resistor divider to support HSTL18
13	USER J1.39 B2B	48	Differential routing
33	3.3V	33	Single ended routing
34	3.3V	0	Ethernet PHY's
35	3.3V	42	Single ended routing
0	3.3V	4	JTAG, note 3 pins can be used as input only from PL Fabric

Clock sources

IC	Description	Frequency	Used as
U14	MEMS Oscillator	33.3333 MHz	PS7 PLL clock
U5	MEMS Oscillator	25 MHz	Ethernet PHY Clock

U7	RTC (internal oscillator)	32.768 KHz	Used by RTC, CLKOUT of RTC not connected
----	---------------------------	------------	--

LED's

Designator	Color	Connected to	Active Level	IO Standard
D9	Green	DONE	Low	not applicable
D8	RED	MIO7	High	not applicable
D4	Green	PL pin V18	High	LVCMOS33

XADC Usage

XADC Pin	Connected to	Notes
AD0	B2B	
AD1	B2B	
AD3	B2B	
AD4	B2B	
AD5	B2B	
AD7P	B2B	
AD7N	GND	
AD8	B2B	
AD9	B2B	
AD10	B2B	
AD12	B2B	
AD13	B2B	
AD14	B2B	
AD15	B2B	

XADC is used with internal reference option.

Note the XADC capable pins are not routed differentially to the B2B connector. The performance and usability of the XADC must be evaluated.

Ethernet

There are two 100 MBit Extreme Temperature Ethernet PHY's DP83848YB on the board. Datasheet is available from TI, Literature number SNLS208H. Both PHY's are connected with all I/O Pins to FPGA Bank 34 (VCCIO = 3.3V). PHY Clock 25 MHz source is provided from MEMS Oscillator. All LED outputs have on-board pull-ups. Outputs to Magnetics have also required termination resistors on board.

Both PHY's must be operated in MII Mode, other modes are not supported. It is possible to use PS ENET0 or ENET1 via EMIO routing or Ethernet IP Cores implemented in PL Fabric.

	ETH1	ETH2	Pullup	Notes
CTREF	J3.57	J3.25		Magnetics center tap voltage
TD+	J3.58	J3.28	on-board	
TD-	J3.56	J3.26	on-board	
RD+	J3.52	J3.22	on-board	
RD-	J3.50	J3.20	on-board	
LED1	J3.55	J3.23	on-board	
LED2	J3.53	J3.21	on-board	
LED3	J3.51	J3.19	on-board	
POWERDOWN/INT	L21	R20	on-chip	It is recommended to configure FPGA I/O as input with Pullup or as output driving 1 if Interrupt not used.
RESET_N	M15	R16	on-chip	It is recommended to configure FPGA I/O as input with Pullup or as output (active low PHY Reset).

It is recommended to add IOB TRUE constraint for the MII Interface pins.

When connecting the PHY's to Zynq PS ETH0, ETH1 EMIO GMII Interfaces it is recommended to use [GMII to MII Wrap IP Core](#). This IP core maps the EMIO GMII to external MII Interface.

Legal Notices

Data Privacy

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

Document Warranty

The material contained in this document is provided "as is" and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used /modified / copied only in accordance with the terms of such license.

Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

REACH, RoHS and WEEE

REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of [REACH](#). The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no [SVHC \(Substances of Very High Concern\) on the Candidate List](#) are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the [European Chemicals Agency \(ECHA\)](#).

RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

WEEE

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

Error rendering macro 'page-info'

Ambiguous method overloading for method `jdk.proxy279.$Proxy4022#hasContentLevelPermission`. Cannot resolve which method to invoke for `[null, class java.lang.String, class com.atlassian.confluence.pages.Page]` due to overlapping prototypes between: `[interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]` `[interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]`

Document Change History

Date	Revision	Authors	Description
------	----------	---------	-------------

2015-05-10	 Unknown macro: 'metadata'		Work in progress
	All	 Unknown macro: 'metadata'	