

# TE0784 TRM

[Download PDF version of this document.](#)

## Table of Contents

- [Overview](#)
  - [Key Features](#)
  - [Block Diagram](#)
  - [Main Components](#)
  - [Initial Delivery State](#)
- [Boot Process](#)
- [Signals, Interfaces and Pins](#)
  - [Board to Board \(B2B\) I/Os](#)
  - [MGT Lanes](#)
  - [JTAG Interface](#)
  - [System Controller CPLD I/O Pins](#)
  - [Default PS MIO Mapping](#)
  - [Gigabit Ethernet](#)
  - [I2C Interface](#)
  - [Pin Definitions](#)
- [On-board Peripherals](#)
  - [System Controller CPLD](#)
  - [eMMC Flash Memory](#)
  - [DDR3L Memory](#)
  - [Quad SPI Flash Memory](#)
  - [Gigabit Ethernet PHYs](#)
  - [MAC Address EEPROMs](#)
  - [Configuration EEPROM](#)
  - [Programmable Clock Generator](#)
  - [Oscillators](#)
  - [On-board LEDs](#)
- [Power and Power-on Sequence](#)
  - [Power Supply](#)
  - [Power Consumption](#)
  - [Power Distribution Dependencies](#)
  - [Power-On Sequence](#)
  - [Voltage Monitor Circuit](#)
  - [Power Rails](#)
  - [Bank Voltages](#)
- [Board to Board Connectors](#)
  - [Connector Mating height](#)
  - [Connector Speed Ratings](#)
  - [Current Rating](#)
  - [Connector Mechanical Ratings](#)
- [Variants Currently In Production](#)
- [Technical Specifications](#)
  - [Absolute Maximum Ratings](#)
  - [Recommended Operating Conditions](#)
  - [Physical Dimensions](#)
- [Revision History](#)
  - [Hardware Revision History](#)
  - [Document Change History](#)
- [Disclaimer](#)
  - [Data Privacy](#)
  - [Document Warranty](#)
  - [Limitation of Liability](#)
  - [Copyright Notice](#)
  - [Technology Licenses](#)
  - [Environmental Protection](#)
  - [REACH, RoHS and WEEE](#)

## Overview

The Trenc Electronic TE0784 is a high-performance, industrial-grade SoM (System on Module) with industrial temperature range based on Xilinx Zynq-7000 SoC XC7Z045-2FFG900I.

These highly integrated modules with an economical price-performance-ratio have a form-factor of 8,5 x 8,5 cm and are rugged for industrial applications.

All parts cover at least industrial temperature range of -40°C to +85°C. The module operating temperature range depends on customer design and cooling solution. Please contact us for options and for modified PCB-equipping due increasing cost-performance-ratio and prices for large-scale order.

## Key Features


- Xilinx Zynq-7000 XC7Z035, XC7Z045 or XC7Z100 SoC
- Rugged for shock and high vibration
- Large number of configurable I/Os are provided via rugged high-speed stacking strips
- Dual ARM Cortex-A9 MPCore
  - 1 GByte RAM (32bit wide DDR3)
  - 32 MByte QSPI Flash memory
  - 2 x Gigabit (10/100/1000 Mbps) Ethernet transceiver PHY
  - 4 GByte eMMC (optional up to 64 GByte)
- 2 x MAC-address EEPROMs
- Optional 2x 64 MByte HyperFLASH or 2x 8 MByte HyperRAM (max 2x 32 MByte HyperRAM)
- Temperature compensated RTC (real-time clock)
- Si5338A programmable quad PLL clock generator for GTX transceiver clocks
- Plug-on module with 3 x 160-pin high-speed strips
  - 16 GTX high-performance transceiver
  - 2x GT transceiver clock inputs
  - 254 FPGA I/O's (125 LVDS pairs)
- On-board high-efficiency switch-mode DC-DC converters
- System management
- eFUSE bit-stream encryption
- AES bit-stream encryption
- Evenly-spread supply pins for good signal integrity
- User LED

Assembly options for cost or performance optimization available upon request.

Additional assembly options are available for cost or performance optimization upon request.

## Block Diagram

# TE0784-01

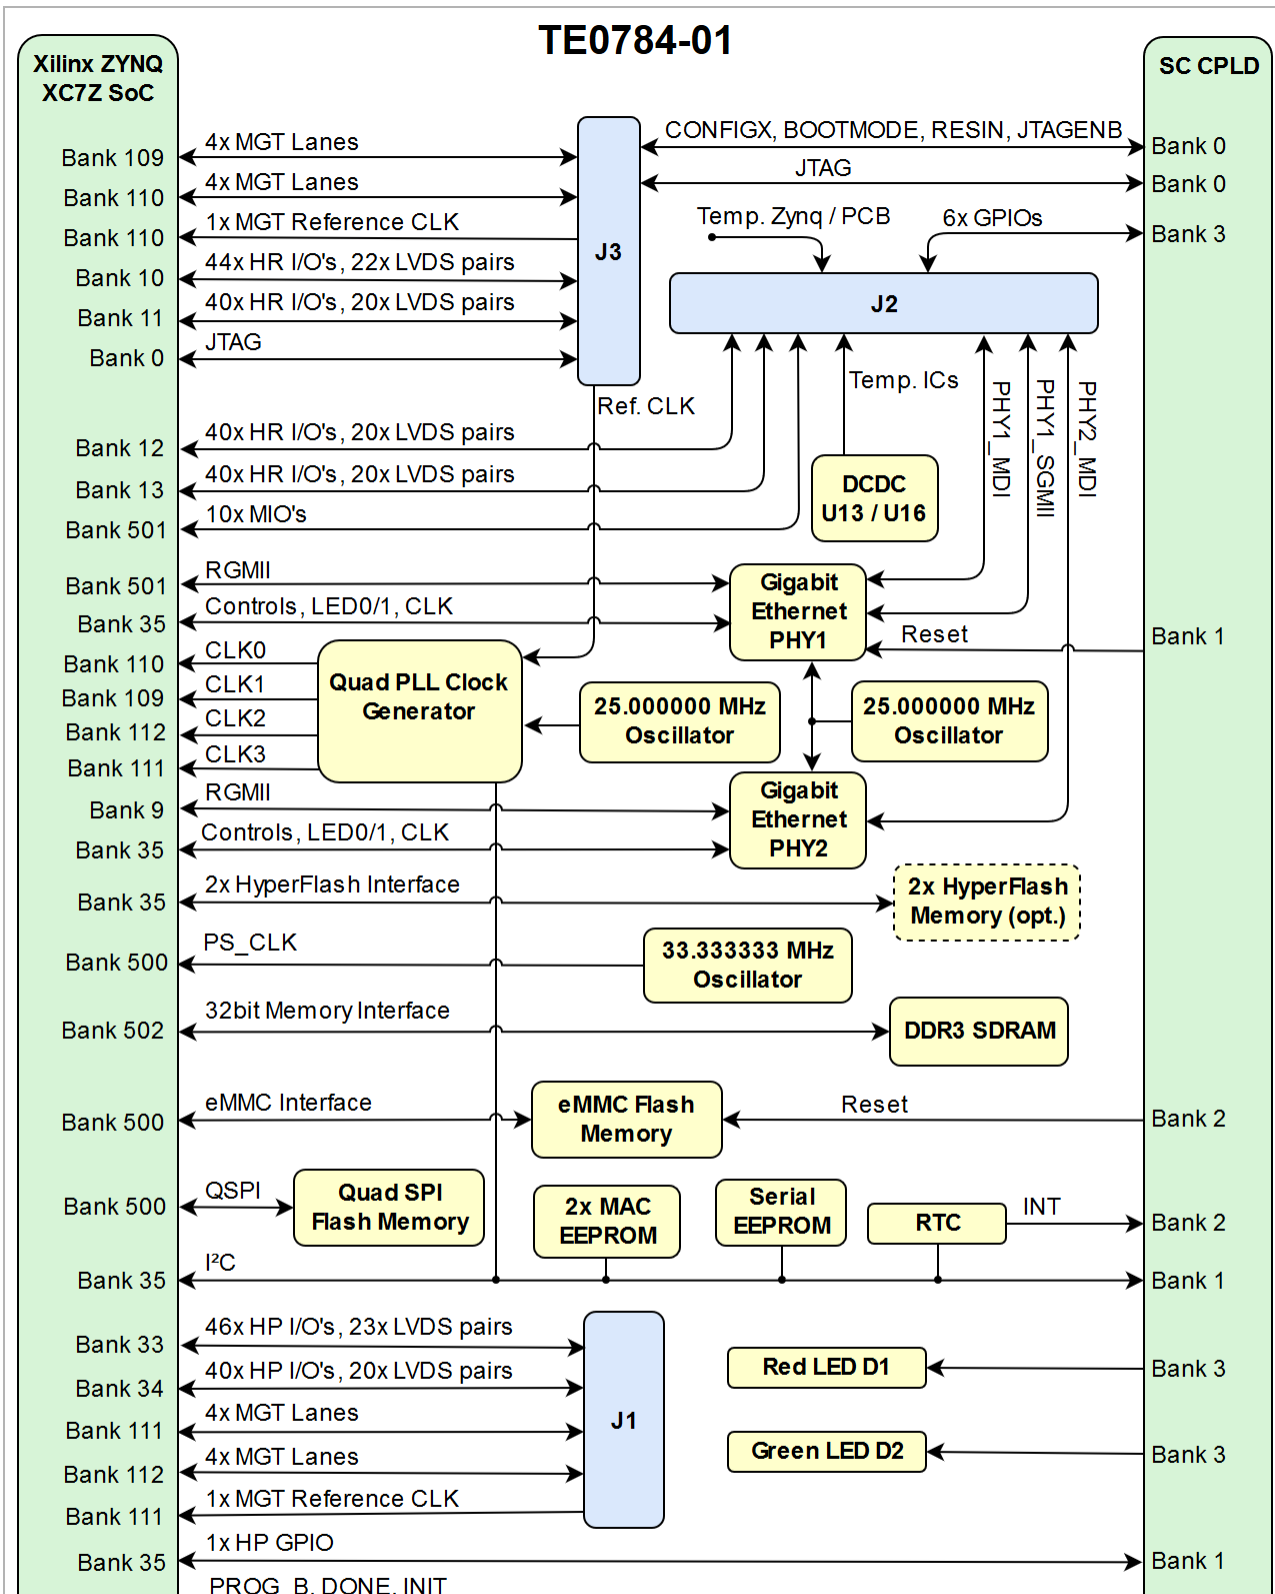

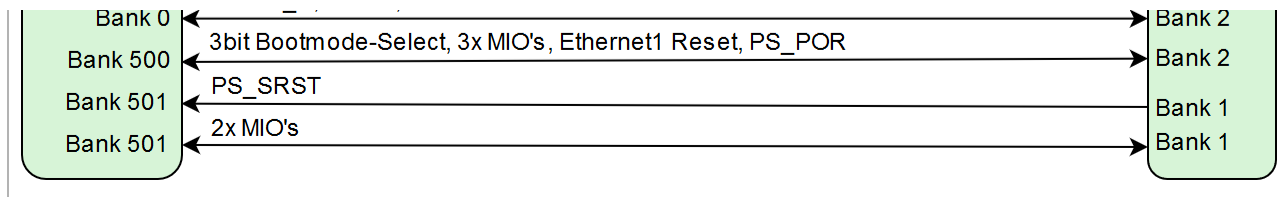


Figure 1: TE0782-02 block diagram

## Main Components

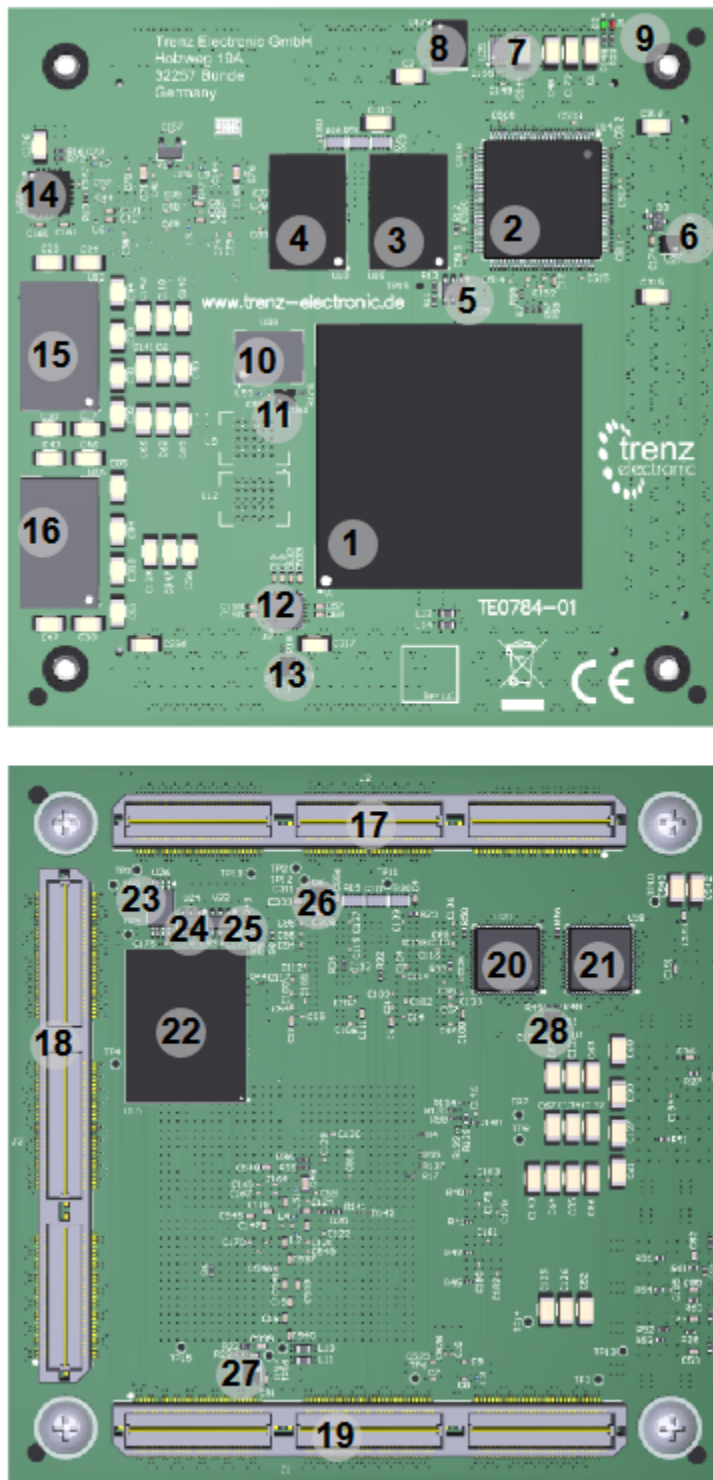


Figure 2: TE0782-02 main components

1. Xilinx Zynq-7000 SoC, U1
2. Lattice Semiconductor MachXO2 1200HC CPLD, U14
3. 4Gbit DDR3L SDRAM, U19
4. 4Gbit DDR3L SDRAM, U10
5. TI TPS3106 voltage monitor circuit, U4
6. TI TPS78018 LDO, U21
7. I<sup>2</sup>C voltage translator, U25
8. Intersil ISL12020MIRZ Real Time Clock, U17
9. Red LED D1, Green LED D2
10. 32 MByte QSPI Flash memory, U38
11. SiTime SiT8008 33.333333 MHz oscillator, U61
12. Si5338A programmable quad PLL clock generator, U2
13. SiTime SiT8008 25.000000 MHz oscillator, U3
14. TPS74801 LDO @1.5V, U23
15. LT quad 4A PowerSoC DC-DC converter (@1.0V), U13
16. LT quad 4A PowerSoC DC-DC converter (@3.3V, @1.8V, @1.2V\_MGT, @1.0V\_MGT), U16
17. Samtec ASP-122952-01 160-pin stacking strip (2 rows a 80 positions), J2
18. Samtec ASP-122952-01 160-pin stacking strip (2 rows a 80 positions), J3
19. Samtec ASP-122952-01 160-pin stacking strip (2 rows a 80 positions), J1
20. Marvell Alaska 88E1512 Gigabit Ethernet PHY, 20
21. Marvell Alaska 88E1512 Gigabit Ethernet PHY, U18
22. Micron Technology 4 GByte eMMC, U15
23. Microchip 128Kbit I<sup>2</sup>C EEPROM, U26
24. Microchip 2Kbit I<sup>2</sup>C MAC EEPROM, U24
25. Microchip 2Kbit I<sup>2</sup>C MAC EEPROM, U22
26. TPS51206 DDR reference voltage and termination regulator, U6
27. TPS799 LDO @1.8V\_MGT, U5
28. SiTime SiT8008 25.000000 MHz oscillator, U11

## Initial Delivery State

Storage device name	Content	Notes
24LC128-I/ST	not programmed	User content
24AA025E48 EEPROM's	User content not programmed	Valid MAC Address from manufacturer
Si5338A OTP Area	not programmed	-
eMMC Flash Memory	Empty, not programmed	Except serial number programmed by flash vendor
SPI Flash OTP Area	Empty, not programmed	Except serial number programmed by flash vendor
SPI Flash Quad Enable bit	Programmed	-
SPI Flash main array	demo design	-
HyperFlash Memory	not programmed	-
eFUSE USER	Not programmed	-
eFUSE Security	Not programmed	-

**Table 1:** Initial delivery state of programmable devices on the module

## Boot Process

4 of the 7 boot mode strapping pins (MIO2 ... MIO8) of the Xilinx Zynq-7000 SoC device are hardware programmed on the board, 3 of them are set by the SC CPLD firmware. The boot strapping pins are evaluated by the Zynq device soon after the 'PS\_POR' signal is deasserted to begin the boot process (see section "Boot Mode Pin Settings" of Xilinx manual UG585).

The TE0784 board is programmed in the SC CPLD firmware to boot initially from the on-board QSPI Flash memory U38. See section bootmode in the [TE0784 SC CPLD reference Wiki page](#).

The JTAG interface of the module is provided for storing the data to the QSPI Flash memory through the Zynq-7000 device.

## Signals, Interfaces and Pins

### Board to Board (B2B) I/Os

Zynq-7000 SoC's I/O banks signals connected to the B2B connectors:

Bank	Type	B2B Connector	I/O Signal Count	Differential	Voltage	Notes
10	HR	J3	44	22	User	Max voltage 3.3V
11	HR	J3	40	20	User	Max voltage 3.3V
12	HR	J2	40	20	User	Max voltage 3.3V
13	HR	J2	40	20	User	Max voltage 3.3V
33	HP	J1	48	23	User	Max voltage 1.8V
34	HP	J1	42	20	User	Max voltage 1.8V

**Table 2:** General overview of board to board I/O signals

For detailed information about the pin-out, please refer to the [Pin-out table](#).

### MGT Lanes

The Xilinx Zynq-7000 SoC used on the TE0784 module has 16 MGT transceiver lanes. All of them are wired directly to B2B connectors J1 and J3. MGT (Multi Gigabit Transceiver) lane consists of one transmit and one receive (TX/RX) differential pairs, four signals total per one MGT lane with data transmission rates up to 12.5Gb/s per lane (Xilinx GTX transceiver). Following table lists lane number, FPGA bank number, transceiver type, signal schematic name, board-to-board pin connection and FPGA pins connection:

Bank	Type	Lane	Signal Name	B2B Pin	FPGA Pin
109	GTX	0	<ul style="list-style-type: none"><li>MGT_RX0_P</li><li>MGT_RX0_N</li><li>MGT_TX0_P</li><li>MGT_TX0_N</li></ul>	<ul style="list-style-type: none"><li>J3-32</li><li>J3-30</li><li>J3-31</li><li>J3-29</li></ul>	<ul style="list-style-type: none"><li>MGTXRX0_109</li><li>MGTXRXN0_109</li><li>MGTTXP0_109</li><li>MGTTXN0_109</li></ul>
		1	<ul style="list-style-type: none"><li>MGT_RX1_P</li><li>MGT_RX1_N</li><li>MGT_TX1_P</li><li>MGT_TX1_N</li></ul>	<ul style="list-style-type: none"><li>J3-28</li><li>J3-26</li><li>J3-27</li><li>J3-25</li></ul>	<ul style="list-style-type: none"><li>MGTXRX1_109</li><li>MGTXRXN1_109</li><li>MGTTXP1_109</li><li>MGTTXN1_109</li></ul>
		2	<ul style="list-style-type: none"><li>MGT_RX2_P</li><li>MGT_RX2_N</li><li>MGT_TX2_P</li><li>MGT_TX2_N</li></ul>	<ul style="list-style-type: none"><li>J3-24</li><li>J3-22</li><li>J3-23</li><li>J3-21</li></ul>	<ul style="list-style-type: none"><li>MGTXRX2_109</li><li>MGTXRXN2_109</li><li>MGTTXP2_109</li><li>MGTTXN2_109</li></ul>

		3	<ul style="list-style-type: none"> <li>• MGT_RX3_P</li> <li>• MGT_RX3_N</li> <li>• MGT_TX3_P</li> <li>• MGT_TX3_N</li> </ul>	<ul style="list-style-type: none"> <li>• J3-20</li> <li>• J3-18</li> <li>• J3-19</li> <li>• J3-17</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P3_109</li> <li>• MGTXRXN3_109</li> <li>• MGTTX_P3_109</li> <li>• MGTTXN3_109</li> </ul>
110	GTX	0	<ul style="list-style-type: none"> <li>• MGT_RX4_P</li> <li>• MGT_RX4_N</li> <li>• MGT_TX4_P</li> <li>• MGT_TX4_N</li> </ul>	<ul style="list-style-type: none"> <li>• J3-16</li> <li>• J3-14</li> <li>• J3-15</li> <li>• J3-13</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P0_110</li> <li>• MGTXRXN0_110</li> <li>• MGTTX_P0_110</li> <li>• MGTTXN0_110</li> </ul>
		1	<ul style="list-style-type: none"> <li>• MGT_RX5_P</li> <li>• MGT_RX5_N</li> <li>• MGT_TX5_P</li> <li>• MGT_TX5_N</li> </ul>	<ul style="list-style-type: none"> <li>• J3-12</li> <li>• J3-10</li> <li>• J3-11</li> <li>• J3-9</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P1_110</li> <li>• MGTXRXN1_110</li> <li>• MGTTX_P1_110</li> <li>• MGTTXN1_110</li> </ul>
		2	<ul style="list-style-type: none"> <li>• MGT_RX6_P</li> <li>• MGT_RX6_N</li> <li>• MGT_TX6_P</li> <li>• MGT_TX6_N</li> </ul>	<ul style="list-style-type: none"> <li>• J3-8</li> <li>• J3-6</li> <li>• J3-7</li> <li>• J3-5</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P2_110</li> <li>• MGTXRXN2_110</li> <li>• MGTTX_P2_110</li> <li>• MGTTXN2_110</li> </ul>
		3	<ul style="list-style-type: none"> <li>• MGT_RX7_P</li> <li>• MGT_RX7_N</li> <li>• MGT_TX7_P</li> <li>• MGT_TX7_N</li> </ul>	<ul style="list-style-type: none"> <li>• J3-4</li> <li>• J3-2</li> <li>• J3-3</li> <li>• J3-1</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P3_110</li> <li>• MGTXRXN3_110</li> <li>• MGTTX_P3_110</li> <li>• MGTTXN3_110</li> </ul>
111	GTX	0	<ul style="list-style-type: none"> <li>• MGT_RX8_P</li> <li>• MGT_RX8_N</li> <li>• MGT_TX8_P</li> <li>• MGT_TX8_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-1</li> <li>• J1-3</li> <li>• J1-2</li> <li>• J1-4</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P0_111</li> <li>• MGTXRXN0_111</li> <li>• MGTTX_P0_111</li> <li>• MGTTXN0_111</li> </ul>
		1	<ul style="list-style-type: none"> <li>• MGT_RX9_P</li> <li>• MGT_RX9_N</li> <li>• MGT_TX9_P</li> <li>• MGT_TX9_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-5</li> <li>• J1-7</li> <li>• J1-6</li> <li>• J1-8</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P1_111</li> <li>• MGTXRXN1_111</li> <li>• MGTTX_P1_111</li> <li>• MGTTXN1_111</li> </ul>
		2	<ul style="list-style-type: none"> <li>• MGT_RX10_P</li> <li>• MGT_RX10_N</li> <li>• MGT_TX10_P</li> <li>• MGT_TX10_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-9</li> <li>• J1-11</li> <li>• J1-10</li> <li>• J1-12</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P2_111</li> <li>• MGTXRXN2_111</li> <li>• MGTTX_P2_111</li> <li>• MGTTXN2_111</li> </ul>
		3	<ul style="list-style-type: none"> <li>• MGT_RX11_P</li> <li>• MGT_RX11_N</li> <li>• MGT_TX11_P</li> <li>• MGT_TX11_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-13</li> <li>• J1-15</li> <li>• J1-14</li> <li>• J1-16</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P3_111</li> <li>• MGTXRXN3_111</li> <li>• MGTTX_P3_111</li> <li>• MGTTXN3_111</li> </ul>
112	GTX	0	<ul style="list-style-type: none"> <li>• MGT_RX12_P</li> <li>• MGT_RX12_N</li> <li>• MGT_TX12_P</li> <li>• MGT_TX12_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-17</li> <li>• J1-19</li> <li>• J1-18</li> <li>• J1-20</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P0_112</li> <li>• MGTXRXN0_112</li> <li>• MGTTX_P0_112</li> <li>• MGTTXN0_112</li> </ul>
		1	<ul style="list-style-type: none"> <li>• MGT_RX13_P</li> <li>• MGT_RX13_N</li> <li>• MGT_TX13_P</li> <li>• MGT_TX13_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-21</li> <li>• J1-23</li> <li>• J1-22</li> <li>• J1-24</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX_P1_112</li> <li>• MGTXRXN1_112</li> <li>• MGTTX_P1_112</li> <li>• MGTTXN1_112</li> </ul>



		2	<ul style="list-style-type: none"> <li>• MGT_RX14_P</li> <li>• MGT_RX14_N</li> <li>• MGT_TX14_P</li> <li>• MGT_TX14_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-25</li> <li>• J1-27</li> <li>• J1-26</li> <li>• J1-28</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX2_112</li> <li>• MGTXRXN2_112</li> <li>• MGTTX2P_112</li> <li>• MGTTXN2_112</li> </ul>
		3	<ul style="list-style-type: none"> <li>• MGT_RX15_P</li> <li>• MGT_RX15_N</li> <li>• MGT_TX15_P</li> <li>• MGT_TX15_N</li> </ul>	<ul style="list-style-type: none"> <li>• J1-29</li> <li>• J1-31</li> <li>• J1-30</li> <li>• J1-32</li> </ul>	<ul style="list-style-type: none"> <li>• MGTXRX3_112</li> <li>• MGTXRXN3_112</li> <li>• MGTTX3P_112</li> <li>• MGTTXN3_112</li> </ul>

**Table 3:** MGT lanes

There are 2 clock sources for the GTX transceivers. MGT\_CLK1 and MGT\_CLK4 are connected directly to B2B connector J3 and J1, so the clock can be provided by the carrier board. Clocks MGT\_CLK0, MGT\_CLK3, MGT\_CLK5 and MGT\_CLK6 are provided by the on-board clock generator (U2). As there are no capacitive coupling of the data and clock lines that are connected to the connectors, these may be required on the user's PCB depending on the application.

Bank	Type	Clock signal	Source	FPGA Pin	Notes
109	GTX	MGT_CLK3_P	U2, CLK3A	MGTREFCLK1P_109, AF10	Supplied by on-board Si5338A
		MGT_CLK3_N	U2, CLK3B	MGTREFCLK1N_109, AF9	
110	GTX	MGT_CLK0_P	U2, CLK2A	MGTREFCLK0P_110, AA8	Supplied by on-board Si5338A
		MGT_CLK0_N	U2, CLK2B	MGTREFCLK0N_110, AA7	
		MGT_CLK1_N	J3-39	MGTREFCLK1P_110, AC8	Supplied by B2B connector J3
		MGT_CLK1_P	J3-37	MGTREFCLK1N_110, AA7	
111	GTX	MGT_CLK4_N	J1-40	MGTREFCLK0P_111, U8	Supplied by B2B connector J1
		MGT_CLK4_P	J1-38	MGTREFCLK0N_111, U7	
		MGT_CLK5_P	U2, CLK1A	MGTREFCLK1P_111, W8	Supplied by on-board Si5338A
		MGT_CLK5_N	U2, CLK1B	MGTREFCLK1N_111, W7	
112	GTX	MGT_CLK6_P	U2, CLK0A	MGTREFCLK0P_112, N8	Supplied by on-board Si5338A
		MGT_CLK6_N	U2, CLK0B	MGTREFCLK0N_112, N7	

**Table 4:** MGT reference clock sources

## JTAG Interface

JTAG access to the Xilinx Zynq-7000 is provided through B2B connector J3.

JTAG Signal	B2B Connector Pin
TMS	J3-142
TDI	J3-147
TDO	J3-148
TCK	J3-141

**Table 5:** Zynq JTAG interface signals

JTAG access to the LCMXO2-1200HC System Controller CPLD U14 is provided through B2B connector J3.

JTAG Signal	B2B Connector Pin
M_TMS	J3-82
M_TDI	J3-87
M_TDO	J3-88
M_TCK	J3-81

**Table 6:** System Controller CPLD JTAG interface signals

Pin J3-136 'JTAGENB' of B2B connector J3 is used to access the JTAG interface of the SC CPLD. Set high to program the System Controller CPLD via JTAG interface.

## System Controller CPLD I/O Pins

Special purpose pins are connected to System Controller CPLD and have following default configuration:

Pin Name	Direction	Function	Default Configuration
BOOTMODE	in	in	signal forwarded to MIO9 and currently used as UART RX line
CONFIGX	in	out	signal forwarded to MIO8 and currently used as UART TX line
RESIN	in	nRESET	external Board Reset
M_TDO	out	CPLD JTAG interface	-
M_TDI	in		
M_TCK	in		
M_TMS	in		
JTAGENB	in	enable JTAG	pull high for programming SC CPLD firmware
I2C_SCL	in / out	I <sup>2</sup> C data line	I <sup>2</sup> C bus of board
I2C_SDA	in	I <sup>2</sup> C clock	
CPLD_IO	in / out	user GPIO	currently not used
ETH1_RESET	out	reset GbE PHY U18	see current SC CPLD firmware
RTC_INT	in	interrupt	interrupt from RTC
PS_SRST	out	Zynq control signal	reset PS of Zynq-7000 SoC
DONE	in		PL configuration completed
PROG_B	out		PL configuration reset signal
INIT	in		Low active FPGA initialization pin or configuration error signal
PS_POR	out		PS power-on reset
BM0/MIO5	out		Bootmode Pins  currently configured in SC CPLD firmware to boot from QSPI Flash
BM2/MIO4	out		
BM3/MIO2	out		
MIO8	in	user MIO pins	currently used as UART interface
MIO9	out		

PS_MIO50	in / out		available to user
PS_MIO51	in / out		
OTG-RST33 (MIO0)	in / out		
MMC_RST	out	Reset MMC Flash	see current SC CPLD firmware
ETH1-RESET33	in	reset GbE PHY U18	reset signal from Zynq-7000 level shifted to 1.8V
LED1 ... LED2	out	LED status signal	see current CPLD firmware
CPLD_GPIO0 ... CPLD_GPIO5	in / out	user GPIO	currently not used
EN_1V	out	Power control	enable signal DCDC U13 '1V'
PG_1V	in		power good signal DCDC U13 '1V'
EN_1.0V_MGT	out		enable signal DCDC U16 '1.0V_MGT'
PG_1.0V_MGT	in		power good signal DCDC U16 '1.0V_MGT'
EN_1.2V_MGT	out		enable signal DCDC U16 '1.2V_MGT'
PG_1.2V_MGT	in		power good DCDC U16 '1.2V_MGT'
EN_1.8V	out		enable signal DCDC U16 '1.8V'
PG_1.8V	in		power good signal DCDC U16 '1.8V'
EN_3.3V	out		enable signal DCDC U16 '3.3V'
PG_3.3V	in		power good signal DCDC U16 '3.3V'
PG_1V5	in		power good signal DCDC U23 '1.5V'
PS_POR_RST	in		Reset signal from voltage monitor circuit

**Table 7:** System Controller CPLD special purpose pins.

See also [TE0784 CPLD](#) reference Wiki page.

## Default PS MIO Mapping

MIO	Function	Connected to
0	user dependent	SC CPLD bank 2
1	QSPI0	SPI Flash-CS
2	QSPI0	SPI Flash-DQ0
3	QSPI0	SPI Flash-DQ1
4	QSPI0	SPI Flash-DQ2
5	QSPI0	SPI Flash-DQ3
6	QSPI0	SPI Flash-SCK
7	Ethernet PHY1 Reset	SC CPLD (used level translator)
8	UART TX	output, muxed to B2B by the SC CPLD
9	UART RX	input, muxed to B2B by the SC CPLD
10	SDIO1 D0	eMMC DAT0
11	SDIO1 CMD	eMMC CMD
12	SDIO1 CLK	eMMC CLK

13	SDIO1 D1	eMMC DAT1
14	SDIO1 D2	eMMC DAT2
15	SDIO1 D3	eMMC DAT3
16..27	ETH0	Ethernet RGMII PHY
28..39	-	not connected
40...45	6x user MIO's (usable as SDIO)	B2B connector J2
49...49	4x user MIO's	B2B connector J2
50...51	2x user MIO's	SC CPLD bank 1
52	ETH0 MDC	-
53	ETH0 MDIO	-

**Table 8:** Zynq PS MIO mapping

## Gigabit Ethernet

The TE0784 is equipped with two Marvell Alaska 88E1512 Gigabit Ethernet PHYs (U18 (ETH1) and U20 (ETH2)). The transceiver PHY of ETH1 is connected to the Zynq PS Ethernet GEM0. The I/O Voltage is fixed at 1.8V for HSTL signaling.

RGMII interface of ETH2 is connected to PL bank 9 of Zynq SoC.

The control lines of both PHYs are connected to PL bank 35.

The reference clock input for both PHYs is supplied from an on board 25MHz oscillator (U11), the 125MHz output clock of both PHYs are connected to PL bank 35.

### ETH1 PHY connection:

PHY PIN	Zynq PS / PL	System Controller CPLD	Notes
MDC/MDIO	MIO52, MIO53	-	-
LED0	Bank 35, Pin B12	-	-
LED1	Bank 35, Pin C12	-	-
Interrupt	Bank 35, Pin A15	-	-
CONFIG	Bank 35, Pin F14	-	When pin connected to GND, PHY Address is strapped to 0x00 by default
RESETn	-	Pin 53	ETH1_RESET33 (MIO7) -> SC CPLD -> ETH1_RESET
RGMII	MIO16..MIO27		-
MDI	-	-	on B2B J2 connector

**Table 9:** General overview of the Gigabit Ethernet1 PHY signals

### ETH2 PHY connection:

PHY PIN	Zynq PS / PL	System Controller CPLD	Notes
MDC/MDIO	Bank 35, Pin C17/B17	-	-
LED0	Bank 35, Pin K15	-	-

LED1	Bank 35, Pin B16	-	-
Interrupt	Bank 35, Pin A17	-	-
CONFIG	Bank 35, Pin E15	-	When pin connected to GND, PHY Address is strapped to 0x00 by default
RESETn	Bank 35, Pin B15	-	-
RGMII	Bank 9	-	-
MDI	-	-	on B2B J2 connector

**Table 10:** General overview of the Gigabit Ethernet2 PHY signals

## I2C Interface

The on-board I<sup>2</sup>C components are connected to bank 35 pins L15 (I2C\_SDA) and L14 (I2C\_SCL).

I<sup>2</sup>C addresses for on-board components:

Device	IC	Designator	I2C-Address	Notes
EEPROM	24LC128-I/ST	U26	0x53	user data
EEPROM	24AA025E48T-I/OT	U22	0x50	MAC address EEPROM
EEPROM	24AA025E48T-I/OT	U24	0x51	MAC address EEPROM
RTC	ISL12020MIRZ	U17	0x6F	Temperature compensated real time clock
Battery backed RAM	ISL12020MIRZ	U17	0x57	Integrated in RTC
PLL	SI5338A-B-GMR	U2	0x70	-
SC CPLD	LCMXO2-1200HC-4TG100I	U14	user	-

**Table 11:** Address table of the I<sup>2</sup>C bus slave devices

## Pin Definitions

Pins with names ending with \_VRN and \_VRP are connected to Zynq PL HP bank special purpose pins VRN/VRP and can be routed to DCI calibration resistors on the baseboard. Otherwise they are usable as general purpose I/Os.

Bank 35 has 100 ohm DCI calibration resistors installed, it is also possible to "borrow" the DCI calibration from bank 35 for banks 34 and 33. For more detailed information about the DCI check Xilinx documentation.

## On-board Peripherals

### System Controller CPLD

The System Controller CPLD (U14) is provided by Lattice Semiconductor LCMXO2-1200HC (MachXO2 product family). It is the central system management unit with module specific firmware installed to monitor and control various signals of the FPGA, on-board peripherals, I/O interfaces and module as a whole.

See also [TE0784 CPLD](#) reference Wiki page.

### eMMC Flash Memory

eMMC Flash memory device (U15) is connected to the Zynq PS MIO bank 500 pins MIO10..MIO15. eMMC chips MTFC4GMVEA-4M IT (Flash NAND-IC 2x 16 Gbit) is used with 4 GByte of memory density.

## DDR3L Memory

By default TE0782-02 module has two 16-bit wide IM (Intelligent Memory) IM4G16D3FABG-125I DDR3L SDRAM (DDR3-1600 Speedgrade) chips (U10, U19) arranged into 32-bit wide memory bus providing total of 1 GBytes of on-board RAM.

## Quad SPI Flash Memory

Two quad SPI compatible serial bus flash memory for FPGA configuration file storage is provided by Spansion S25FL256SAGBHI20 (U38) with 256 Mbit (32 MByte) memory density. After configuration completes the remaining free memory can be used for application data storage. All four SPI data lines are connected to the FPGA allowing x1, x2 or x4 data bus widths to be used. The maximum data transfer rate depends on the bus width and clock frequency.

## Gigabit Ethernet PHYs

On-board Gigabit Ethernet PHYs (U18, U20) are provided by Marvell Alaska 88E1512. The Ethernet PHYs' RGMII interfaces are connected to the Zynq's PS MIO bank 501 and to PL bank 9. I/O voltage is fixed at 1.8V for HSTL signaling. The reference clock input of both PHYs is supplied from an on-board 25.000000 MHz oscillator (U11).

## MAC Address EEPROMs

Two Microchip 24AA025E48 serial EEPROMs (U22, U24) contain globally unique 48-bit node address, which are compatible with EUI-48(TM) specification. The devices are organized as two blocks of 128 x 8 Kbit memory. One of the blocks stores the 48-bit node address and is write protected, the other block is available for application use. The MAC address EEPROMs are accessible over I<sup>2</sup>C bus (see also section I<sup>2</sup>C interface).

## Configuration EEPROM

The TE0782 board contains one EEPROM (U26) for configuration and general user purposes. The EEPROMs is provided by Microchip 24LC128-I/ST with 128 Kbit memory density, the EEPROM is accessible over I<sup>2</sup>C bus (see also section I<sup>2</sup>C interface).

## Programmable Clock Generator

There is a Silicon Labs I<sup>2</sup>C programmable clock generator Si5338A (U2) chip on-board. Its output frequencies can be programmed using the I<sup>2</sup>C bus address 0x70 or 0x71. Default address is 0x70, IN4/I2C\_LSB pin must be set to high for address 0x71.

A 25.000000 MHz oscillator (U3) is connected to the pin IN3 and is used to generate the output clocks. The output voltage of the oscillator is provided by the 1.8V power rail, thus making output frequency available as soon as 1.8V is present. All 4 of the Si5338 clock outputs are connected to the MGT banks of the Zynq device. It is possible to use the clocks connected to the GTR bank in the user's logic design. This is achieved by instantiating a IBUFDSGTE buffer in the design.

Once running, the frequency and other parameters can be changed by programming the device using the I<sup>2</sup>C bus connected between the FPGA (master) and clock generator (slave). For this, proper I<sup>2</sup>C bus logic has to be implemented in FPGA.

Signal	Frequency	Notes
IN1/IN2	user	External clock signal supply from B2B connector J3, pins J3-38 / J3-40
IN3	25.000000 MHz	Fixed input clock signal from reference clock generator SiT8008BI-73-18S-25.000000E (U3)
IN4	-	LSB of the default I <sup>2</sup> C address, wired to ground mean address is 0x70
IN5	-	Not connected
IN6	-	Wired to ground
CLK0 A/B	-	reference clock 0 of Bank 112 GTX
CLK1 A/B	-	reference clock 1 of Bank 111 GTX

CLK2 A/B	-	reference clock 0 of Bank 110 GTX
CLK3 A/B	-	reference clock 1 of Bank 109 GTX

**Table 12:** General overview of the on-board quad clock generator I/O signals

## Oscillators

The module has following reference clock signals provided by on-board oscillators and external source from carrier board:

Clock Source	Schematic Name	Frequency	Clock Destination
SiTime SiT8008AI oscillator, U61	PS_CLK	33.333333 MHz	Zynq SoC U1, pin A22
SiTime SiT8008BI oscillator, U21	-	25.000000 MHz	Quad PLL clock generator U2, pin 3
SiTime SiT8008AI oscillator, U7	-	52.000000 MHz	USB2 PHYs U4 and U8, pin 26
SiTime SiT8008BI oscillator, U11	-	25.000000 MHz	GbE PHYs U18 and U20, pin 34

**Table 13:** Reference clock signals

## On-board LEDs

LED	Color	Connected to	Description and Notes
D1	Red	System Controller CPLD U14, bank 3	Exact function is defined by SC CPLD firmware
D2	Green	System Controller CPLD U14, bank 3	

**Table 14:** On-board LEDs

## Power and Power-on Sequence

### Power Supply

Power supply with minimum current capability of 4A for system startup is recommended.

### Power Consumption

Power Input	Typical Current
VIN	TBD*
C3.3V	TBD*

**Table 15:** Power consumption

\* TBD - To Be Determined soon with reference design setup.



To avoid any damage to the module, check for stabilized on-board voltages should be carried out (i.e. power good and enable signals) before powering up any Zynq's I/O bank voltages VCCO\_x. All I/Os should be tri-stated during power-on sequence.

## Power Distribution Dependencies

The Trenz TE0784 SoM is equipped with two quad DC-DC voltage regulators to generate required on-board voltage levels 1V, 3.3V, 1.8V, 1.2V\_MGT, 1V\_MGT. Additional voltage regulators are used to generate voltages 1.5V, VTT, VTTREF and 1.8V\_MGT.

The power supply voltage 'C3.3V' of System Controller CPLD of the SoM have to be externally supplied with 3.3V nominal.

There are following dependencies how the initial voltages of the power rails on the B2B connectors are distributed to the on-board DC-DC converters, which power up further DC-DC converters and the particular on-board voltages:



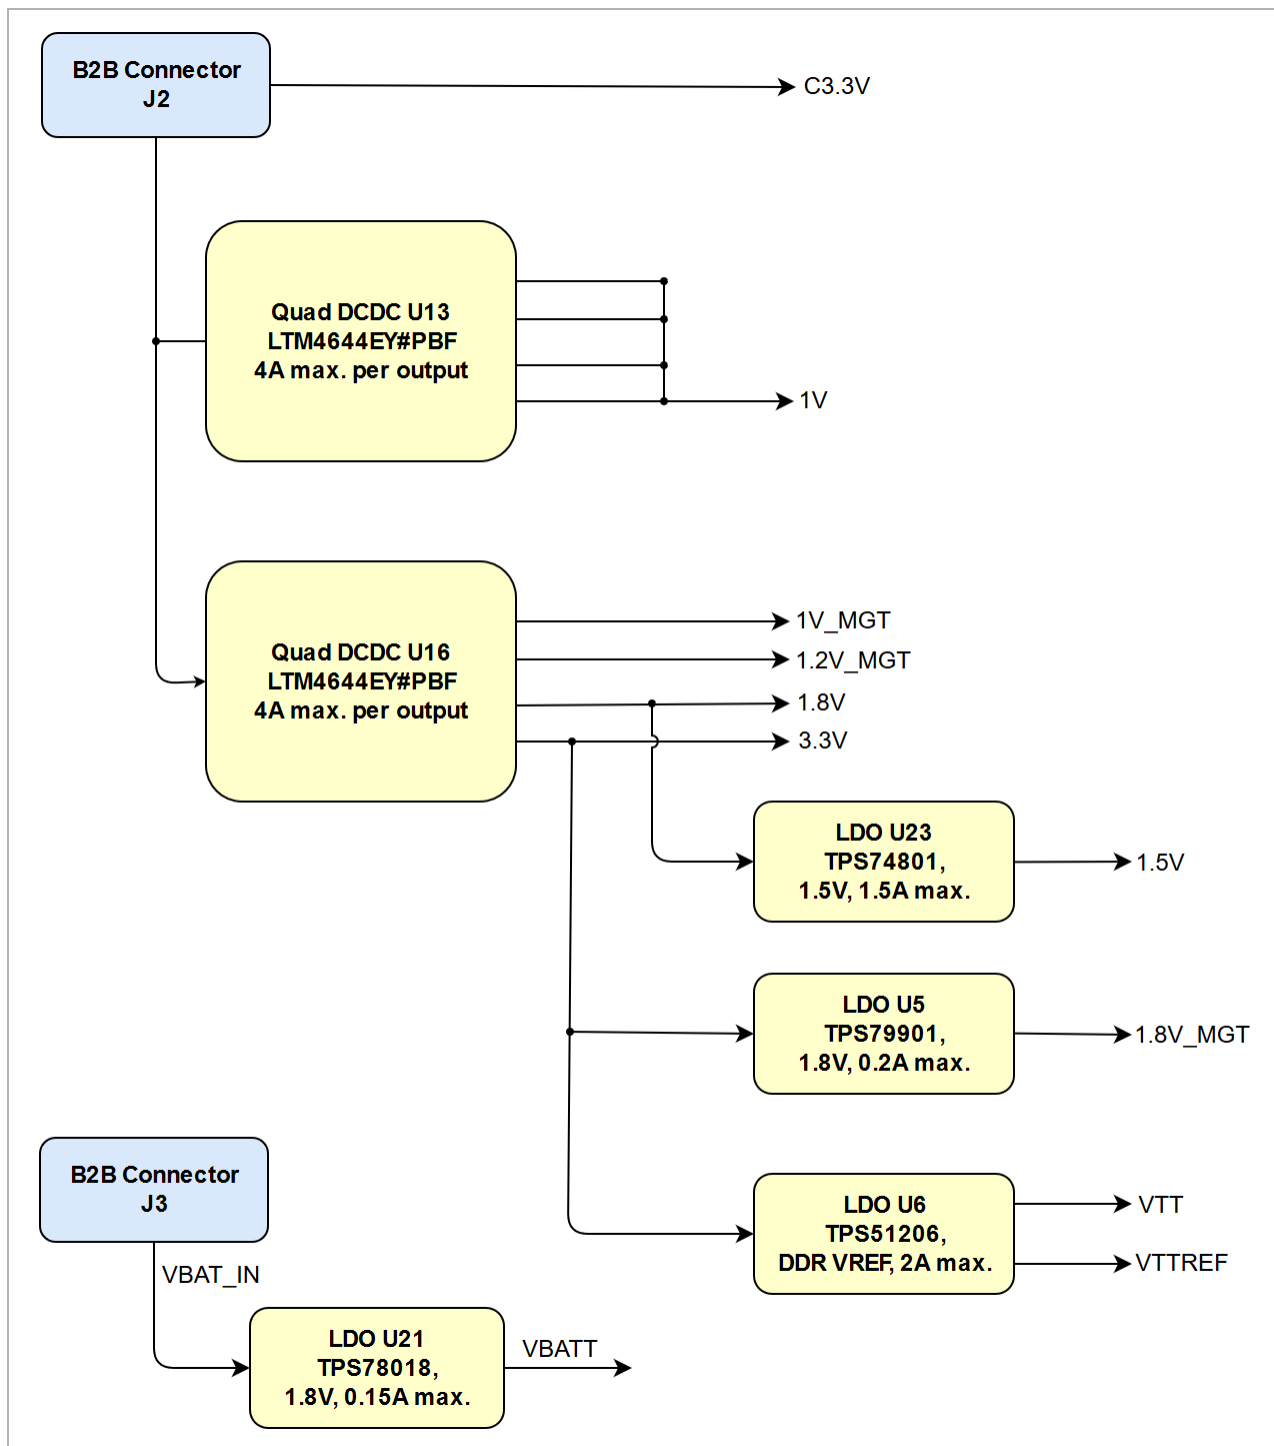


Figure 3: TE0782-02 Power Distribution Diagram

See also Xilinx datasheet DS191 for additional information. User should also check related base board documentation when intending base board design for TE0782 module.

## Power-On Sequence

Power-on sequence is handled by the System Controller CPLD using "Power good"-signals from the voltage regulators:

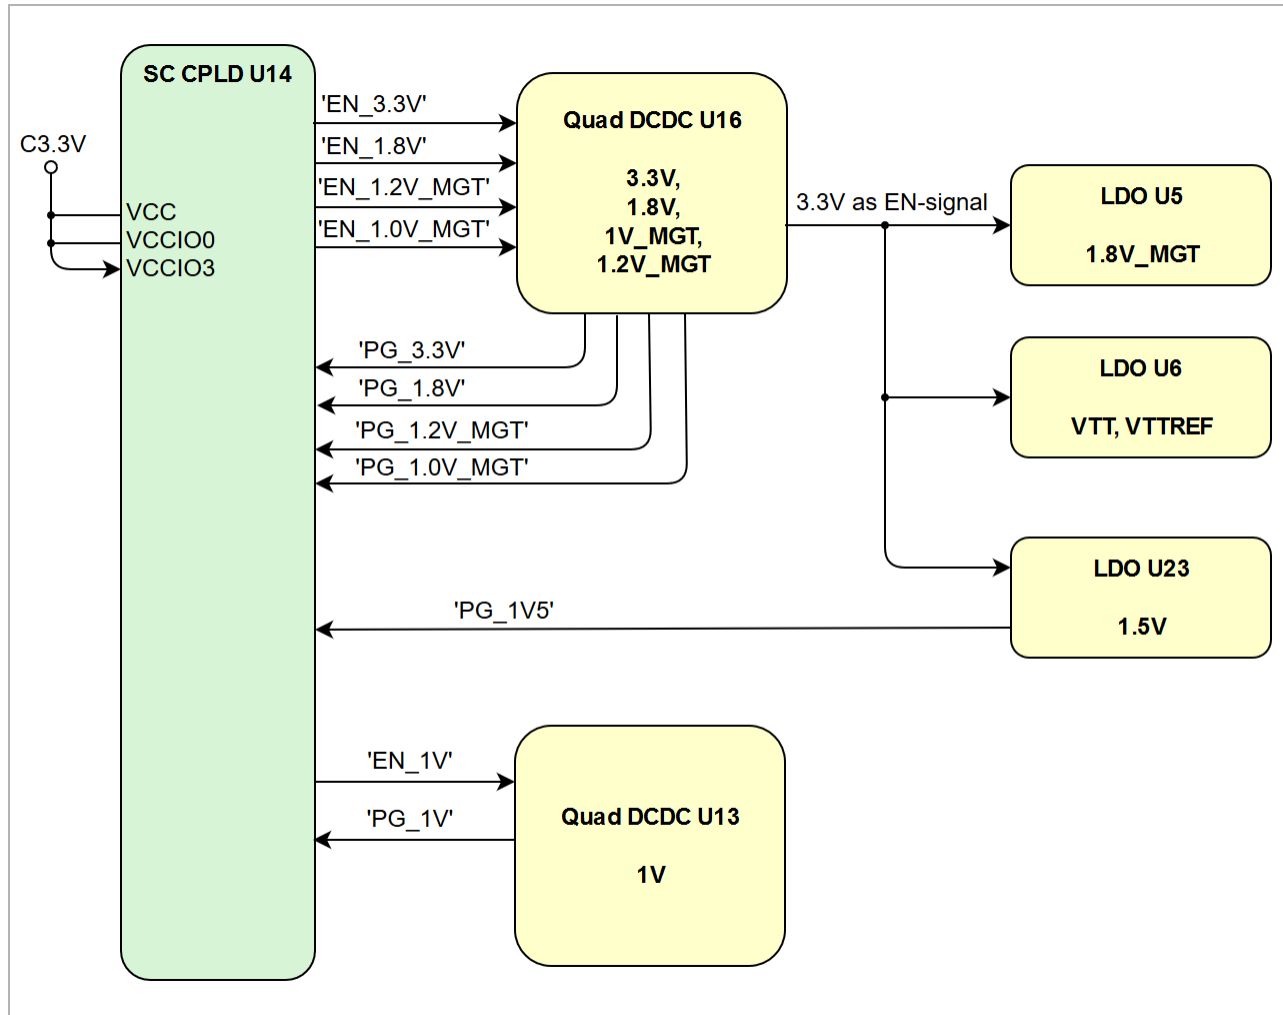


Figure 4: TE0782-02 Power-on Sequence Diagram

## Voltage Monitor Circuit

The voltages '1V' and '3.3V' are monitored by the voltage monitor circuit U4, which generates the PS\_POR\_RST reset signal if monitored voltages have transient interruptions. The reset signal is connected to the SC CPLD U14 and forwarded to the Zynq MIO bank 500 'PS\_POR' pin:

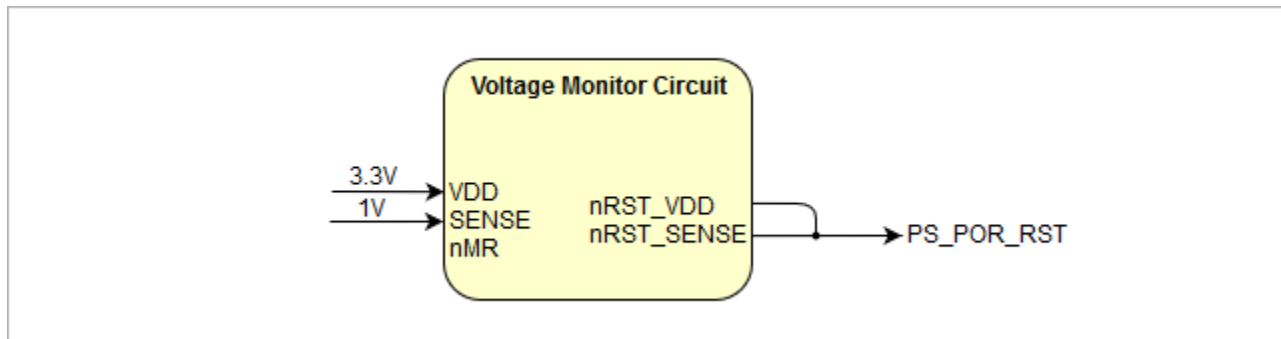


Figure 5: TE0784-01 Voltage Monitor Circuit

## Power Rails

Power Rail Name on B2B Connector	J1 Pins	J2 Pins	J3 Pins	Direction	Notes
VIN	-	165, 166, 167, 168	-	Input	external power supply voltage
C3.3V	-	147, 148	-	Input	external 3.3V power supply voltage
3.3V	-	111, 112, 123, 124, 135 136 169, 170, 171, 172	-	Output	internal 3.3V voltage level
1.8V	169, 170, 171, 172	-	-	Output	internal 1.8V voltage level
VCCIO_10	-	-	99, 100	Input	high range I/O bank voltage
VCCIO_11	-	-	159, 160	Input	high range I/O bank voltage
VCCIO_12	-	159, 160	-	Input	high range I/O bank voltage
VCCIO_13	-	99, 100	-	Input	high range I/O bank voltage
VCCIO_33	99, 100	-	-	Input	high performance I/O bank voltage
VCCIO_34	159, 160	-	-	Input	high performance I/O bank voltage
VBAT_IN	-	-	124	Input	backup battery voltage

Table 16: Module power rails

## Bank Voltages

Bank	Schematic Name	Voltage	Range	Notes
0	-	3.3 V	-	FPGA configuration
502	-	1.5 V	-	DDR3-RAM port
109 / 110 / 111 / 112	-	1.2 V	-	MGT
500 / 501	-	3.3 V	-	MIO banks
9 (HR)	-	1.8 V	1.2V to 3.3V	ETH2 RGMII
10 (HR)	VCCIO_10	user	1.2V to 3.3V	-
11 (HR)	VCCIO_11	user	1.2V to 3.3V	-
12 (HR)	VCCIO_12	user	1.2V to 3.3V	-
13 (HR)	VCCIO_13	user	1.2V to 3.3V	-
33 (HP)	VCCIO_33	user	1.2V to 1.8V	-

34 (HP)	VCCIO_34	user	1.2V to 1.8V	-
35 (HP)	-	1.8 V	1.2V to 1.8V	Hyper-RAM, Ethernet, I <sup>2</sup> C

**Table 17:** Module I/O bank voltages

See Xilinx Zynq-7000 datasheet DS191 for the voltage ranges allowed.

## Board to Board Connectors

8.5 x 8.5 SoMs have three Samtec Q Strip Socket on the bottom side.

- Module use 3 x ASP-122952-01 ( QTH-090-01-L-D-A) , (180 pins, "60" per bank)
- Carrier use 3 x ASP-122953-01 (QSH-090-01-F-D-A), (180 pins, "60" per bank)

Connector Specifications	Value
Insulator material	Black Liquid Crystal Polymer
Stacking height	5 mm
Contact material	Phosphor-bronze
Plating	Au or Sn over 50 μ" (1.27 μm) Ni
Current rating	2 A per pin (2 pins powered)
Operating temperature range	-55 °C to +125 °C
RoHS compliant	Yes

**Connector specifications.**

### Connector Mating height

When using the same type on baseboard, the mating height is 5mm. Other mating heights are possible by using connectors with a different height

Order number	Connector on baseboard	compatible to	Mating height
	ASP-122953-01	QTH-090-01-L-D-A	5 mm
	ASP-122952-01	QSH-090-01-F-D-A	5 mm

**Connectors.**

The module can be manufactured using other connectors upon request.

### Connector Speed Ratings

The Q Strip connector speed rating depends on the stacking height; please see the following table:

Stacking height	Speed rating
5 mm, Single-Ended	9.5 GHz
8 mm, Single-Ended	8.5 GHz
11 mm, Single-Ended	6 GHz
16 mm, Single-Ended	5.5 GHz

20 mm, Single-Ended	3.5 GHz
30 mm, Single-Ended	3 GHz
5 mm, Differential	10.5 GHz / 25Gbit/s
8 mm, Differential	8 GHz
11 mm, Differential	5 GHz
16 mm, Differential	6 GHz
20 mm, Differential	8.5 GHz
30 mm, Differential	1.5 GHz

#### Speed rating.

#### Current Rating

Current rating of Samtec Q Strip Socket B2B connectors is 2A per pin (2 adjacent pins powered).

#### Connector Mechanical Ratings

- Shock: 50 G, 11 ms half Sine
- Vibration: 7.3G random, 2 hours per axis, 3 axes total

#### Manufacturer Documentation

File	Modified
PDF File qsh.pdf	23 07, 2019 by Pedram Babakhani
PDF File qsh-xxx-01-x-d-xx-footprint.pdf	24 07, 2019 by Pedram Babakhani
PDF File qsh-xxx-01-x-d-xxx-mkt.pdf	24 07, 2019 by Pedram Babakhani
PDF File qth.pdf	23 07, 2019 by Pedram Babakhani
PDF File qth-xxx-xx-x-d-xxx-footprint.pdf	24 07, 2019 by Pedram Babakhani
PDF File qth-xxx-xx-x-d-xxx-mkt.pdf	24 07, 2019 by Pedram Babakhani

[Download All](#)

## Variants Currently In Production

<b>Trenz shop TE0784 overview page</b>	
<a href="#">English page</a>	<a href="#">German page</a>

## Technical Specifications

## Absolute Maximum Ratings

Parameter	Min	Max	Units	Notes
VIN supply voltage	-0.3	15	V	LTM4644 datasheet
C3.3V supply voltage	-0.3	3.6	V	LTM4644 datasheet
VBAT supply voltage	-0.3	6	V	TPS780180 datasheet
PS I/O supply voltage, VCCO_PSIO	-0.5	3.6	V	Xilinx document DS191
PS I/O input voltage	-0.4	VCCO_PSIO + 0.55	V	Xilinx document DS191
HP I/O bank supply voltage, VCCO	-0.5	2.0	V	Xilinx document DS191
HP I/O bank input voltage	-0.55	VCCO + 0.55	V	Xilinx document DS191
HR I/O bank supply voltage, VCCO	-0.5	3.6	V	Xilinx document DS191
HR I/O bank input voltage	-0.55	VCCO + 0.55	V	Xilinx document DS191
Reference Voltage pin	-0.5	2	V	Xilinx document DS191
Differential input voltage	-0.4	2.625	V	Xilinx document DS191
MGT reference clocks absolute input voltage	-0.5	1.32	V	Xilinx document DS191
MGT absolute input voltage	-0.5	1.26	V	Xilinx document DS191
Voltage on SC CPLD pins	-0.5	3.75	V	Lattice Semiconductor MachXO2 datasheet
Storage temperature	-40	+85	°C	See eMMC MTFC4GACAJCN datasheet

**Table 18:** Module absolute maximum ratings

## Recommended Operating Conditions

Parameter	Min	Max	Units	Notes
VIN supply voltage	11.4	12.6	V	LTM4644 datasheet, 12V nominal
C3.3V supply voltage	3.3	3.465	V	LCMXO2-256HC, LTM4644 datasheet
VBAT supply voltage	2.2	5.5	V	TPS780180 datasheet
PS I/O supply voltage, VCCO_PSIO	1.710	3.465	V	Xilinx document DS191
PS I/O input voltage	-0.20	VCCO_PSIO + 0.20	V	Xilinx document DS191
HP I/O banks supply voltage, VCCO	1.14	1.89	V	Xilinx document DS191
HP I/O banks input voltage	-0.20	VCCO + 0.20	V	Xilinx document DS191
HR I/O banks supply voltage, VCCO	1.14	3.465	V	Xilinx document DS191
HR I/O banks input voltage	-0.20	VCCO + 0.20	V	Xilinx document DS191
Differential input voltage	-0.2	2.625	V	Xilinx document DS191
Voltage on SC CPLD pins	-0.3	3.6	V	Lattice Semiconductor MachXO2 datasheet
Operating Temperature Range	-40	85	°C	Xilinx document DS191, industrial grade Zynq temperature range

**Table 19:** Recommended operating conditions

Module operating temperature range depends also on customer design and cooling solution. Please contact us for options.



See Xilinx datasheet DS191 for more information about absolute maximum and recommended operating ratings for the Zynq-7000 chips.

## Physical Dimensions

- Module size: 85 mm x 85 mm. Please download the assembly diagram for exact numbers.
- Mating height with standard connectors: 5 mm
- PCB thickness: 1.7 mm

All dimensions are shown in millimeters.

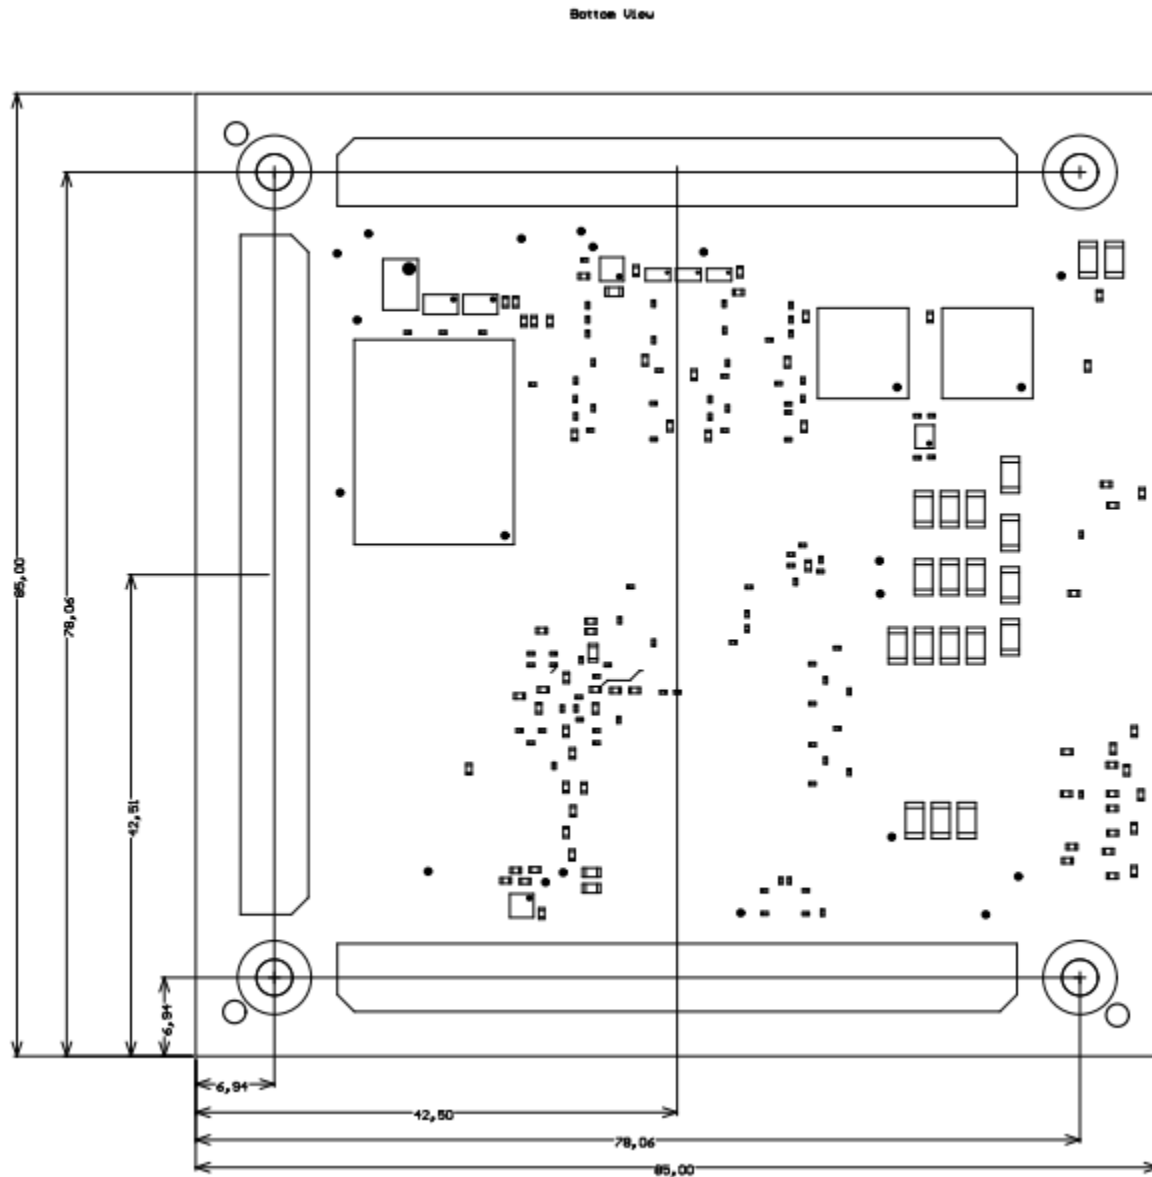


Figure 6: Module physical dimensions drawing

## Revision History

## Hardware Revision History

Date	Revision	Notes	PCN Link	Documentation Link
-	01	first production release	-	<a href="#">TE0784-01</a>

Table 20: Hardware revision history table



Figure 7: Module hardware revision number

## Document Change History

Date	Revision	Contributors	Description
------	----------	--------------	-------------



<p><b>Error rendering macro 'page-info'</b></p> <p>Ambiguous method overloading for method jdk.proxy279.\$Proxy4022#hasContentLevelPermission. Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due to overlapping prototypes between: [interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]</p>	<p><b>Error rendering macro 'page-info'</b></p> <p>Ambiguous method overloading for method jdk.proxy279.\$Proxy4022#hasContentLevelPermission. Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due to overlapping prototypes between: [interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]</p>	<p><b>Error rendering macro 'page-info'</b></p> <p>Ambiguous method overloading for method jdk.proxy279.\$Proxy4022#hasContentLevelPermission. Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due to overlapping prototypes between: [interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]</p>	<ul style="list-style-type: none"> <li>linked B2B</li> </ul>
2018-08-07	v.8	Ali Naseri	<ul style="list-style-type: none"> <li>Initial release</li> </ul>

--	all	<div> <p><b>Error rendering macro 'page-info'</b></p> <p>Ambiguous method overloading for method jdk.proxy279.\$Proxy4022#hasContentLevelPermission. Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due to overlapping prototypes between: [interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]</p> </div>	• --
----	-----	---	------

## Disclaimer

## Data Privacy

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

## Document Warranty

The material contained in this document is provided "as is" and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

## Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

## Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

## Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used /modified / copied only in accordance with the terms of such license.

## Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

## REACH, RoHS and WEEE

### REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of [REACH](#). The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no [SVHC \(Substances of Very High Concern\) on the Candidate List](#) are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the [European Chemicals Agency \(ECHA\)](#).

### RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

### WEEE

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

Ambiguous method overloading for method `jdk.proxy279.$Proxy4022#hasContentLevelPermission`. Cannot resolve which method to invoke for `[null, class java.lang.String, class com.atlassian.confluence.pages.Page]` due to overlapping prototypes between: `[interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]` `[interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]`