

TE0300 Configuration Switches


TE0300 Configuration Switches: settings for USB Firmware, FPGA bitstream programming, Power Supply and reset.

The micromodule hosts 4 DIP switches on the top side: [S1](#), [S2](#), [S3](#) and [S4](#).

- For customers requesting a sufficient amount of units, the micromodules can be manufactured replacing the switches by fixed connections.

DIP Switches Overview

The figure below summarizes functions and location of the four DIP switches.

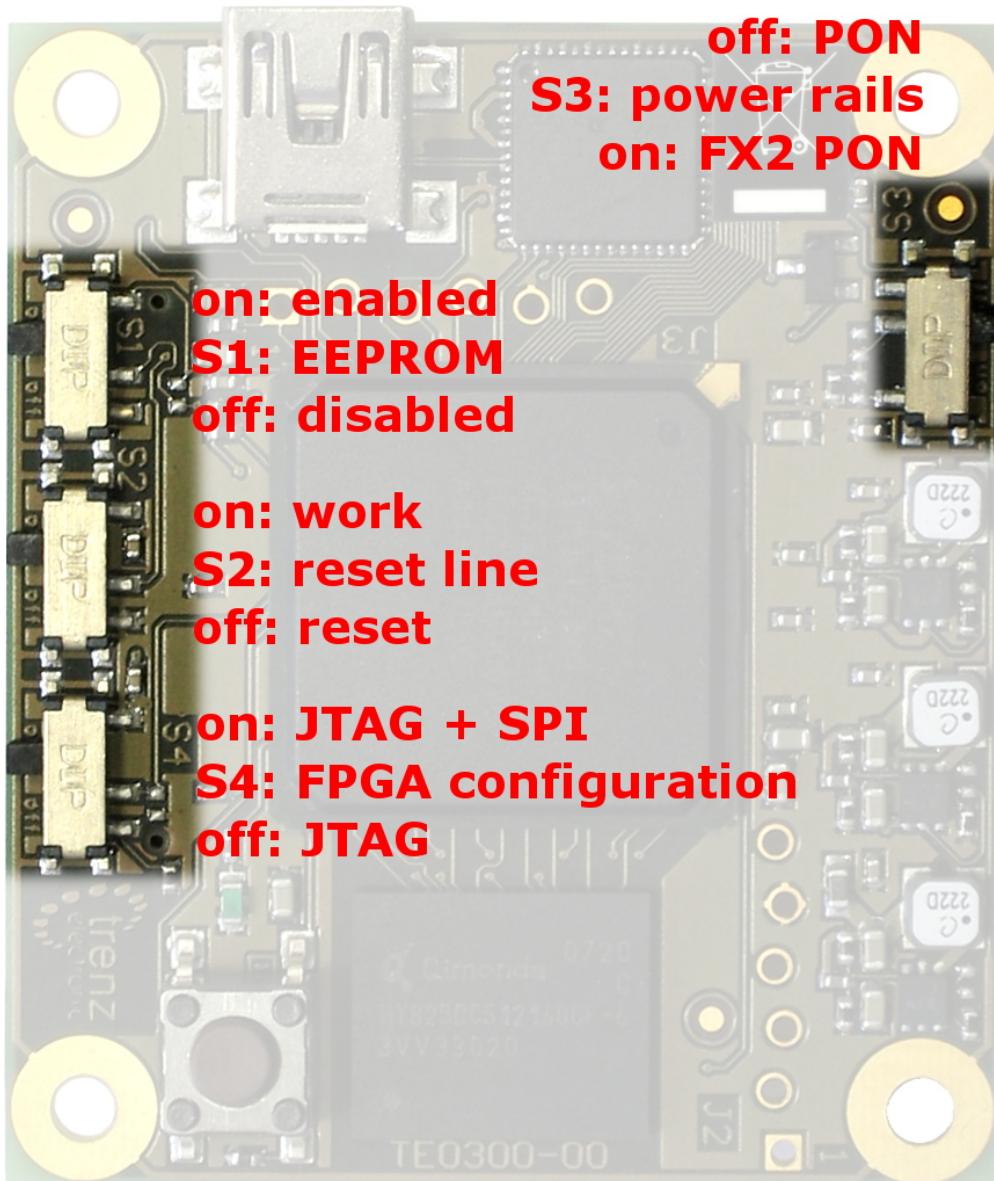

DIP switches overview