

# TE0807 StarterKit

## Table of contents

Linux with basic periphery of TE0807 Starterkit (TEBF0808 Carrier).

1 Overview

1.1 Key Features

Refer to <http://trenz.org/te0807-info> for the current online version of this manual and other available documentation.

1.2 Revision History

1.3 Release Notes and Know Issues

1.4 Requirements

- 1.4.1 Software
- 1.4.2 Hardware

1.5 Content

2 Design Flow

3 Linux

4 System Design - Vivado

- 4.1 Block Design
  - 4.1.1 PS Interfaces
  - 4.2 Constrains
    - 4.2.1 Basic module constrains
    - 4.2.2 Design specific constrain
- 5 Software Design - Vitis
  - 5.1 Application
    - 5.1.1 zynqmp\_fsbl
    - 5.1.2 zynqmp\_pmfw
    - 5.1.3 hello\_te0807
    - 5.1.4 u-boot
  - 6 Software Design - PetaLinux
    - 6.1 Config
    - 6.2 U-Boot
    - 6.3 Device Tree
  - 6.4 Kernel
  - 6.5 Rootfs
  - 6.6 FSBL patch (alternative vivado fsbl patch)
  - 6.7 Applications
    - 6.7.1 startup
    - 6.7.2 webfwu
  - 7 Additional Software
    - 7.1 S5345
  - 8 Appx. A: Change History and Legal Notices
    - 8.1 Document Change History
    - 8.2 Legal Notices
    - 8.3 Data Privacy
    - 8.4 Document Warranty
    - 8.5 Limitation of Liability
    - 8.6 Copyright Notice
    - 8.7 Technology Licenses
    - 8.8 Environmental Protection
    - 8.9 REACH, RoHS and WEEE
  - 9 Table of contents

Date	Project Built	Authors	Description
2023-08-17	TE0807-StarterKit-vivado_2022.2-build_6_20230817092640.zip TE0807-StarterKit_noprebuild-vivado_2022.2-build_6_20230817092640.zip	Manuela Strücker	<ul style="list-style-type: none"><li>2022.2 update</li><li>new assembly variants</li></ul>
2022-10-17	TE0807-StarterKit_noprebuild-vivado_2021.2-build_18_20221017093227.zip TE0807-StarterKit-vivado_2021.2-build_18_20221017093227.zip	Manuela Strücker	<ul style="list-style-type: none"><li>script update</li></ul>
2022-09-12	TE0807-StarterKit_noprebuild-vivado_2021.2-build_15_20220912085654.zip TE0807-StarterKit-vivado_2021.2-build_15_20220912085654.zip	Manuela Strücker	<ul style="list-style-type: none"><li>update board part file compatible to Vivado 2021.2.1</li></ul>

2022-05-19	2021.2	TE0807-StarterKit_noprebuilt-vivado_2021.2-build_14_20220519 081728.zip TE0807-StarterKit-vivado_2021.2-build_14_20220519 081728.zip	Manuela Strücker	<ul style="list-style-type: none"> <li>• 2021.2 update</li> <li>• new assembly variants</li> <li>• update document style</li> </ul>
2021-02-08	2020.2	TE0807-StarterKit_noprebuilt-vivado_2020.2-build_1_202102080 94502.zip TE0807-StarterKit-vivado_2020.2-build_1_202102080 93620.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• 2020.2 update</li> <li>• add boot.scr file</li> <li>• device tree has change</li> <li>• petalinux fsbl patch (betaversion)</li> </ul>
2020-10-06	2019.2	TE0807-StarterKit_noprebuilt-vivado_2019.2-build_15_20201006 122416.zip TE0807-StarterKit-vivado_2019.2-build_15_20201006 122402.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• new assembly variants</li> </ul>
2020-03-25	2019.2	TE0807-StarterKit_noprebuilt-vivado_2019.2-build_8_202003250 82944.zip TE0807-StarterKit-vivado_2019.2-build_8_202003250 82924.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• script update</li> </ul>
2020-02-19	2019.2	TE0807-StarterKit_noprebuilt-vivado_2019.2-build_5_202002191 24225.zip TE0807-StarterKit-vivado_2019.2-build_5_202002191 24212.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• add missing linux Boot.bin</li> <li>• small update for SI configuration (FSBL)</li> </ul>
2020-01-27	2019.2	TE0807-StarterKit_noprebuilt-vivado_2019.2-build_4_202001270 75822.zip TE0807-StarterKit-vivado_2019.2-build_4_202001270 75809.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• 2019.2 update</li> <li>• Vitis support</li> <li>• FSBL SI programming procedure update</li> <li>• petalinux device tree and u-boot update</li> </ul>

2019-05-22	2018.3	TE0807-StarterKit-vivado_2018.3-build_06_20190522132448.zip TE0807-StarterKit_noprebuilt-vivado_2018.3-build_06_20190522132504.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• TE Script update</li> <li>• rework of the FSBLs</li> <li>• some additional Linux features</li> <li>• MAC from EEPROM</li> <li>• new assembly variants</li> <li>• remove special compiler flags, which was needed in 2018.2</li> <li>• ES2 prebuilt files are not included</li> </ul>
2019-02-07	2018.2	TE0807-StarterKit_noprebuilt-vivado_2018.2-build_04_20190207111631.zip TE0807-StarterKit-vivado_2018.2-build_04_20190207111616.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• new assembly variant</li> </ul>
2018-09-04	2018.2	TE0807-StarterKit_noprebuilt-vivado_2018.2-build_03_20180904122245.zip TE0807-StarterKit-vivado_2018.2-build_03_20180904121600.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• small petalinux changes</li> <li>• IO renaming</li> <li>• PL Design changes</li> <li>• additional notes for FSBL generated with Win SDK</li> <li>• changed *.bif</li> </ul>
2018-05-24	2017.4	TE0807-StarterKit_noprebuilt-vivado_2017.4-build_10_20180524150124.zip TE0807-StarterKit-vivado_2017.4-build_10_20180524150106.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• solved Linux Flash issue</li> </ul>
2018-02-06	2017.4	TE0807-StarterKit_noprebuilt-vivado_2017.4-build_05_20180206082637.zip TE0807-StarterKit-vivado_2017.4-build_05_20180206082621.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• same CLK for VIO</li> </ul>
2018-02-05	2017.4	TE0807-StarterKit-vivado_2017.4-build_05_20180205101252.zip TE0807-StarterKit_noprebuilt-vivado_2017.4-build_05_20180205101306.zip	John Hartfiel	<ul style="list-style-type: none"> <li>• solved JTAG /Linux issue</li> </ul>

2018-01-18	2017.4	TE0807-StarterKit_noprebuild -vivado_2017.4- build_05_20180118 152938.zip TE0807-StarterKit- vivado_2017.4- build_05_20180118 152922.zip	John Hartfiel	<ul style="list-style-type: none"> <li>initial release</li> </ul>
------------	--------	---	---------------	---

#### Design Revision History

## Release Notes and Know Issues

Issues	Description	Workaround/Solution	To be fixed version
Xilinx Software	Incompatibility of board files for ZynqMP with eMMC activated between 2021.2 and 2021.2.1 patch, see <a href="#">Xilinx Forum Request</a>	use corresponding board files for the Vivado versions	--
MAC from EEPROM	The MAC address stored in the EEPROM is not read out and initialised correctly during start-up. This is caused by two I2C expanders each switched to the same EEPROM with the same address i2cswitch@73 --> i2c@5 --> reg = <0x50> and i2cswitch@77 --> i2c@4 --> reg = <0x50>	Switching the second I2C expander (i2cswitch@77) to another channel in the fsbl solves the error during the start-up procedure.	<b>Solved</b> with update
QSPI Flash	Flash programming is not supported with boot mode QSPI or SD.	If flash programming fails, configure device for JTAG boot mode and try again or use older Vivado Versions for programming. (Vivado 2020.2 or 2019.2)	--
Flash access on Linux	Device tree is not correct on Linux	add compatibility to "compatible "jedec,spi-nor""	<b>Solved</b> with 20180524 update
USB UART Terminal is blocked / SDK Debugging is blocked	This happens only with 2017.4 Linux , when JTAG connection is established on Vivado HW Manager.	Do not use HW Manager connection, or if debugging is necessary: <ol style="list-style-type: none"> <li>1. Boot linux with usb terminal</li> <li>2. From the terminal: root root mount ifconfig eth0</li> <li>3. Open two new SSH terminals via ethernet: root root , run user application ...</li> <li>4. Exit and close the usb terminal</li> </ol>	<b>Solved</b> with 20180205 update

#### Known Issues

## Requirements

## Software

Software	Version	Note
Vitis	2022.2	needed, Vivado is included into Vitis installation
PetaLinux	2022.2	needed
SI ClockBuilder Pro	---	optional

#### Software

## Hardware

Basic description of TE Board Part Files is available on [TE Board Part Files](#).

Complete List is available on "<project folder>\board\_files\\*\_board\_files.csv"

Design supports following modules:

Module Model	Board Part Short Name	PCB Revision Support	DDR	QSPI Flash	EMMC	Others	Notes
<del>TE0807-01-07EV-ES</del>	<del>ee2_2gb</del>	<del>REV01</del>	<del>2GB</del>	<del>64MB</del>	<del>NA</del>	<del>NA</del>	<del>Not longer supported by vivado</del>
TE0807-02-07EV-1E	7ev_1e_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-07EV-1EK	7ev_1e_4gb	REV02	4GB	128MB	NA	NA	with heat sink
TE0807-02-4BE21-A	4eg_1e_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-7DE21-A	7ev_1e_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-7DI21-C	7ev_1i_4gb	REV02	4GB	128MB	NA	NA	without encryption
TE0807-02-7DI21-A	7ev_1i_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-4AI21-A	4cg_1i_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-5AI21-A	5cg_1i_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-7AI21-A	7cg_1i_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-7DI24-A	7ev_1i_4gb	REV02	4GB	512MB	NA	NA	NA
TE0807-02-7DE21-AK	7ev_1e_4gb	REV02	4GB	128MB	NA	NA	with heat sink
TE0807-02-4AI21-X	4cg_1i_4gb	REV02	4GB	128MB	NA	NA	U41 replaced with diode
TE0807-02-4BE21-AK	4eg_1e_4gb	REV02	4GB	128MB	NA	NA	with heat sink
TE0807-02-7DI21-AK	7ev_1i_4gb	REV02	4GB	128MB	NA	NA	with heat sink
TE0807-02-5DI21-A	5ev_1i_4gb	REV02	4GB	128MB	NA	NA	NA
TE0807-02-7NE21-A	7ev_3e_4gb	REV02	4GB	128MB	NA	NA	NA

TE0807-03-5DI21-A	5ev_1i_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7NE21-A	7ev_3e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-4AI21-X	4cg_1i_4gb	REV03	4GB	128MB	NA	NA	U41 replaced with diode
TE0807-03-4AI21-A	4cg_1i_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-4AI21-C	4cg_1i_4gb	REV03	4GB	128MB	NA	NA	without encryption
TE0807-03-4BE21-A	4eg_1e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-5AI21-A	5cg_1i_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7AI21-A	7cg_1i_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7DE21-A*	7ev_1e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7DE21-AK	7ev_1e_4gb	REV03	4GB	128MB	NA	NA	with heat sink
TE0807-03-7DI21-A	7ev_1i_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7DI21-C	7ev_1i_4gb	REV03	4GB	128MB	NA	NA	without encryption
TE0807-03-7DI24-A	7ev_1i_4gb	REV03	4GB	512MB	NA	NA	NA
TE0807-03-4BE21-AK	4eg_1e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-S004	7ev_1e_me_8gb	REV03	8GB	128MB	NA	NA	CAO
TE0807-03-S005	7ev_1i_4gb	REV03	4GB	512MB	NA	NA	CAO
TE0807-03-S008	7ev_1i_me_8gb	REV03	8GB	128MB	NA	without PLL	CAO Micron DDR
TE0807-03-S014	4eg_1e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-7DE21-AZ	7ev_1e_4gb	REV03	4GB	128MB	NA	NA	NA
TE0807-03-S011	7ev_1i_me_8gb	REV03	8GB	128MB	NA	without PLL	CAO Micron DDR

\*used as reference

#### Hardware Modules

Note: Design contains also Board Part Files for TE0807 only configuration, this board part files are not used for this reference design.

Design supports following carriers:

Carrier Model	Notes
TEBF0808*	Used as reference carrier. <b>Important:</b> CPLD Firmware REV07 or newer is recommended

\*used as reference

#### Hardware Carrier

Additional HW Requirements:

Additional Hardware	Notes
Display Port Monitor	Optional HW Not all monitors are supported, also Adapter to other Standard can make trouble. Design was testet with <b>DELL U2412M</b>
USB Keyboard	Optional HW Can be used to get access to console which is show on Display Port
USB Stick	Optional HW USB was tested with USB memory stick
SATA Disk	Optional HW
PCIe Card	Optional HW
ETH cable	Optional HW Ethernet works with DHCP, but can be setup also manually
SD card	with fat32 partition

\*used as reference

#### Additional Hardware

## Content

For general structure and usage of the reference design, see [Project Delivery - AMD devices](#)

## Design Sources

Type	Location	Notes
Vivado	<project folder>\block_design <project folder>\constraints <project folder>\ip_lib <project folder>\board_files	Vivado Project will be generated by TE Scripts
Vitis	<project folder>\sw_lib	Additional Software Template for Vitis and apps_list.csv with settings automatically for Vitis app generation
PetaLinux	<project folder>\os\petalinux	PetaLinux template with current configuration

#### Design sources

## Additional Sources

Type	Location	Notes
------	----------	-------

SI5345	<project folder>\misc\PLL\SI5345_B	SI5345 Project with current PLL Configuration
init.sh	<project folder>\misc\sd	Additional initialization script for Linux

#### Additional design sources

## Prebuilt

File	File-Extension	Description
BIF-File	*.bif	File with description to generate Bin-File
BIN-File	*.bin	Flash Configuration File with Boot-Image (Zynq-FPGAs)
BIT-File	*.bit	FPGA (PL Part) Configuration File
Boot Script-File	*.scr	Distro Boot Script file
DebugProbes-File	*.ltx	Definition File for Vivado/Vivado Labtools Debugging Interface
Diverse Reports	---	Report files in different formats
Device Tree	*.dts	Device tree (2 possible, one for u-boot and one for linux)
Hardware-Platform-Description-File	*.xsa	Exported Vivado <a href="#">hardware description file</a> for Vitis and PetaLinux
LabTools Project-File	*.lpr	Vivado Labtools Project File
OS-Image	*.ub	Image with Linux Kernel (On Petalinux optional with Devicetree and RAM-Disk)
Software-Application-File	*.elf	Software Application for Zynq or MicroBlaze Processor Systems

#### Prebuilt files (only on ZIP with prebuilt content)

## Download

Reference Design is only usable with the specified Vivado/Vitis/PetaLinux version. Do never use different Versions of Xilinx Software for the same Project.

Reference Design is available on:

- [TE0807 "StarterKit" Reference Design](#)

## Design Flow



Reference Design is available with and without prebuilt files. It's recommended to use TE prebuilt files for first launch.

Trenz Electronic provides a tcl based built environment based on Xilinx Design Flow.



See also:

- [AMD Development Tools#XilinxSoftware-BasicUserGuides](#)
- [Vivado Projects - TE Reference Design](#)
- [Project Delivery](#).

The Trenz Electronic FPGA Reference Designs are TCL-script based project. Command files for execution will be generated with "\_create\_win\_setup.cmd" on Windows OS and "\_create\_linux\_setup.sh" on Linux OS.

TE Scripts are only needed to generate the vivado project, all other additional steps are optional and can also executed by Xilinx Vivado/Vitis GUI. For currently Scripts limitations on Win and Linux OS see: [Project Delivery Currently limitations of functionality](#)



**Caution!** Win OS has a 260 character limit for path lengths which can affect the Vivado tools. To avoid this issue, use Virtual Drive or the shortest possible names and directory locations for the reference design (for example "x:\<project folder>")

1. Run \_create\_win\_setup.cmd/\_create\_linux\_setup.sh and follow instructions on shell:

#### **\_create\_win\_setup.cmd/\_create\_linux\_setup.sh**

```
-----Set design paths-----
-- Run Design with: _create_win_setup
-- Use Design Path: <absolute project path>
-----
-----TE Reference
Design-----
-----
-- (0)  Module selection guide, project creation...prebuilt export...
-- (1)  Create minimum setup of CMD-Files and exit Batch
-- (2)  Create maximum setup of CMD-Files and exit Batch
-- (3)  (internal only) Dev
-- (4)  (internal only) Prod
-- (c)  Go to CMD-File Generation (Manual setup)
-- (d)  Go to Documentation (Web Documentation)
-- (g)  Install Board Files from Xilinx Board Store (beta)
-- (a)  Start design with unsupported Vivado Version (beta)
-- (x)  Exit Batch (nothing is done!)
-----
Select (ex.: '0' for module selection guide):
```

2. Press 0 and enter to start "Module Selection Guide"
3. Create project and follow instructions of the product selection guide, settings file will be configured automatically during this process.
  - optional for manual changes: Select correct device and Xilinx install path on "design\_basic\_settings.cmd" and create Vivado project with "vivado\_create\_project\_gui mode.cmd"




Note: Select correct one, see also [Vivado Board Part Flow](#)

**Important:** Use Board Part Files, which ends with \*\_tebf0808

4. Create hardware description file (.xsa file) for PetaLinux project and export to prebuilt folder

**run on Vivado TCL (Script generates design and export files into "<project folder>\prebuilt\hardware\<short name>")**


```
TE::hw_build_design -export_prebuilt
```

 Using Vivado GUI is the same, except file export to prebuilt folder.

5. Create and configure your PetaLinux project with exported .xsa-file, see [PetaLinux KICKstart](#)
  - use TE Template from "<project folder>\os\petalinux"
  - use exported .xsa file from "<project folder>\prebuilt\hardware\<short name>". **Note:** HW Export from Vivado GUI creates another path as default workspace.
  - The build images are located in the "<plnx-proj-root>/images/linux" directory
6. Configure the **boot.scr** file as needed, see [Distro Boot with Boot.scr](#)
7. Generate Programming Files with Vitis
  - a. Copy PetaLinux build image files to prebuilt folder
    - copy **u-boot.elf**, **system.dtb**, **bl31.elf**, **image.ub** and **boot.scr** from "<plnx-proj-root>/images/linux" to prebuilt folder
  - b. Generate Programming Files

**run on Vivado TCL (Script generates applications and bootable files, which are defined in "test\_boardsw\_libapps\_list.csv")**

```
TE::sw_run_vitis -all
TE::sw_run_vitis (optional; Start Vitis from Vivado GUI or
start with TE Scripts on Vivado TCL)
```

 TCL scripts generate also platform project, this must be done manually in case GUI is used. See [Vitis](#)

8. Generate Programming Files with Petalinux (alternative), see [PetaLinux KICKstart](#)

## Launch

For basic board setup, LEDs... see: [TEBF0808 Getting Started](#)

## Programming


 Check Module and Carrier TRMs for proper HW configuration before you try any design.

Xilinx documentation for programming and debugging: [Vivado/Vitis/SDSoC-Xilinx Software Programming and Debugging](#)

## Get prebuilt boot binaries

1. Run `_create_win_setup.cmd/_create_linux_setup.sh` and follow instructions on shell
2. Press 0 and enter to start "Module Selection Guide"
  - a. Select assembly version
  - b. Validate selection

- c. Select create and open delivery binary folder

 Note: Folder "<project folder>\\_binaries\_<Article Name>" with subfolder "boot\_<app name>" for different applications will be generated

## QSPI-Boot mode

Option for **Boot.bin** on QSPI Flash.

1. Connect **JTAG** and power on carrier with module
2. Open Vivado Project with "vivado\_open\_existing\_project\_gui mode.cmd" or if not created, create with "vivado\_create\_project\_gui mode.cmd"

run on Vivado TCL (Script programs **BOOT.bin** on QSPI flash)

```
TE::pr_program_flash -swapp hello_te0807
```

3. Set Boot Mode to **QSPI-Boot**
  - Depends on Carrier, see carrier TRM.
  - TEBF0808 change automatically the Boot Mode to SD, if SD is inserted, optional CPLD Firmware without Boot Mode changing for microSD Slot is available on the download area

## SD-Boot mode


1. Copy **image.ub**, **boot.scr** and **Boot.bin** on **SD**
  - use files from "<project folder>\\_binaries\_<Article Name>\boot\_linux" from generated binary folder, see: [Get prebuilt boot binaries](#)
  - or use prebuilt file location, see "<project folder>\prebuilt\file\_location.txt"
2. Set Boot Mode to SD-Boot.
  - Depends on Carrier, see carrier TRM.
3. Insert SD-Card in SD-Slot.


## JTAG

Not used on this Example.

## Usage

1. Prepare HW like described on section [Programming](#)
2. Connect UART USB (most cases same as JTAG)
3. Select SD Card as Boot Mode (or QSPI - depending on step 1)

 Note: See TRM of the Carrier, which is used.


 Starting with Petalinux version 2020.1, the industry standard "Distro-Boot" boot flow for U-Boot was introduced, which significantly expands the possibilities of the boot process and has the primary goal of making booting much more standardised and predictable.  
The boot options described above describe the common boot processes for this hardware; other boot options are possible.  
For more information see [Distro Boot with Boot.scr](#)

4. (Optional with TEBF0808) Insert PCIe Card (detection depends on Linux driver. Only some basic drivers are installed)
5. (Optional with TEBF0808) Connect SATA Disc
6. (Optional with TEBF0808) Connect Display Port Monitor (List of usable Monitors: <https://www.xilinx.com/support/answers/68671.html>)
7. (Optional with TEBF0808) Connect Network Cable
8. Power On PCB

1. ZynqMP Boot ROM loads FSBL from SD/QSPI into OCM,
2. FSBL init the PS, programs the PL using the bitstream and loads PMU, ATF and U-boot from SD/QSPI into DDR,
3. U-boot loads Linux (**image.ub**) from SD/QSPI/... into DDR


## Linux

1. Open Serial Console (e.g. putty)
  - Speed: 115200
  - select COM Port

 Win OS, see device manager, Linux OS see dmesg |grep tty (UART is \*USB1)

2. Linux Console:

```
# password disabled
petalinux login: root
Password: root
```

 Note: Wait until Linux boot finished

3. You can use Linux shell now.

```
i2cdetect -y -r 0          (check I2C 0 Bus, replace 0 with other bus
number is also possible)
dmesg | grep rtc           (RTC check)
udhcpd                    (ETH0 check)
lsusb                     (USB check)
lspci                     (PCIe check)
```

4. Option Features

- Webserver to get access to ZynqMP
  - insert IP on web browser to start web interface
- init.sh scripts
  - add init.sh script on SD, content will be load automatically on startup (template included in "<project folder>\misc\SD")

## Vivado Hardware Manager

Open Vivado HW-Manager and add VIO signal to dashboard (\*.ltx located on prebuilt folder).

- RGPIO Interface (**Important:** CPLD Firmware REV07 or newer is needed) for Control and Monitoring:
  - Set Enable to send Write data over RGPIO interface.

- Important use CPLD Firmware REV07 or newer: <https://wiki.trenz-electronic.de/display/PD/TEBF0808+CPLD>
  - Buttons, LEDs, Status...


- Control:
  - LEDs: XMOD 2(without green dot) and HD LED are accessible.
  - CAN\_S

The screenshot shows the Vivado Hardware Manager interface. The left pane displays a tree view of hardware components, including various GPIOs and I/Os. The right pane shows a table of hardware components with columns for Name, Value, Activity, Direction, and VIO. The table lists components like `zsys_URGPIOMio_rgpio_s_enable`, `zsys_URGPIOMio_rgpio_s_23d12_P0[11:0]`, `zsys_URGPIOMio_rgpio_s_23d12_unused[15:0]`, `zsys_URGPIOMio_rgpio_s_11d18_bootmode[3:0]`, `zsys_URGPIOMio_rgpio_s_7d18_ERST[1:0]`, `zsys_URGPIOMio_rgpio_s_7d18_data[7:0]`, `zsys_URGPIOMio_rgpio_s_5d15_CD[1:0]`, `zsys_URGPIOMio_rgpio_s_3_unused`, `zsys_URGPIOMio_rgpio_s_2_xmod1_button`, `zsys_URGPIOMio_rgpio_s_1_S5_2_bootmode`, `zsys_URGPIOMio_rgpio_s_0_S5_1_bootmode`, `zsys_URGPIOMio_rgpio_m_enable`, `zsys_URGPIOMio_rgpio_m_23d12_unused[11:0]`, `zsys_URGPIOMio_rgpio_m_23_PJTAG_SRST`, `zsys_URGPIOMio_rgpio_m_22_PJTAG_TRST`, `zsys_URGPIOMio_rgpio_m_21_FMC_CLKDIR`, `zsys_URGPIOMio_rgpio_m_20_SD_WP`, `zsys_URGPIOMio_rgpio_m_19_reserved`, `zsys_URGPIOMio_rgpio_m_18_S5_4_FMCVADJ`, `zsys_URGPIOMio_rgpio_m_17_S5_3_USER`, `zsys_URGPIOMio_rgpio_m_16_XMOD2BUTTON`, `zsys_URGPIOMio_rgpio_m_15d13_PHY_LEDS[2:0]`, `zsys_URGPIOMio_rgpio_m_12_CAN_FAULT`, `zsys_URGPIOMio_rgpio_m_11d18_muxsel[3:0]`, `zsys_URGPIOMio_rgpio_m_11d18_MUX[3:0]`, `zsys_URGPIOMio_rgpio_m_7d18_unused[1:0]`, `zsys_URGPIOMio_rgpio_m_7d18_data[7:0]`, and `zsys_URGPIOMio_rgpio_m_5d10_leds[5:0]`.

Vivado Hardware Manager

## System Design - Vivado

## Block Design

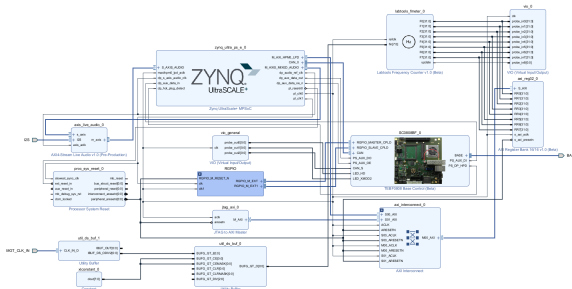

Block Design

## PS Interfaces

Activated interfaces:

Type	Note
DDR	
QSPI	MIO
SD0	MIO
SD1	MIO
CAN0	EMIO
I2C0	MIO
PJTAG0	MIO
UART0	MIO
GPIO0	MIO
SWDT0..1	
TTC0..3	
GEM3	MIO
USB0	MIO/GTP
PCIe	MIO/GTP
SATA	GTP
DisplayPort	EMIO/GTP

#### PS Interfaces

## Constrains

### Basic module constrains

#### `_i_bitgen.xdc`

```
set_property BITSTREAM.GENERAL.COMPRESS TRUE [current_design]
set_property BITSTREAM.CONFIG.UNUSEDPIN PULLNONE [current_design]
```

### Design specific constrain

#### `_i_io.xdc`

```
#System Controller IP

#J3:31 LED_HD
set_property PACKAGE_PIN K11 [get_ports BASE_sc0]
#J3:41
set_property PACKAGE_PIN E14 [get_ports BASE_sc5]
#J3:45
```

```

set_property PACKAGE_PIN C12 [get_ports BASE_sc6]
#J3:47
set_property PACKAGE_PIN D12 [get_ports BASE_sc7]
#J3:32
set_property PACKAGE_PIN J12 [get_ports BASE_sc10_io]
#J3:34
set_property PACKAGE_PIN K13 [get_ports BASE_sc11]
#J3:36
set_property PACKAGE_PIN A13 [get_ports BASE_sc12]
#J3:38
set_property PACKAGE_PIN A14 [get_ports BASE_sc13]
#J3:40
set_property PACKAGE_PIN E12 [get_ports BASE_sc14]
#J3:42
set_property PACKAGE_PIN F12 [get_ports BASE_sc15]
#J3:46 CAN S
set_property PACKAGE_PIN A12 [get_ports BASE_sc16]
#J3:48 LED_XMOD
set_property PACKAGE_PIN B12 [get_ports BASE_sc17]
#J3:50 CAN TX
set_property PACKAGE_PIN B14 [get_ports BASE_sc18]
#J3:52 CAN RX
set_property PACKAGE_PIN C14 [get_ports BASE_sc19]

set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc0]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc5]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc6]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc7]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc10_io]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc11]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc12]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc13]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc14]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc15]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc16]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc17]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc18]
set_property IOSTANDARD LVCMOS18 [get_ports BASE_sc19]

# PLL
#J4:74
#set_property PACKAGE_PIN AF15 [get_ports {si570_clk_p[0]}]
#set_property IOSTANDARD LVDS [get_ports {si570_clk_p[0]}]
#set_property IOSTANDARD LVDS [get_ports {si570_clk_n[0]}]

# Audio Codec
#LRCLK                J3:49 B47_L9_N
#BCLK                 J3:51 B47_L9_P
#DAC_SDATA            J3:53 B47_L7_N
#ADC_SDATA            J3:55 B47_L7_P
set_property PACKAGE_PIN G14 [get_ports I2S_lrclk ]
set_property PACKAGE_PIN H14 [get_ports I2S_bclk ]
set_property PACKAGE_PIN C13 [get_ports I2S_sdin ]
set_property PACKAGE_PIN D14 [get_ports I2S_s dout ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_lrclk ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_bclk ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_sdin ]
set_property IOSTANDARD LVCMOS18 [get_ports I2S_s dout ]

```

```

# MGTs
# R8 MGT_224_CLK0_P -> B2B,J3-62 -> TEBF0808-04a_FMC_J5E-D5
# R7 MGT_224_CLK0_N -> B2B,J3-60 -> TEBF0808-04a_FMC_J5E-D4
# N8 MGT_224_CLK1_P -> U5,38 -> Si5345 -> out4
# N7 MGT_224_CLK1_N -> U5,37 -> Si5345 -> out4

# L8 MGT_225_CLK0_P -> B2B,J3-67 -> TEBF0808-04a_FMC_J5E-B21
# L7 MGT_225_CLK0_N -> B2B,J3-65 -> TEBF0808-04a_FMC_J5E-B20
# J8 MGT_225_CLK1_P -> U5,35 -> Si5345 -> out3
# J7 MGT_225_CLK1_N -> U5,34 -> Si5345 -> out3

# H10 MGT_226_CLK0_P -> U5,31 -> Si5345 -> out2
# H9 MGT_226_CLK0_N -> U5,30 -> Si5345 -> out2
# F10 MGT_226_CLK1_P -> B2B,J3-61 -> TEBF0808-04a_B230_CLK_P/CLK7_P ->
B2B,J2-13 -> U5,51 -> Si5345 -> out7
# F9 MGT_226_CLK1_N -> B2B,J3-59 -> TEBF0808-04a_B230_CLK_N/CLK7_N ->
B2B,J2-15 -> U5,50 -> Si5345 -> out7

# D10 MGT_227_CLK0_P -> U5,28 -> Si5345 -> out1
# D9 MGT_227_CLK0_N -> U5,27 -> Si5345 -> out1
# B10 MGT_227_CLK1_P -> B2B,J2-22 -> floating
# B9 MGT_227_CLK1_N -> B2B,J2-24 -> floating

set_property PACKAGE_PIN R8 [get_ports {MGT_CLK_IN_clk_p[0]}]
set_property PACKAGE_PIN N8 [get_ports {MGT_CLK_IN_clk_p[1]}]
set_property PACKAGE_PIN L8 [get_ports {MGT_CLK_IN_clk_p[2]}]
set_property PACKAGE_PIN J8 [get_ports {MGT_CLK_IN_clk_p[3]}]
set_property PACKAGE_PIN H10 [get_ports {MGT_CLK_IN_clk_p[4]}]
set_property PACKAGE_PIN F10 [get_ports {MGT_CLK_IN_clk_p[5]}]
set_property PACKAGE_PIN D10 [get_ports {MGT_CLK_IN_clk_p[6]}]
set_property PACKAGE_PIN B10 [get_ports {MGT_CLK_IN_clk_p[7]}]

# MGTs
# R8 MGT_224_CLK0_P -> B2B,J3-B27 -> TEBF0818-01_FMC_J5E-D5
# R7 MGT_224_CLK0_N -> B2B,J3-B26 -> TEBF0818-01_FMC_J5E-D4
# N8 MGT_224_CLK1_P -> U5,38 -> Si5345 -> out4
# N7 MGT_224_CLK1_N -> U5,37 -> Si5345 -> out4

# L8 MGT_225_CLK0_P -> B2B,J3-C26 -> TEBF0818-01_FMC_J5E-B21
# L7 MGT_225_CLK0_N -> B2B,J3-C25 -> TEBF0818-01_FMC_J5E-B20
# J8 MGT_225_CLK1_P -> U5,35 -> Si5345 -> out3
# J7 MGT_225_CLK1_N -> U5,34 -> Si5345 -> out3

# H10 MGT_226_CLK0_P -> U5,31 -> Si5345 -> out2
# H9 MGT_226_CLK0_N -> U5,30 -> Si5345 -> out2
# F10 MGT_226_CLK1_P -> B2B,J3-D27 -> TEBF0818-01_CLK7_P -> B2B,J2-D5 -
> U5,51 -> Si5345 -> out7
# F9 MGT_226_CLK1_N -> B2B,J3-D26 -> TEBF0818-01_CLK7_N -> B2B,J2-D6 -
> U5,50 -> Si5345 -> out7

# D10 MGT_227_CLK0_P -> U5,28 -> Si5345 -> out1
# D9 MGT_227_CLK0_N -> U5,27 -> Si5345 -> out1
# B10 MGT_227_CLK1_P -> B2B,J2-A6 -> floating
# B9 MGT_227_CLK1_N -> B2B,J2-A7 -> floating

```



For Vitis project creation, follow instructions from:

[Vitis](#)

## Application

Template location: "<project folder>\sw\_lib\sw\_apps\"

## zynqmp\_fsbl

TE modified 2022.2 FSBL

General:

- Modified Files: xfsbl\_main.c, xfsbl\_hooks.h/.c, xfsbl\_board.h/.c (search for 'TE Mod' on source code)
- Add Files: te\_xfsbl\_hooks.h/.c (for hooks and board)
- General Changes:
  - Display FSBL Banner and Device Name

Module Specific:

- Add Files: all TE Files start with te\_ \*
  - Si5345 Configuration
  - OTG+PCIe Reset over MIO
  - I2C MUX for EEPROM MAC

## zynqmp\_pmufw

Xilinx default PMU firmware.

## hello\_te0807

Hello TE0807 is a Xilinx Hello World example as endless loop instead of one console output.

## u-boot

U-Boot.elf is generated with PetaLinux. Vitis is used to generate Boot.bin.

## Software Design - PetaLinux

---

For PetaLinux installation and project creation, follow instructions from:

- [PetaLinux KICKstart](#)

## Config

Start with **petalinux-config** or **petalinux-config --get-hw-description**

Changes:

- select SD default instead of eMMC:
  - CONFIG\_SUBSYSTEM\_PRIMARY\_SD\_PSU\_SD\_1\_SELECT=y
- add new flash partition for bootscr and sizing
  - CONFIG\_SUBSYSTEM\_FLASH\_PSU\_QSPI\_0\_BANKLESS\_PART0\_SIZE=0xA00000
  - CONFIG\_SUBSYSTEM\_FLASH\_PSU\_QSPI\_0\_BANKLESS\_PART1\_SIZE=0x2000000
  - CONFIG\_SUBSYSTEM\_FLASH\_PSU\_QSPI\_0\_BANKLESS\_PART2\_SIZE=0x40000

- CONFIG\_SUBSYSTEM\_FLASH\_PSU\_QSPI\_0\_BANKLESS\_PART3\_NAME="bootscr"
  - CONFIG\_SUBSYSTEM\_FLASH\_PSU\_QSPI\_0\_BANKLESS\_PART3\_SIZE=0x80000
- Identification
  - CONFIG\_SUBSYSTEM\_HOSTNAME="Trenz"
  - CONFIG\_SUBSYSTEM\_PRODUCT="TE0807\_TEBF0808"

## U-Boot

Start with **petalinux-config -c u-boot**

Changes:

- MAC from eeprom together with uboot and device tree settings:
  - CONFIG\_ENV\_OVERWRITE=y
  - CONFIG\_ZYNQ\_MAC\_IN\_EEPROM is not set
  - CONFIG\_NET\_RANDOM\_ETHADDR is not set
- Boot Modes:
  - CONFIG\_QSPI\_BOOT=y
  - CONFIG\_SD\_BOOT=y
  - CONFIG\_ENV\_IS\_IN\_FAT is not set
  - CONFIG\_ENV\_IS\_IN\_NAND is not set
  - CONFIG\_ENV\_IS\_IN\_SPI\_FLASH is not set
  - CONFIG\_SYS\_REDUNDAND\_ENVIRONMENT is not set
  - CONFIG\_BOOT\_SCRIPT\_OFFSET=0x2A40000
- Identification
  - CONFIG\_IDENT\_STRING=" TE0807\_TEBF0808"

Change platform-top.h:

```
#no changes
```

## Device Tree

**project-spec\meta-user\recipes-bsp\device-tree\files\system-user.dtsi**

```
/include/ "system-conf.dtsi"

/*----- gtr -----*/

//https://xilinx-wiki.atlassian.net/wiki/spaces/A/pages/18841716
//Zynq+Ultrascale+MPSOC+Linux+SIOU+driver

/ {
    refclk3:psgtr_dp_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <27000000>;
    };

    refclk2:psgtr_pcie_usb_clock {
        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <100000000>;
    };

    refclk1:psgtr_sata_clock {
```

```

        compatible = "fixed-clock";
        #clock-cells = <0x00>;
        clock-frequency = <1500000000>;
    };

    //refclk0:psgtr_unused_clock {
    //     compatible = "fixed-clock";
    //     #clock-cells = <0x00>;
    //     clock-frequency = <1000000000>;
    //};
};

&psgtr {
    clocks = <&refclk1 &refclk2 &refclk3>;
    /* ref clk instances used per lane */
    clock-names = "ref1\0ref2\0ref3";
};

/*----- SD -----*/
&sdhci0 {
    // disable-wp;
    no-1-8-v;
};

&sdhci1 {
    // disable-wp;
    no-1-8-v;
};

/*----- USB -----*/
&dwc3_0 {
    status = "okay";
    dr_mode = "host";
    snps,usb3_lpm_capable;
    snps,dis_u3_susphy_quirk;
    snps,dis_u2_susphy_quirk;
    phy-names = "usb2-phy", "usb3-phy";
    maximum-speed = "super-speed";
};

/*----- ETH PHY -----*/
&gem3 {
    /delete-property/ local-mac-address;
    phy-handle = <&phy0>;

    nvmem-cells = <&eth0_addr>;
    nvmem-cell-names = "mac-address";

    phy0: phy0@1 {
        device_type = "ethernet-phy";
        reg = <1>;
    };
};

```

```

/*----- SATA PHY -----*/
&sata {

        ceva,p0-burst-params = <0x13084a06>;
        ceva,p0-cominit-params = <0x18401828>;
        ceva,p0-comwake-params = <0x614080e>;
        ceva,p0-retry-params = <0x96a43ffc>;
        ceva,p1-burst-params = <0x13084a06>;
        ceva,p1-cominit-params = <0x18401828>;
        ceva,p1-comwake-params = <0x614080e>;
        ceva,p1-retry-params = <0x96a43ffc>;

};

/*----- QSPI -----*/
&qspi {
    #address-cells = <1>;
    #size-cells = <0>;
    status = "okay";
    flash0: flash@0 {
        compatible = "jedec,spi-nor";
        reg = <0x0>;
        #address-cells = <1>;
        #size-cells = <1>;
    };
};

/*----- I2C -----*/
&i2c0 {
    i2cswitch@73 { // u
        compatible = "nxp,pca9548";
        #address-cells = <1>;
        #size-cells = <0>;
        reg = <0x73>;
        i2c-mux-idle-disconnect;
        i2c@0 { // MCLK TEBF0808 SI5338A, 570FBB000290DG_unassembled
            reg = <0>;
        };
        i2c@1 { // SFP TEBF0808 PCF8574DWR
            reg = <1>;
        };
        i2c@2 { // PCIE
            reg = <2>;
        };
        i2c@3 { // SFP1 TEBF0808
            reg = <3>;
        };
        i2c@4 { // SFP2 TEBF0808
            reg = <4>;
        };
        i2c@5 { // TEBF0808 EEPROM
            reg = <5>;
            eeprom: eeprom@50 {
                compatible = "microchip,24aa025", "atmel,24c02";
                reg = <0x50>;

                #address-cells = <1>;
                #size-cells = <1>;
                eth0_addr: eth-mac-addr@FA {

```



- CONFIG\_NVME\_CORE=y
- CONFIG\_BLK\_DEV\_NVME=y
- # CONFIG\_NVME\_MULTIPATH is not set
- # CONFIG\_NVME\_HWMON is not set
- # CONFIG\_NVME\_TCP is not set
- CONFIG\_NVME\_TARGET=y
- # CONFIG\_NVME\_TARGET\_PASSTHRU is not set
- # CONFIG\_NVME\_TARGET\_LOOP is not set
- # CONFIG\_NVME\_TARGET\_FC is not set
- # CONFIG\_NVME\_TARGET\_TCP is not set
- CONFIG\_SATA\_AHCI=y
- CONFIG\_SATA\_MOBILE\_LPM\_POLICY=0

## Rootfs

Start with **petalinux-config -c rootfs**

Changes:

- For web server app:
  - CONFIG\_busybox-httpd=y
- For additional test tools only:
  - CONFIG\_i2c-tools=y
  - CONFIG\_packagegroup-petalinux-utils=y (util-linux, cpufrequtils, bridge-utils, mtd-utils, usbutils, pciutils, canutils, i2c-tools, smartmontools, e2fsprogs)
- For auto login:
  - CONFIG\_auto-login=y
  - CONFIG\_ADD\_EXTRA\_USERS="root:root;petalinux:;"

## FSBL patch (alternative for vitis fsbl trenz patch)

See "<project folder>\os\petalinux\project-spec\meta-user\recipes-bsp\embeddedsw"



te\_ \* files are identical to files in "<project folder>\sw\_lib\sw\_apps\zynqmp\_fsbl\src" except for the PLL files (SI5345) which depend on PLL revision. The PLL files may have to be copied again manually into the appropriate petalinux folder "<project folder>\os\petalinux\project-spec\meta-user\recipes-bsp\embeddedsw\fsbl-firmware\git\lib\sw\_apps\zynqmp\_fsbl\src"

## Applications

See "<project folder>\os\petalinux\project-spec\meta-user\recipes-apps\"

### startup

Script App to load init.sh from SD Card if available.

### webfwu

Webserver application suitable for ZynqMP access. Need busybox-httpd

## Additional Software

---

## SI5345

File location "<project folder>\misc\PLL\SI5345\_B\SI5345-\*.slabtimeproj"

General documentation how you work with these project will be available on [SI5345](#)

## Appx. A: Change History and Legal Notices

### Document Change History

To get content of older revision go to "Change History" of this page and select older document revision number.

Date	Document Revision	Authors	Description
<div>Error rendering macro 'page-info'  Ambiguous method overloading for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPermission . Cannot resolve which method</div>	<div>Error rendering macro 'page-info'  Ambiguous method overloading for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPermission . Cannot resolve which method</div>	<div>Error rendering macro 'page-info'  Ambiguous method overloading for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPermission . Cannot resolve which method</div>	<div><ul style="list-style-type: none"><li>2022.2 update</li><li>new assembly variants</li></ul></div>

to  
invoke  
for [null,  
class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen  
ce.  
pages.  
Page]  
due to  
overlapp  
ing  
prototyp  
es  
between  
:  
[interfac  
e com.  
atlassian  
.  
confluen  
ce.user.  
Conflue  
nceUser  
, class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen

to  
invoke  
for [null,  
class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen  
ce.  
pages.  
Page]  
due to  
overlapp  
ing  
prototyp  
es  
between  
:  
[interfac  
e com.  
atlassian  
.  
confluen  
ce.user.  
Conflue  
nceUser  
, class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen

to  
invoke  
for [null,  
class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen  
ce.  
pages.  
Page]  
due to  
overlapp  
ing  
prototyp  
es  
between  
:  
[interfac  
e com.  
atlassian  
.  
confluen  
ce.user.  
Conflue  
nceUser  
, class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen



ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	
2022-10-17	v.27	Manuela Strücker	<ul style="list-style-type: none"> <li>script update</li> </ul>
2022-09-12	v.26	Manuela Strücker	<ul style="list-style-type: none"> <li>update board part files compatible to Vivado 2021.2.1</li> </ul>
2022-09-12	v.25	Manuela Strücker	<ul style="list-style-type: none"> <li>2021.2 update</li> <li>new assembly variants</li> <li>update document style</li> </ul>
2021-05-11	v.23	Martin Rohrmüller	<ul style="list-style-type: none"> <li>2020.2 release</li> <li>document style update</li> </ul>
2020-10-06	v.21	John Hartfiel	<ul style="list-style-type: none"> <li>new assembly variants</li> </ul>
2020-03-25	v.20	John Hartfiel	

			<ul style="list-style-type: none"> <li>script update</li> </ul>
2020-02-25	v.19	John Hartfiel	<ul style="list-style-type: none"> <li>Update requirement section</li> </ul>
2020-02-19	v.18	John Hartfiel	<ul style="list-style-type: none"> <li>Design update</li> </ul>
2020-01-27	v.17	John Hartfiel	<ul style="list-style-type: none"> <li>new assembly variants</li> <li>Release 2019.2</li> </ul>
2019-05-22	v.16	John Hartfiel	<ul style="list-style-type: none"> <li>Release 2018.3</li> </ul>
2019-09-04	v.13	John Hartfiel	<ul style="list-style-type: none"> <li>Release 2018.2</li> </ul>
2018-07-20	v.12	John Hartfiel	<ul style="list-style-type: none"> <li>Design update</li> </ul>
2018-04-30	v.10	John Hartfiel	<ul style="list-style-type: none"> <li>Update known issues</li> </ul>
2018-02-08	v.9	John Hartfiel	<ul style="list-style-type: none"> <li>Design update</li> </ul>
2018-01-29	v.4	John Hartfiel	<ul style="list-style-type: none"> <li>Update known issues</li> </ul>
2018-01-18	v.3	John Hartfiel	<ul style="list-style-type: none"> <li>Release 2017.4</li> </ul>
	All	<div> Error  renderi  ng  macro  'page-  info' </div> <div> Ambiguo  us  method  overload  ing for  method  jdk.  proxy24 </div>	

1.\$Proxy  
3496#ha  
sConten  
tLevelPe  
rmission  
.  
Cannot  
resolve  
which  
method  
to  
invoke  
for [null,  
class  
java.  
lang.  
String,  
class  
com.  
atlassian  
.  
confluen  
ce.  
pages.  
Page]  
due to  
overlapp  
ing  
prototyp  
es  
between  
:  
[interfac  
e com.  
atlassian  
.  
confluen  
ce.user.  
Conflue

		<div>nceUser , class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]</div>	
--	--	--	--

Document change history.

[Legal Notices](#)

[Data Privacy](#)

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

## Document Warranty

The material contained in this document is provided “as is” and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

## Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

## Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

## Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used /modified / copied only in accordance with the terms of such license.

## Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

## REACH, RoHS and WEEE

### REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of [REACH](#). The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no [SVHC \(Substances of Very High Concern\) on the Candidate List](#) are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the [European Chemicals Agency \(ECHA\)](#).

### RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

## WEEE

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

### Error rendering macro 'page-info'

Ambiguous method overloading for method jdk.

proxy241.\$Proxy3496#hasContentLevelPermission. Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due to overlapping prototypes between: [interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]