

TE0820 TRM

Table of contents

[Download PDF version of this document.](#)

- 1 Overview
 - 1.1 Key Features
 - 1.2 Block Diagram
 - 1.3 Main Components
 - 1.4 Initial Delivery State
 - 1.5 Configuration Signals

Overview

The Trenz Electronic TE0820 is a powerful 4 x 5 cm industrial/extended module integrated with a Xilinx Zynq UltraScale+ MPSoC. In addition, the module is equipped with 2x 8 Gb DDR4 SDRAM chip, up to 64 Gb eMMC chip, 2x 512 Mb flash memory for configuration and data storage, as well as powerful switching power supplies for all required voltages. The module is equipped with a Lattice Mach XO2 CPLD for system controlling. 3x Robust high-speed connectors provide a large number of inputs and outputs. Additionally the module provides Gigabit Ethernet and USB2.0 Transceivers.

The highly integrated modules are smaller than a credit card and are offered in several variants at an affordable price-performance ratio. Modules with a 4 x 5 cm form factor are completely mechanically and largely electrically compatible with each other.

All components cover at least the industrial temperature range. The temperature range in which the module can be used depends on the customer design and the selected cooling. Please contact us for special solutions.

Refer to <http://trenz.org/te0820-info> for the current online version of this manual and other available documentation.

- 4 Power and Power-on Sequence
 - 4.1 Power Supply
 - 4.2 Power Consumption
 - 4.3 Power Distribution Dependencies
 - 4.4 Power-On Sequence
 - 4.5 Power Rails

Key Features


- SoC/MPSoC
 - 1.1 Key Features
 - 1.2 Block Diagram
 - 1.3 Main Components
 - 1.4 Initial Delivery State
 - 1.5 Configuration Signals
- 5 Board to Board (B2B) I/Os
 - 5.1 Device ID
 - 5.2 Device ID 2
 - 5.3 Device ID 3
 - 5.4 Device ID 4
 - 5.5 Device ID 5
 - 5.6 Device ID 6
 - 5.7 Device ID 7
 - 5.8 Device ID 8
 - 5.9 Device ID 9
 - 5.10 Device ID 10
 - 5.11 Device ID 11
 - 5.12 Device ID 12
 - 5.13 Device ID 13
 - 5.14 Device ID 14
 - 5.15 Device ID 15
 - 5.16 Device ID 16
 - 5.17 Device ID 17
 - 5.18 Device ID 18
 - 5.19 Device ID 19
 - 5.20 Device ID 20
 - 5.21 Device ID 21
 - 5.22 Device ID 22
 - 5.23 Device ID 23
 - 5.24 Device ID 24
 - 5.25 Device ID 25
 - 5.26 Device ID 26
 - 5.27 Device ID 27
 - 5.28 Device ID 28
 - 5.29 Device ID 29
 - 5.30 Device ID 30
 - 5.31 Device ID 31
 - 5.32 Device ID 32
 - 5.33 Device ID 33
 - 5.34 Device ID 34
 - 5.35 Device ID 35
 - 5.36 Device ID 36
 - 5.37 Device ID 37
 - 5.38 Device ID 38
 - 5.39 Device ID 39
 - 5.40 Device ID 40
 - 5.41 Device ID 41
 - 5.42 Device ID 42
 - 5.43 Device ID 43
 - 5.44 Device ID 44
 - 5.45 Device ID 45
 - 5.46 Device ID 46
 - 5.47 Device ID 47
 - 5.48 Device ID 48
 - 5.49 Device ID 49
 - 5.50 Device ID 50
 - 5.51 Device ID 51
 - 5.52 Device ID 52
 - 5.53 Device ID 53
 - 5.54 Device ID 54
 - 5.55 Device ID 55
 - 5.56 Device ID 56
 - 5.57 Device ID 57
 - 5.58 Device ID 58
 - 5.59 Device ID 59
 - 5.60 Device ID 60
 - 5.61 Device ID 61
 - 5.62 Device ID 62
 - 5.63 Device ID 63
 - 5.64 Device ID 64
 - 5.65 Device ID 65
 - 5.66 Device ID 66
 - 5.67 Device ID 67
 - 5.68 Device ID 68
 - 5.69 Device ID 69
 - 5.70 Device ID 70
 - 5.71 Device ID 71
 - 5.72 Device ID 72
 - 5.73 Device ID 73
 - 5.74 Device ID 74
 - 5.75 Device ID 75
 - 5.76 Device ID 76
 - 5.77 Device ID 77
 - 5.78 Device ID 78
 - 5.79 Device ID 79
 - 5.80 Device ID 80
 - 5.81 Device ID 81
 - 5.82 Device ID 82
 - 5.83 Device ID 83
 - 5.84 Device ID 84
 - 5.85 Device ID 85
 - 5.86 Device ID 86
 - 5.87 Device ID 87
 - 5.88 Device ID 88
 - 5.89 Device ID 89
 - 5.90 Device ID 90
 - 5.91 Device ID 91
 - 5.92 Device ID 92
 - 5.93 Device ID 93
 - 5.94 Device ID 94
 - 5.95 Device ID 95
 - 5.96 Device ID 96
 - 5.97 Device ID 97
 - 5.98 Device ID 98
 - 5.99 Device ID 99
 - 600 Device ID 100
 - 601 Device ID 101
 - 602 Device ID 102
 - 603 Device ID 103
 - 604 Device ID 104
 - 605 Device ID 105
 - 606 Device ID 106
 - 607 Device ID 107
 - 608 Device ID 108
 - 609 Device ID 109
 - 610 Device ID 110
 - 611 Device ID 111
 - 612 Device ID 112
 - 613 Device ID 113
 - 614 Device ID 114
 - 615 Device ID 115
 - 616 Device ID 116
 - 617 Device ID 117
 - 618 Device ID 118
 - 619 Device ID 119
 - 620 Device ID 120
 - 621 Device ID 121
 - 622 Device ID 122
 - 623 Device ID 123
 - 624 Device ID 124
 - 625 Device ID 125
 - 626 Device ID 126
 - 627 Device ID 127
 - 628 Device ID 128
 - 629 Device ID 129
 - 630 Device ID 130
 - 631 Device ID 131
 - 632 Device ID 132
 - 633 Device ID 133
 - 634 Device ID 134
 - 635 Device ID 135
 - 636 Device ID 136
 - 637 Device ID 137
 - 638 Device ID 138
 - 639 Device ID 139
 - 640 Device ID 140
 - 641 Device ID 141
 - 642 Device ID 142
 - 643 Device ID 143
 - 644 Device ID 144
 - 645 Device ID 145
 - 646 Device ID 146
 - 647 Device ID 147
 - 648 Device ID 148
 - 649 Device ID 149
 - 650 Device ID 150
 - 651 Device ID 151
 - 652 Device ID 152
 - 653 Device ID 153
 - 654 Device ID 154
 - 655 Device ID 155
 - 656 Device ID 156
 - 657 Device ID 157
 - 658 Device ID 158
 - 659 Device ID 159
 - 660 Device ID 160
 - 661 Device ID 161
 - 662 Device ID 162
 - 663 Device ID 163
 - 664 Device ID 164
 - 665 Device ID 165
 - 666 Device ID 166
 - 667 Device ID 167
 - 668 Device ID 168
 - 669 Device ID 169
 - 670 Device ID 170
 - 671 Device ID 171
 - 672 Device ID 172
 - 673 Device ID 173
 - 674 Device ID 174
 - 675 Device ID 175
 - 676 Device ID 176
 - 677 Device ID 177
 - 678 Device ID 178
 - 679 Device ID 179
 - 680 Device ID 180
 - 681 Device ID 181
 - 682 Device ID 182
 - 683 Device ID 183
 - 684 Device ID 184
 - 685 Device ID 185
 - 686 Device ID 186
 - 687 Device ID 187
 - 688 Device ID 188
 - 689 Device ID 189
 - 690 Device ID 190
 - 691 Device ID 191
 - 692 Device ID 192
 - 693 Device ID 193
 - 694 Device ID 194
 - 695 Device ID 195
 - 696 Device ID 196
 - 697 Device ID 197
 - 698 Device ID 198
 - 699 Device ID 199
 - 700 Device ID 200
 - 701 Device ID 201
 - 702 Device ID 202
 - 703 Device ID 203
 - 704 Device ID 204
 - 705 Device ID 205
 - 706 Device ID 206
 - 707 Device ID 207
 - 708 Device ID 208
 - 709 Device ID 209
 - 710 Device ID 210
 - 711 Device ID 211
 - 712 Device ID 212
 - 713 Device ID 213
 - 714 Device ID 214
 - 715 Device ID 215
 - 716 Device ID 216
 - 717 Device ID 217
 - 718 Device ID 218
 - 719 Device ID 219
 - 720 Device ID 220
 - 721 Device ID 221
 - 722 Device ID 222
 - 723 Device ID 223
 - 724 Device ID 224
 - 725 Device ID 225
 - 726 Device ID 226
 - 727 Device ID 227
 - 728 Device ID 228
 - 729 Device ID 229
 - 730 Device ID 230
 - 731 Device ID 231
 - 732 Device ID 232
 - 733 Device ID 233
 - 734 Device ID 234
 - 735 Device ID 235
 - 736 Device ID 236
 - 737 Device ID 237
 - 738 Device ID 238
 - 739 Device ID 239
 - 740 Device ID 240
 - 741 Device ID 241
 - 742 Device ID 242
 - 743 Device ID 243
 - 744 Device ID 244
 - 745 Device ID 245
 - 746 Device ID 246
 - 747 Device ID 247
 - 748 Device ID 248
 - 749 Device ID 249
 - 750 Device ID 250
 - 751 Device ID 251
 - 752 Device ID 252
 - 753 Device ID 253
 - 754 Device ID 254
 - 755 Device ID 255
 - 756 Device ID 256
 - 757 Device ID 257
 - 758 Device ID 258
 - 759 Device ID 259
 - 760 Device ID 260
 - 761 Device ID 261
 - 762 Device ID 262
 - 763 Device ID 263
 - 764 Device ID 264
 - 765 Device ID 265
 - 766 Device ID 266
 - 767 Device ID 267
 - 768 Device ID 268
 - 769 Device ID 269
 - 770 Device ID 270
 - 771 Device ID 271
 - 772 Device ID 272
 - 773 Device ID 273
 - 774 Device ID 274
 - 775 Device ID 275
 - 776 Device ID 276
 - 777 Device ID 277
 - 778 Device ID 278
 - 779 Device ID 279
 - 780 Device ID 280
 - 781 Device ID 281
 - 782 Device ID 282
 - 783 Device ID 283
 - 784 Device ID 284
 - 785 Device ID 285
 - 786 Device ID 286
 - 787 Device ID 287
 - 788 Device ID 288
 - 789 Device ID 289
 - 790 Device ID 290
 - 791 Device ID 291
 - 792 Device ID 292
 - 793 Device ID 293
 - 794 Device ID 294
 - 795 Device ID 295
 - 796 Device ID 296
 - 797 Device ID 297
 - 798 Device ID 298
 - 799 Device ID 299
 - 800 Device ID 300
 - 801 Device ID 301
 - 802 Device ID 302
 - 803 Device ID 303
 - 804 Device ID 304
 - 805 Device ID 305
 - 806 Device ID 306
 - 807 Device ID 307
 - 808 Device ID 308
 - 809 Device ID 309
 - 810 Device ID 310
 - 811 Device ID 311
 - 812 Device ID 312
 - 813 Device ID 313
 - 814 Device ID 314
 - 815 Device ID 315
 - 816 Device ID 316
 - 817 Device ID 317
 - 818 Device ID 318
 - 819 Device ID 319
 - 820 Device ID 320
 - 821 Device ID 321
 - 822 Device ID 322
 - 823 Device ID 323
 - 824 Device ID 324
 - 825 Device ID 325
 - 826 Device ID 326
 - 827 Device ID 327
 - 828 Device ID 328
 - 829 Device ID 329
 - 830 Device ID 330
 - 831 Device ID 331
 - 832 Device ID 332
 - 833 Device ID 333
 - 834 Device ID 334
 - 835 Device ID 335
 - 836 Device ID 336
 - 837 Device ID 337
 - 838 Device ID 338
 - 839 Device ID 339
 - 840 Device ID 340
 - 841 Device ID 341
 - 842 Device ID 342
 - 843 Device ID 343
 - 844 Device ID 344
 - 845 Device ID 345
 - 846 Device ID 346
 - 847 Device ID 347
 - 848 Device ID 348
 - 849 Device ID 349
 - 850 Device ID 350
 - 851 Device ID 351
 - 852 Device ID 352
 - 853 Device ID 353
 - 854 Device ID 354
 - 855 Device ID 355
 - 856 Device ID 356
 - 857 Device ID 357
 - 858 Device ID 358
 - 859 Device ID 359
 - 860 Device ID 360
 - 861 Device ID 361
 - 862 Device ID 362
 - 863 Device ID 363
 - 864 Device ID 364
 - 865 Device ID 365
 - 866 Device ID 366
 - 867 Device ID 367
 - 868 Device ID 368
 - 869 Device ID 369
 - 870 Device ID 370
 - 871 Device ID 371
 - 872 Device ID 372
 - 873 Device ID 373
 - 874 Device ID 374
 - 875 Device ID 375
 - 876 Device ID 376
 - 877 Device ID 377
 - 878 Device ID 378
 - 879 Device ID 379
 - 880 Device ID 380
 - 881 Device ID 381
 - 882 Device ID 382
 - 883 Device ID 383
 - 884 Device ID 384
 - 885 Device ID 385
 - 886 Device ID 386
 - 887 Device ID 387
 - 888 Device ID 388
 - 889 Device ID 389
 - 890 Device ID 390
 - 891 Device ID 391
 - 892 Device ID 392
 - 893 Device ID 393
 - 894 Device ID 394
 - 895 Device ID 395
 - 896 Device ID 396
 - 897 Device ID 397
 - 898 Device ID 398
 - 899 Device ID 399
 - 900 Device ID 400
 - 901 Device ID 401
 - 902 Device ID 402
 - 903 Device ID 403
 - 904 Device ID 404
 - 905 Device ID 405
 - 906 Device ID 406
 - 907 Device ID 407
 - 908 Device ID 408
 - 909 Device ID 409
 - 910 Device ID 410
 - 911 Device ID 411
 - 912 Device ID 412
 - 913 Device ID 413
 - 914 Device ID 414
 - 915 Device ID 415
 - 916 Device ID 416
 - 917 Device ID 417
 - 918 Device ID 418
 - 919 Device ID 419
 - 920 Device ID 420
 - 921 Device ID 421
 - 922 Device ID 422
 - 923 Device ID 423
 - 924 Device ID 424
 - 925 Device ID 425
 - 926 Device ID 426
 - 927 Device ID 427
 - 928 Device ID 428
 - 929 Device ID 429
 - 930 Device ID 430
 - 931 Device ID 431
 - 932 Device ID 432
 - 933 Device ID 433
 - 934 Device ID 434
 - 935 Device ID 435
 - 936 Device ID 436
 - 937 Device ID 437
 - 938 Device ID 438
 - 939 Device ID 439
 - 940 Device ID 440
 - 941 Device ID 441
 - 942 Device ID 442
 - 943 Device ID 443
 - 944 Device ID 444
 - 945 Device ID 445
 - 946 Device ID 446
 - 947 Device ID 447
 - 948 Device ID 448
 - 949 Device ID 449
 - 950 Device ID 450
 - 951 Device ID 451
 - 952 Device ID 452
 - 953 Device ID 453
 - 954 Device ID 454
 - 955 Device ID 455
 - 956 Device ID 456
 - 957 Device ID 457
 - 958 Device ID 458
 - 959 Device ID 459
 - 960 Device ID 460
 - 961 Device ID 461
 - 962 Device ID 462
 - 963 Device ID 463
 - 964 Device ID 464
 - 965 Device ID 465
 - 966 Device ID 466
 - 967 Device ID 467
 - 968 Device ID 468
 - 969 Device ID 469
 - 970 Device ID 470
 - 971 Device ID 471
 - 972 Device ID 472
 - 973 Device ID 473
 - 974 Device ID 474
 - 975 Device ID 475
 - 976 Device ID 476
 - 977 Device ID 477
 - 978 Device ID 478
 - 979 Device ID 479
 - 980 Device ID 480
 - 981 Device ID 481
 - 982 Device ID 482
 - 983 Device ID 483
 - 984 Device ID 484
 - 985 Device ID 485
 - 986 Device ID 486
 - 987 Device ID 487
 - 988 Device ID 488
 - 989 Device ID 489
 - 990 Device ID 490
 - 991 Device ID 491
 - 992 Device ID 492
 - 993 Device ID 493
 - 994 Device ID 494
 - 995 Device ID 495
 - 996 Device ID 496
 - 997 Device ID 497
 - 998 Device ID 498
 - 999 Device ID 499
 - 1000 Device ID 500
- 6 Technical Specifications
 - 6.1 Absolute Maximum Ratings
 - 6.2 Recommended Operating Conditions
 - 6.3 Physical Characteristics
- 7 Current Consumption
- 8 Revision History
- 9 Disclaimer
- On Board
 - 9.1 Lattice Mach XO2 CPLD
 - 9.2 Programmable Clock Generator
 - 9.3 High-Speed USB2 ULPI Transceiver
 - 9.4 EEPROM
 - 9.5 LEDs
- 10 Interface
 - 10.1 Ethernet
 - 10.2 USB
 - 10.3 UART
 - 10.4 I2C
 - 10.5 SPI
 - 10.6 PS

- PCI Express interface
 - SATA 3.1 interface
 - DisplayPort interface with video resolution up to 4k x 2k
 - 2x USB 3.0 specification compliant interface implementing a 5 Gbit/s line rate
- **Power**
 - All power regulators on board
- **Dimension**
 - 40 x 50 mm
- **Note**
 - * depends on assembly version
 - ** also non low power assembly options possible
 - *** depends on used U+ Zynq and DDR4 combination
 - Rugged for shock and high vibration

Additional assembly options are available for cost or performance optimization upon request.

Block Diagram

TE0820

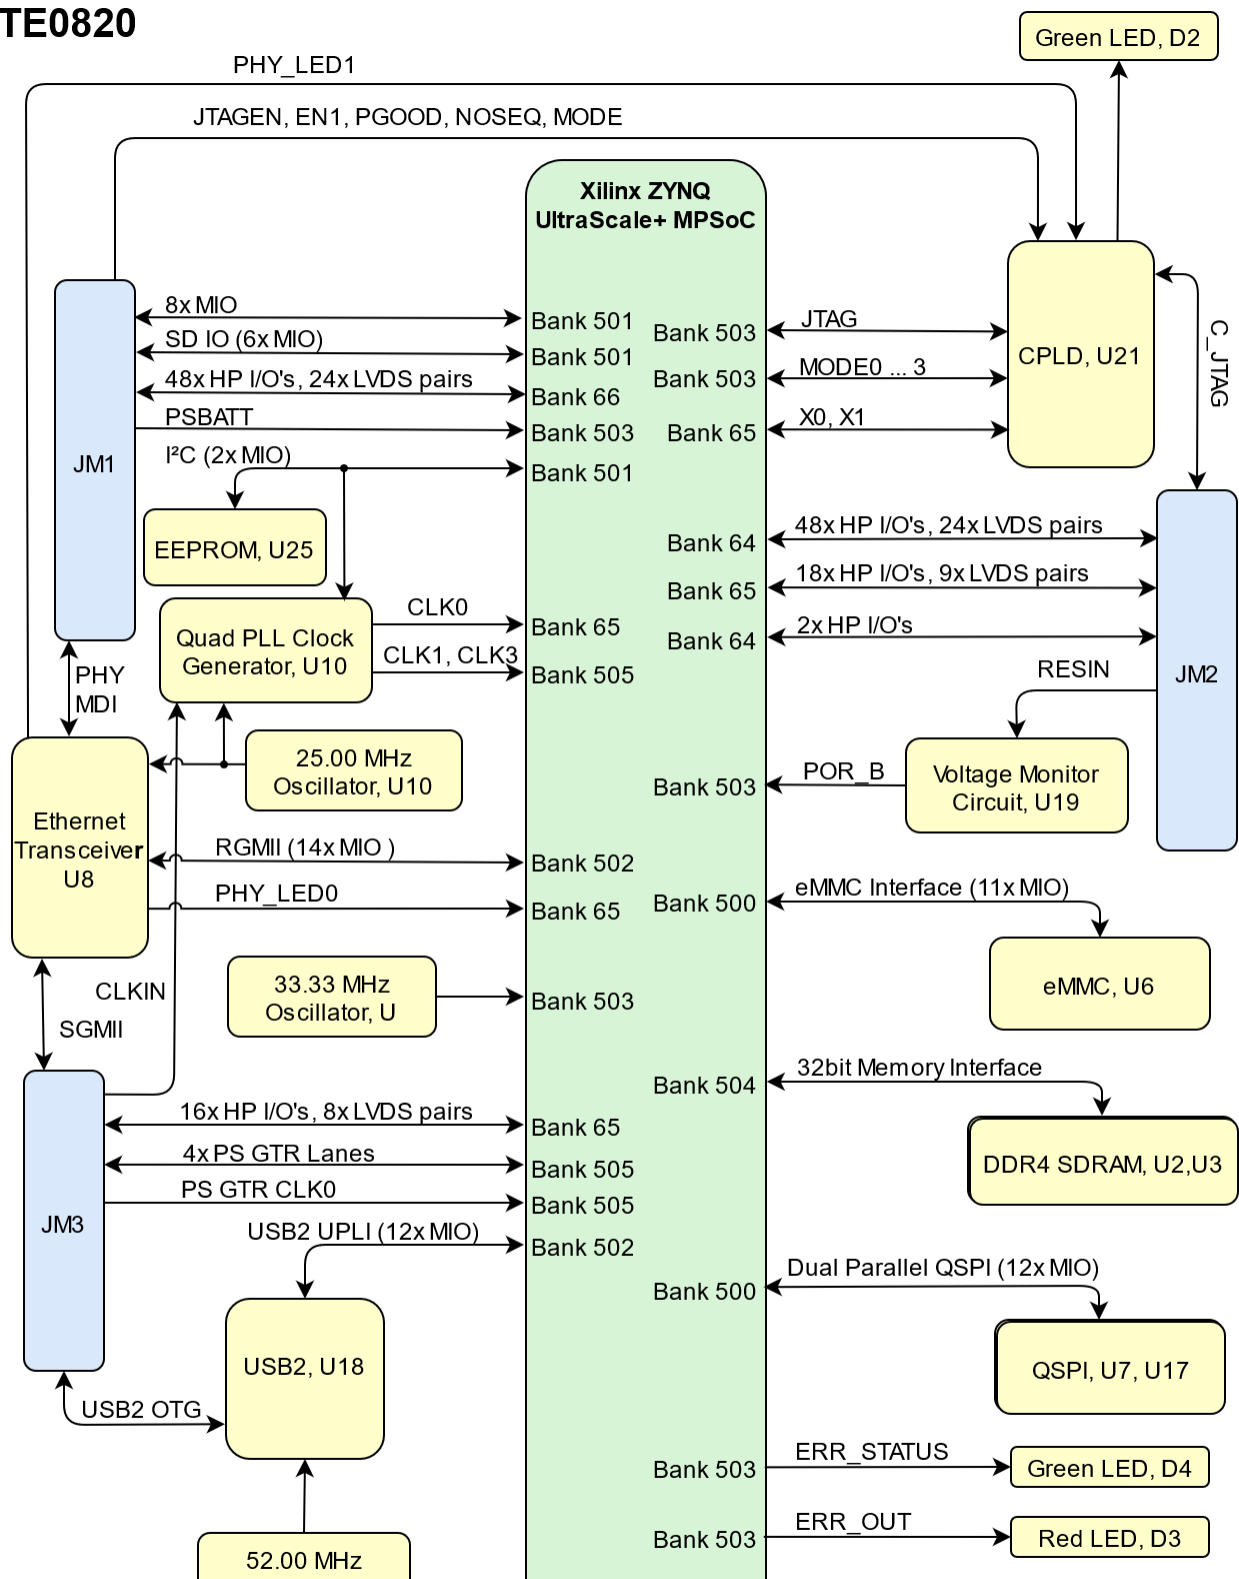

Oscillator, U14


Bank 503

DONE

Red LED, D1

TE0820-03 block diagram

Main Components

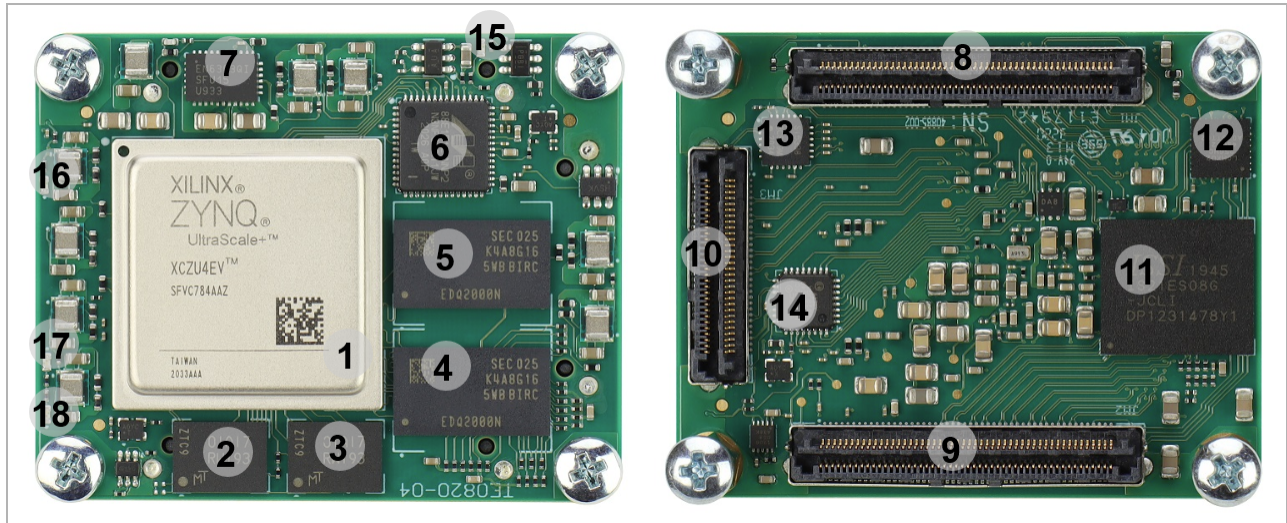

TE0820-03 main components

1. Xilinx Zynq UltraScale+ MPSoC, U1
2. 1.8V, 512 Mbit QSPI flash memory, U7
3. 1.8V, 512 Mbit QSPI flash memory, U17
4. 8 Gbit (512 x 16) DDR4 SDRAM, U2
5. 8 Gbit (512 x 16) DDR4 SDRAM, U3
6. Marvell Alaska 88E1512 integrated 10/100/1000 Mbps energy efficient ethernet transceiver, U8
7. 6A PowerSoC DC-DC converter (PL_VCCINT, 0.85V), U5
8. B2B connector Samtec Razor Beam™ LSHM-150, JM1
9. B2B connector Samtec Razor Beam™ LSHM-150, JM2
10. B2B connector Samtec Razor Beam™ LSHM-130, JM3
11. 8 GByte eMMC memory, U6
12. Lattice Semiconductor MachXO2 System Controller CPLD, U21
13. I2C programmable, any frequency, any output quad clock generator, U10
14. Highly integrated full featured hi-speed USB 2.0 ULPI transceiver, U18
15. LED D1(Red) Done Pin
16. LED D2 (Green) CPLD Status, User LED
17. LED D3 (Red) PS Error
18. LED D4 (Green) PS Error Status

Initial Delivery State

Storage device name	Content	Notes
Dual QSPI Flash Memory	Not programmed	
eMMC Memory	Not programmed	
DDR4 SDRAM	Not programmed	
Programmable Clock Generator	Not programmed	

CPLD (LCMXO2-256HC)	Programmed	TE0820 CPLD
---------------------	------------	-----------------------------

Initial delivery state of programmable devices on the module

Configuration Signals

Two different firmware versions are available, one with the QSPI boot option and other with the SD Card boot option.

MODE Pin	Boot Mode
High	QSPI*
Low	SD Card*

*changable also with other CPLD Firmware: [TE0820 CPLD](#)
Boot process.

Signal	B2B	I/O	Note
EN1	JM1-28	Input	CPLD Enable Pin
RESIN	JM2-18	Input	General Reset

Reset process.

Signals, Interfaces and Pins

Board to Board (B2B) I/Os

Zynq MPSoC's I/O banks signals connected to the B2B connectors:

Bank	Type	B2B Connector	I/O Signal Count	Voltage	Notes
64	HP	JM2	48x Single Ended, 24x LVDS Pairs	Variable	Max voltage 1.8V
64	HP	JM2	2x Single Ended	Variable	Max voltage 1.8V
65	HP	JM2	18x Single Ended, 9x LVDS Pairs	Variable	Max voltage 1.8V
65	HP	JM3	16x Single Ended, 8x LVDS Pairs	Variable	Max voltage 1.8V
66	HP	JM1	48x Single Ended, 24x LVDS Pairs	Variable	Max voltage 1.8V
500	MIO	JM1	8x Single Ended	1.8V	
501	MIO	JM1	6x Single Ended	3.3V	
505	GTR	JM3	16x Single Ended, 8x LVDS Pairs	-	4x Lanes
505	GTR CLK	JM3	1x differential Clock	-	

General PL I/O to B2B connectors information

For detailed information about the pin-out, please refer to the [Pin-out table](#).

MGT Lanes

The Xilinx Zynq UltraScale+ device used on the TE0820 module has 4 GTR transceivers. All 4 are wired directly to B2B connector JM3. MGT (Multi Gigabit Transceiver) lane consists of one transmit and one receive (TX/RX) differential pairs, four signals total per one MGT lane. Following table lists lane number, FPGA bank number, transceiver type, signal schematic name, board-to-board pin connection and FPGA pins connection:

Lane	Bank	Signal Name	B2B Pin	Note
0	505	- B505_RX0_P - B505_RX0_N - B505_TX0_P - B505_TX0_N	- JM3-26 - JM3-28 - JM3-25 - JM3-27	
1	505	- B505_RX1_P - B505_RX1_N - B505_TX1_P - B505_TX1_N	- JM3-20 - JM3-22 - JM3-19 - JM3-21	
2	505	- B505_RX2_P - B505_RX2_N - B505_TX2_P - B505_TX2_N	- JM3-14 - JM3-16 - JM3-13 - JM3-15	
3	505	- B505_RX3_P - B505_RX3_N - B505_TX3_P - B505_TX3_N	- JM3-8 - JM3-10 - JM3-7 - JM3-9	

MGT Lanes connection

There are 3 clock sources for the GTR transceivers. B505_CLK0 is connected directly to B2B connector JM3, so the clock can be provided by the carrier board. Clocks B505_CLK1 and B505_CLK3 are provided by the on-board clock generator (U10). As there are no capacitive coupling of the data and clock lines that are connected to the connectors, these may be required on the user's PCB depending on the application.

Clock signal	Bank	Connected to	Notes
B505_CLK0_P	505	B2B, JM3-31	Supplied by the carrier board
B505_CLK0_N	505	B2B, JM3-33	Supplied by the carrier board
B505_CLK1_P	505	U10, CLK2A	On-board Si5338A
B505_CLK1_N	505	U10, CLK2B	On-board Si5338A
B505_CLK2_P	505	N/A	Not connected
B505_CLK2_N	505	N/A	Not connected
B505_CLK3_P	505	U10, CLK1A	On-board Si5338A
B505_CLK3_N	505	U10, CLK1B	On-board Si5338A

MGT Clock Sources Information

JTAG Interface

JTAG access to the Xilinx Zynq-7000 is provided through B2B connector JM2.

JTAG Signal	B2B Connector Pin	Notes
TMS	JM2-93	
TDI	JM2-95	
TDO	JM2-97	
TCK	JM2-99	
JTAGEN	JM1-89	Pulled Low: Xilinx Zynq UltraScale+ MPSoC Pulled High: Lattice MachXO CPLD

JTAG pins connection

Pin 89 JTAGEN of B2B connector JM1 is used to control which device is accessible via JTAG. If set to low or grounded, JTAG interface will be routed to the Xilinx Zynq MPSoC. If pulled high, JTAG interface will be routed to the System Controller CPLD.

I2C Addresses

On-board I²C devices are connected to MIO38 (SCL) and MIO39 (SDA) which are configured as I²C0 by default. Addresses for on-board I²C slave devices are listed in the table below:

I2C Device	I2C Address	Notes
PLL Clock Generator, U10	0x70/ 0x71	
EEPROM, U25	0x50	

Address table of the I2C bus slave devices

MIOs

MIO Pin	Connected to	B2B	Notes
0...5	QSPI Flash, U7	-	SPI Flash
7...12	QSPI Flash, U17	-	SPI Flash
13...23	eMMC, U6		eMMC
24	ETH Transceiver, U8	-	ETH_RST
25	USB2.0 Transceiver, U18	-	OTG_RST
26...33	User MIO	JM1	
34...37	N.C	-	N.C
38...39	EEPROM, U25	-	I2C_SDA/SCL
40...45	N.C		N.C
46...51	SD Card	JM1	
52...63	USB2.0 Transceiver, U18	-	
63...77	Ethernet Transceiver, U8	-	

MIOs pins

Test Points

Test Point	Signal	Connected to	Notes
1	PS_LP0V85	Voltage Regulator, U12	
2	DDR_2V5	Voltage Regulator, U4	
3	PS_AVCC	Voltage Regulator, U9	
4	DDR_1V2	Voltage Regulator, U15	
5	PS_AVTT	Voltage Regulator, U3	
6	VTT	Regulator, U16	
7	PS_FP0V85	Voltage Regulator, U26	
8	VREFA	Regulator, U16	
10	PS_PLL	Voltage Regulator, U23	
11	PL_VCCINT	Voltage Regulator, U5	
15	PL_VCCINT_IO	Voltage Regulator, U27	
16	PL_VCU	Voltage Regulator, U24	

Test Points Information

On-board Peripherals

Chip/Interface	Designator	Notes
QSPI Flash	U7, U17	
EEPROM	U25	
DDR4 SDRAM	U2,U3	
GigaBit Ethernet	U8	
USB2.0 Transceiver	U18	
eMMC Memory	U6	
Oscillators	U32, U14, U11	
Programmable Clock Generator	U10	
CPLD	U21	
LEDs	D1...3	

On board peripherals

System Controller CPLD

The System Controller CPLD (U21) is provided by Lattice Semiconductor LCMXO2-256HC (MachXO2 product family). It is the central system management unit with module specific firmware installed to monitor and control various signals of the FPGA, on-board peripherals, I/O interfaces and module.

Special purpose pins are connected to System Controller CPLD and have following default configuration:

Pin Name	Mode	Function	Default Configuration
----------	------	----------	-----------------------

EN1	Input	Power Enable	No hard wired function on PCB. When forced low, PGOOD goes low without effect on power management
PGOOD	Output	Power Good	Only indirect used for power status, see CPLD description
NOSEQ	-	-	No used for Power sequencing, see CPLD description
RESIN	Input	Reset	Active low reset, gated to POR_B
JTAGEN	Input	JTAG Select	Low for normal operation, high for CPLD JTAG access

System Controller CPLD special purpose pins

Please check the entire information at [TE0820 CPLD](#).

See also TE0820 System Controller [CPLD page](#).

eMMC Memory

eMMC Flash memory device(U6) is connected to the ZynqMP PS MIO bank 500 pins MIO13..MIO23. eMMC chips IS21ES08G-JCLI (FLASH - NAND Speicher-IC (64 Gb x 1) MMC) is used.

DDR4 Memory

The TE0820 SoM has dual 8 Gb volatile DDR4 SDRAM IC for storing user application code and data.

- Part number: K4A8G165WB-BIRC
- Supply voltage: 1.2V
- Speed: 2400 Mbps
- Temperature: -40 ~ 95 °C

Quad SPI Flash Memory

Two quad SPI compatible serial bus flash MT25QU512ABB8E12-0SIT memory chips are provided for FPGA configuration file storage. After configuration completes the remaining free memory can be used for application data storage. All four SPI data lines are connected to the FPGA allowing x1, x2 or x4 data bus widths to be used. The maximum data transfer rate depends on the bus width and clock frequency.

Gigabit Ethernet

On-board Gigabit Ethernet PHY (U8) is provided with Marvell Alaska 88E1512 IC (U8). The Ethernet PHY RGMII interface is connected to the ZynqMP Ethernet3 PS GEM3. I/O voltage is fixed at 1.8V for HSTL signaling. The reference clock input of the PHY is supplied from an on-board 25.000000 MHz oscillator (U11).

High-speed USB ULPI PHY

Pin	Schematic	Connected to	Note
MDIP0...3	PHY_MDI0...3	B2B, JM1	
MDC	ETH_MDC	MIO76	

MDIO	ETH_MDIO	MIO77	
S_IN	S_IN	B2B, JM3	
S_OUT	S_OUT	B2B, JM3	
TXD0...3	ETH_TXD0...3	MIO65...68	
TX_CTRL	ETH_TXCTL	MIO69	
TX_CLK	ETH_TXCK	MIO64	
RXD0...3	ETH_RXD0...3	MIO71...74	
RX_CTRL	ETH_RXCTL	MIO75	
RX_CLK	ETH_RXCK	MIO70	
LED1	PHY_LED1	CPLD, U21	
RESETn	ETH_RST	MIO24	

GigaBit Ethernet connection

USB2.0 Transceiver

Hi-speed USB ULPI PHY (U18) is provided with USB3320 from Microchip. The ULPI interface is connected to the Zynq PS USB0 via MIO52..63, bank 502. The I/O voltage is fixed at 1.8V and PHY reference clock input is supplied from the on-board 52.00 MHz oscillator (U14).

PHY Pin	ZYNQ Pin	B2B Name	Notes
ULPI	MIO52..63	-	Zynq USB0 MIO pins are connected to the USB PHY.
REFCLK	-	-	52.000000 MHz from on-board oscillator (U14).
REFSEL[0..2]	-	-	Reference clock frequency select, all set to GND selects 52.000000 MHz.
RESETB	MIO25	-	Active low reset.
CLKOUT	MIO52	-	Connected to 1.8V, selects reference clock operation mode.
DP, DM	-	OTG_D_P, OTG_D_N	USB data lines routed to B2B connector JM3 pins 47 and 49.
CPEN	-	VBUS_V_EN	External USB power switch active high enable signal, routed to JM3 pin 17.
VBUS	-	USB_VBUS	Connect to USB VBUS via a series of resistors, see reference schematics, routed to JM3 pin 55.
ID	-	OTG_ID	For an A-device connect to ground, for a B-device left floating. routed from JM3 pin 23.

General overview of the USB PHY signals

EEPROM

There is a 2Kb EEPROM (U25) provided on the module TE0820.

MIO Pin	Schematic	U25 Pin	Notes
MIO39	I2C_SDA	SDA	
MIO38	I2C_SCL	SCL	

I2C EEPROM interface MIOs and pins

Programmable Clock Generator

There is a Silicon Labs I²C programmable clock generator Si5338A (U10) chip on the module. It's output frequencies can be programmed using the I²C bus address 0x70 or 0x71. Default address is 0x70, IN4 /I2C_LSB pin must be set to high for address 0x71.

A 25.000000 MHz oscillator is connected to the pin IN3 and is used to generate the output clocks. The oscillator has its output enable pin permanently connected to 1.8V power rail, thus making output frequency available as soon as 1.8V is present. Three of the Si5338 clock outputs are connected to the FPGA. One is connected to a logic bank and the other two are connected to the GTR banks.

Once running, the frequency and other parameters can be changed by programming the device using the I²C bus connected between the FPGA (master) and clock generator (slave). For this, proper I²C bus logic has to be implemented in FPGA.

U25 Pin	Signal	Connected to	Direction	Note
IN0..1	CLK_IN	JM3	IN	
IN2	CLK_25M	Oscillator, U11	IN	
SCL	I2C_SCL	EEPROM,U25	INOUT	
SDA	I2C_SDA	EEPROM,U25	INOUT	
CLK0	CLK0	JM3	OUT	
CLK1	B505_CLK3	FPGA Bank 505	IN	
CLK2	B505_CLK1	FPGA Bank 505	IN	
CLK3	CLK3_N		IN	

Programmable Clock Generator Inputs and Outputs

Clock Sources

Designator	Description	Frequency	Clock Destination
U32	MEMS Oscillator	33.33 MHz	
U11	MEMS Oscillator	25 MHz	
U14	MEMS Oscillator	52 MHz	

Osillators

LEDs

Designator	Color	Connected to	Active Level	Note
------------	-------	--------------	--------------	------

D1	Red	DONE	Low	
D2	Green	USR_LED	High	
D3	Red	ERR_OUT	High	
D4	Green	ERR_STATUS	High	

On-board LEDs

Power and Power-on Sequence

Power Supply

Power supply with minimum current capability of 3A for system startup is recommended.

Power Consumption

Power Input Pin	Typical Current
VIN	TBD*
3.3VIN	TBD*

Power Consumption


* TBD - To Be Determined soon with reference design setup.

For the lowest power consumption and highest efficiency of the on-board DC-DC regulators it is recommended to power the module from one single 3.3V supply. All input power supplies should have a nominal value of 3.3V. Although the input power supplies can be powered up in any order, it is recommended to power them up simultaneously.



To avoid any damage to the module, check for stabilized on-board voltages should be carried out (i.e. power good and enable signals) before powering up any Zynq's I/O bank voltages VCCO_x. All I/Os should be tri-stated during power-on sequence.

Power Distribution Dependencies

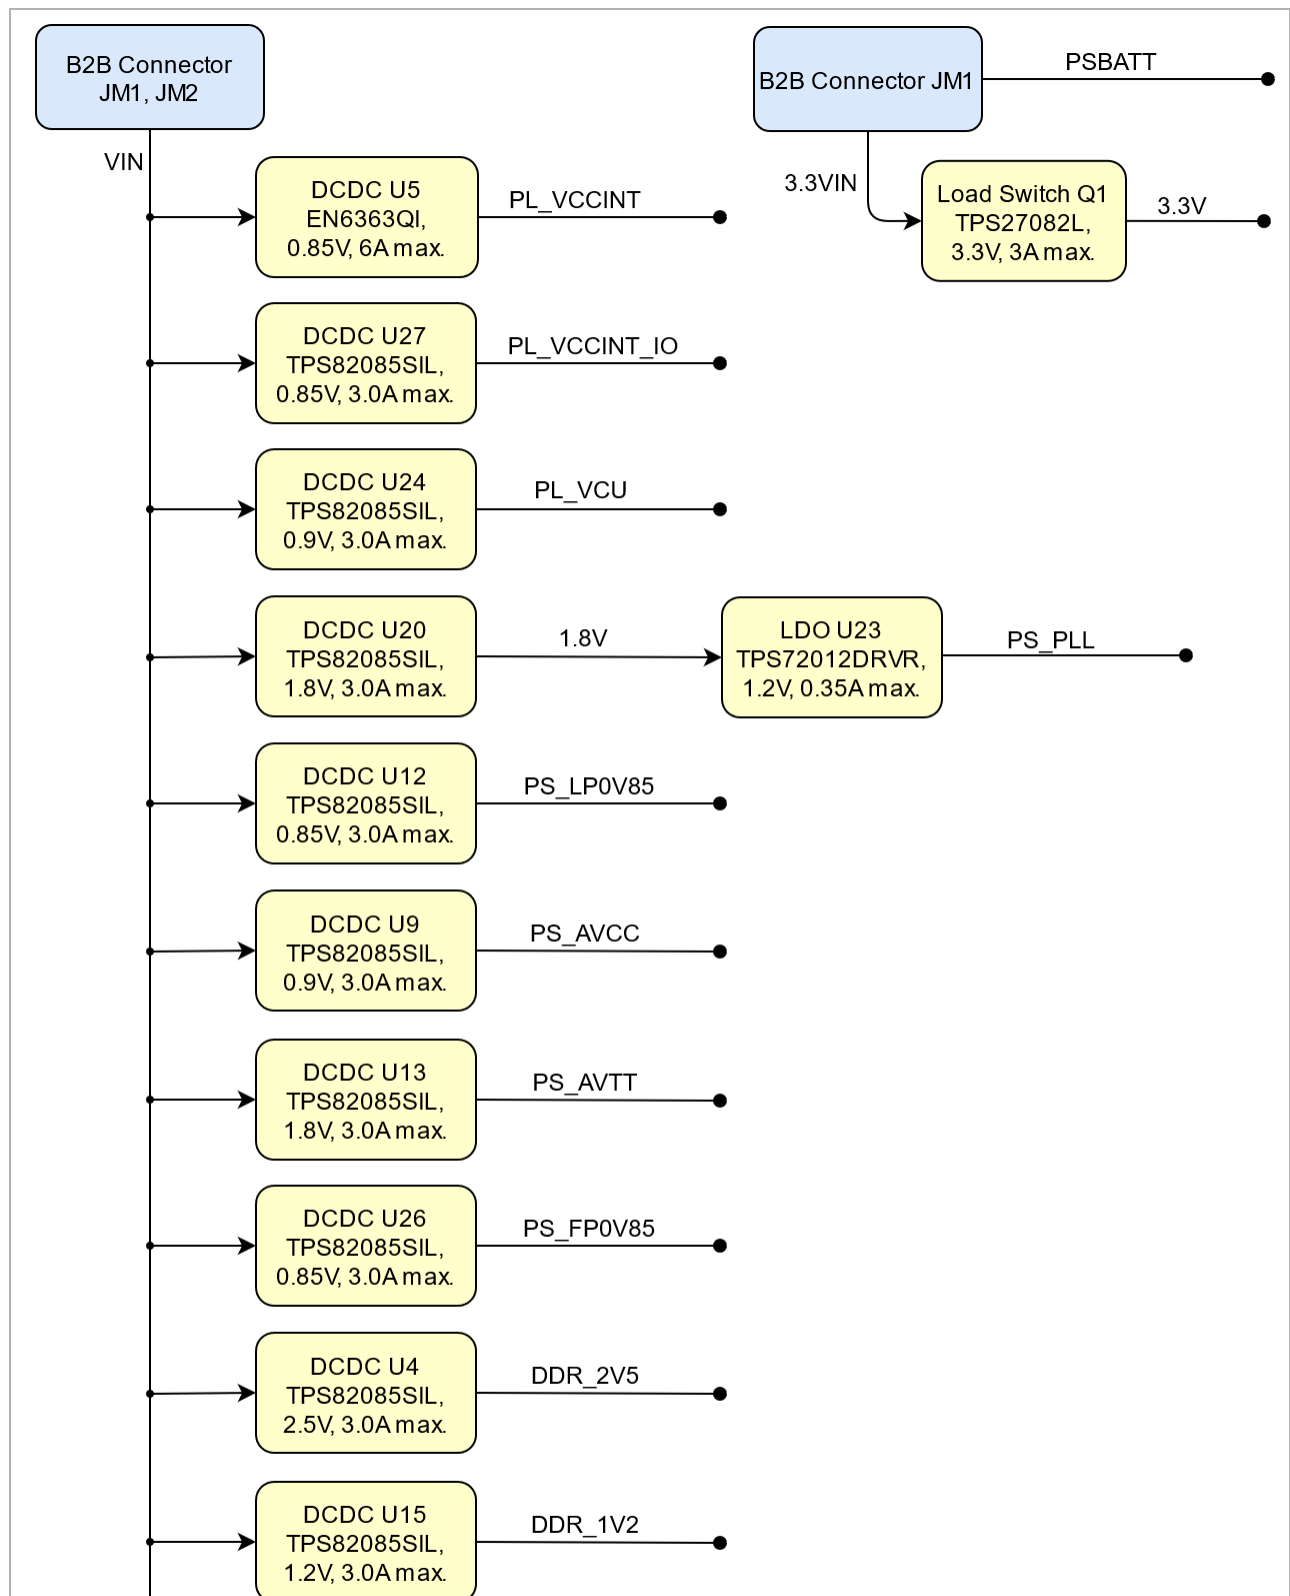

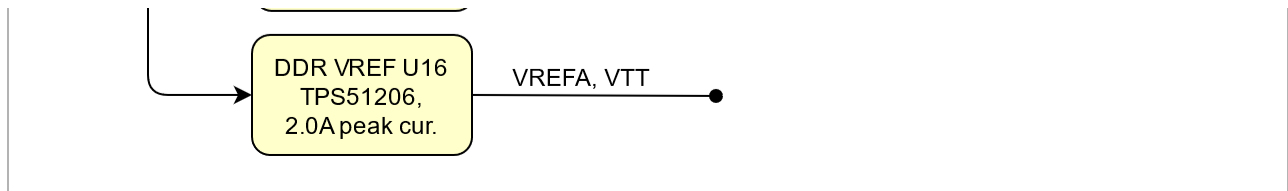


Figure 3: TE0820-03 Power Distribution Diagram

See also Xilinx datasheet DS925 for additional information. User should also check related base board documentation when intending base board design for TE0820 module.

Power-On Sequence

The TE0820 SoM keeping a specific sequence of enabling the on-board DC-DC converters dedicated to the particular functional units of the Zynq chip and powering up the on-board voltages.

Following diagram clarifies the sequence of enabling the particular on-board voltages, which will power-up in descending order as listed in the blocks of the diagram:

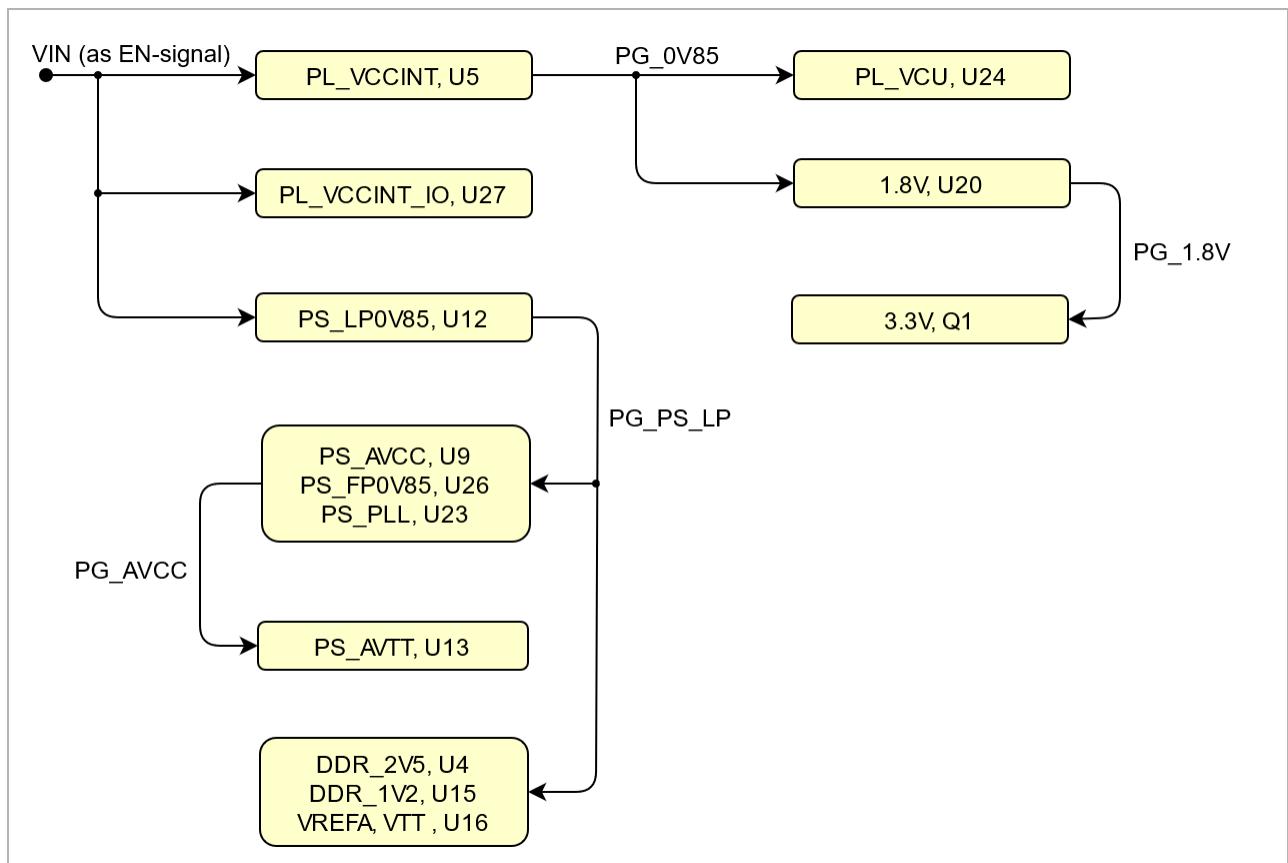


Figure 4: TE0820-03 Power-on Sequence Diagram

For highest efficiency of the on-board DC-DC regulators, it is recommended to use one 3.3V power source for both VIN and 3.3VIN power rails. Although VIN and 3.3VIN can be powered up in any order, it is recommended to power them up simultaneously.

It is important that all carrier board I/Os are 3-stated at power-on until 3.3V_out or 1.8V_out is present on B2B connector JM2 pins 10 and 12, indicating that all on-module voltages have become stable and module is properly powered up.

See Xilinx datasheet DS925 for additional information. User should also check related carrier board documentation when choosing carrier board design for TE0715 module.

Power Rails

Power Rail Name on B2B Connector	JM1 Pins	JM2 Pins	Direction	Notes
VIN	1, 3, 5	2, 4, 6, 8	Input	Supply voltage from the carrier board
3.3V	-	10, 12	Output	Internal 3.3V voltage level
3.3VIN	13, 15	-	Input	Supply voltage from the carrier board
1.8V	39	-	Output	Internal 1.8V voltage level
JTAG VREF	-	91	Output	JTAG reference voltage. Attention: Net name on schematic is "3.3 VIN"
VCCO_64	-	7, 9	Input	High performance I/O bank voltage
VCCO_65	-	5	Input	High performance I/O bank voltage
VCCO_66	9, 11	-	Input	High performance I/O bank voltage

Module power rails.

Bank Voltages

FPGA Bank	Schematic	Voltage	Note
Bank 24 HD		N.C.	Not Connected
Bank 25 HD		N.C.	Not Connected
Bank 26 HD		N.C.	Not Connected
Bank 44 HD		N.C.	Not Connected
Bank 64 HP	VCCO_64	Variable	Max voltage 1.8V
Bank 65 HP	VCCO_65	Variable	Max voltage 1.8V
Bank 66 HP	VCCO_66	Variable	Max voltage 1.8V
Bank 500 PSMIO	VCCO_PSIO0_500	1.8V	
Bank 501 PSMIO	VCCO_PSIO1_501	3.3V	
Bank 502 PSMIO	VCCO_PSIO2_502	1.8V	

Bank 503 PSCONFIG	VCCO_PSIO3_503	1.8V	
Bank 504 PSDDR	DDR_1V2	1.2V	

Zynq SoC bank voltages.

Board to Board Connectors



These connectors are hermaphroditic. Odd pin numbers on the module are connected to even pin numbers on the baseboard and vice versa.

4 x 5 modules use two or three [Samtec Razor Beam LSHM connectors](#) on the bottom side.

- 2 x REF-189016-02 (compatible to LSHM-150-04.0-L-DV-A-S-K-TR), (100 pins, "50" per row)
- 1 x REF-189017-02 (compatible to LSHM-130-04.0-L-DV-A-S-K-TR), (60 pins, "30" per row) (depending on module)

Connector Mating height

When using the same type on baseboard, the mating height is 8mm. Other mating heights are possible by using connectors with a different height

Order number	Connector on baseboard	compatible to	Mating height
23836	REF-189016-01	LSHM-150-02.5-L-DV-A-S-K-TR	6.5 mm
	LSHM-150-03.0-L-DV-A-S-K-TR	LSHM-150-03.0-L-DV-A-S-K-TR	7.0 mm
23838	REF-189016-02	LSHM-150-04.0-L-DV-A-S-K-TR	8.0 mm
	LSHM-150-06.0-L-DV-A-S-K-TR	LSHM-150-06.0-L-DV-A-S-K-TR	10.0mm
26125	REF-189017-01	LSHM-130-02.5-L-DV-A-S-K-TR	6.5 mm
	LSHM-130-03.0-L-DV-A-S-K-TR	LSHM-130-03.0-L-DV-A-S-K-TR	7.0 mm
24903	REF-189017-02	LSHM-130-04.0-L-DV-A-S-K-TR	8.0 mm
	LSHM-130-06.0-L-DV-A-S-K-TR	LSHM-130-06.0-L-DV-A-S-K-TR	10.0mm

Connectors.

The module can be manufactured using other connectors upon request.

Connector Speed Ratings

The LSHM connector speed rating depends on the stacking height; please see the following table:

Stacking height	Speed rating
12 mm, Single-Ended	7.5 GHz / 15 Gbps
12 mm, Differential	6.5 GHz / 13 Gbps

5 mm, Single-Ended	11.5 GHz / 23 Gbps
5 mm, Differential	7.0 GHz / 14 Gbps

Speed rating.

Current Rating

Current rating of Samtec Razor Beam™ LSHM B2B connectors is 2.0A per pin (2 adjacent pins powered).

Connector Mechanical Ratings

- Shock: 100G, 6 ms Sine
- Vibration: 7.5G random, 2 hours per axis, 3 axes total

Manufacturer Documentation

File	Modified
PDF File hsc-report_lshm-lshm-05mm_web.pdf High speed test report	07 04, 2016 by Thorsten Trenz
PDF File lshm_dv.pdf LSHM catalog page	07 04, 2016 by Thorsten Trenz
PDF File LSHM-1XX-XX.X-X-DV-A-X-X-TR-FOOTPRINT(1).pdf Recommended layout and stencil drawing	07 04, 2016 by Thorsten Trenz
PDF File LSHM-1XX-XX.X-XX-DV-A-X-X-TR-MKT.pdf Technical drawing	07 04, 2016 by Thorsten Trenz
PDF File REF-189016-01.pdf Technical Drawing	07 04, 2016 by Thorsten Trenz
PDF File REF-189016-02.pdf Technical Drawing	07 04, 2016 by Thorsten Trenz
PDF File REF-189017-01.pdf Technical Drawing	07 04, 2016 by Thorsten Trenz
PDF File REF-189017-02.pdf Technical Drawing	07 04, 2016 by Thorsten Trenz
PDF File TC0923--2523_report_Rev_2_qua.pdf Design qualification test report	07 04, 2016 by Thorsten Trenz
PDF File tc0929--2611_qua(1).pdf Shock and vibration report	07 04, 2016 by Thorsten Trenz

[Download All](#)

Technical Specifications

Absolute Maximum Ratings

Parameter	Min	Max	Units	Notes
VIN supply voltage	-0.3	7	V	See EN6347QI and TPS82085SiL datasheets
3.3VIN supply voltage	-0.1	3.630	V	Xilinx DS925 and TPS27082L datasheet
PS I/O supply voltage, VCCO_PSIO	-0.5	3.630	V	Xilinx document DS925
PS I/O input voltage	-0.5	VCCO_PSIO + 0.55	V	Xilinx document DS925
HP I/O bank supply voltage, VCCO	-0.5	2.0	V	Xilinx document DS925
HP I/O bank input voltage	-0.55	VCCO + 0.55	V	Xilinx document DS925
PS GTR reference clocks absolute input voltage	-0.5	1.1	V	Xilinx document DS925
PS GTR absolute input voltage	-0.5	1.1	V	Xilinx document DS925
Voltage on SC CPLD pins	-0.5	3.75	V	Lattice Semiconductor MachXO2 datasheet
Storage temperature	-40	+85	°C	See eMMC datasheet

PS absolute maximum ratings

Recommended Operating Conditions

Parameter	Min	Max	Units	Notes
VIN supply voltage	3.3	6	V	See TPS82085S datasheet
3.3VIN supply voltage	3.3	3.465	V	See LCMXO2-256HC, Xilinx DS925 datasheet
PS I/O supply voltage, VCCO_PSIO	1.710	3.465	V	Xilinx document DS925
PS I/O input voltage	-0.20	VCCO_PSIO + 0.20	V	Xilinx document DS925
HP I/O banks supply voltage, VCCO	0.950	1.9	V	Xilinx document DS925
HP I/O banks input voltage	-0.20	VCCO + 0.20	V	Xilinx document DS925
Voltage on SC CPLD pins	-0.3	3.6	V	Lattice Semiconductor MachXO2 datasheet


Operating Temperature Range	0	85	°C	Xilinx document DS925, extended grade Zynq temperature range
-----------------------------	---	----	----	--

Recommended operating conditions.

Physical Dimensions

- Module size: 50 mm × 40 mm. Please download the assembly diagram for exact numbers.
- Mating height with standard connectors: 8 mm
- PCB thickness: 1.6 mm
- Highest part on PCB: approximately 5 mm. Please download the step model for exact numbers.

All dimensions are shown in millimeters.

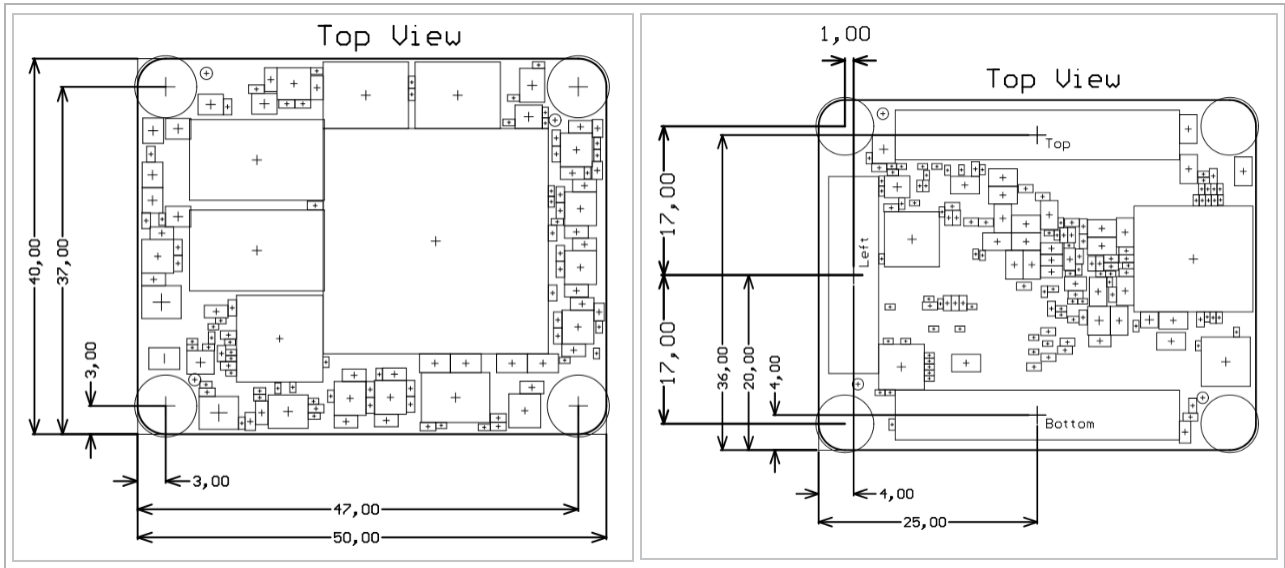

Currently Offered Variants

Trenz shop TE0820 overview page	
English page	German page

Trenz Electronic Shop Overview

Revision History

Hardware Revision History

Date	Revision	Changes	Documentation Link	
------	----------	---------	--------------------	--

2020-08-14	04	• Fixed DDR4 connection (BG1), support B-die DDR4 Industrial grade chips • Added R93, changed value C62, change obsolete U28 • Added R89 (10R) • Added additional caps 4.7uF to PS_AVTT /PS_AVCC (Xilinx doc UG583) • Changed R51 20k ->10K (PS_AVCC = 0.85V, Xilinx doc DS925 v1.17) • Fixed DDR4 connection (Alert) • Added 3.3V signal to CPLD • Added testpoints • LIB components update	PCN-20200616	TE0820-4
2019-01-02	03	• Fixed VCU connection: add additional DCDC (0.9V) • LIB components update • Change package 1K resistors (0402 -> 0201) • Added LEDs (1x user LED, 1x LED for ERR_STATUS, 1xLED for ERR_OUT) • Change obsolete 2xSPI Flash (256MBit) -> 2xSPI Flash (512MBit) • Added additional DCDCs (PL_VCCINT_I O, PS_FP0V85) • Changed DCDC (U5) 6A (optional 4A)	PCN-20190110	TE0820-03

2017-08-17	02	- Added MAC EEPROM (slave address) - LIB components update - Fixed SD Card connection - Fixed sense connection from DCDC - Made correct power connection for VCU (removed DCDC, added resistors and caps like as Xilinx recommended) - Added resistors for variants (ZU+ with/without VCU) - Added termination resistors (240R) to VRP pins fro all HP-banks	PCN-20171117	TE0820-02
2016-12-23	01	Prototype only	-	TE0820-01

Hardware Revision History



Figure 6: Module hardware revision number

Document Change History

Date	Revision	Contributor	Description
Error rendering macro 'page-info' Ambiguous	Error rendering macro 'page-info' Ambiguous	Error rendering macro 'page-info' Ambiguous	Corrected Key features

method
overload
ing for
method
jdk.
proxy24
1.\$Proxy
3496#ha
sConten
tLevelPe
rmission
.
Cannot
resolve
which
method
to
invoke
for [null,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.
pages.
Page]
due to
overlapp
ing
prototyp
es
between
:
[interfac

method
overload
ing for
method
jdk.
proxy24
1.\$Proxy
3496#ha
sConten
tLevelPe
rmission
.
Cannot
resolve
which
method
to
invoke
for [null,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.
pages.
Page]
due to
overlapp
ing
prototyp
es
between
:
[interfac

method
overload
ing for
method
jdk.
proxy24
1.\$Proxy
3496#ha
sConten
tLevelPe
rmission
.
Cannot
resolve
which
method
to
invoke
for [null,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.
pages.
Page]
due to
overlapp
ing
prototyp
es
between
:
[interfac

e com.
atlassian
.
confluen
ce.user.
Conflue
nceUser
, class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]
[interfac
e com.
atlassian
.user.
User,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]

e com.
atlassian
.
confluen
ce.user.
Conflue
nceUser
, class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]
[interfac
e com.
atlassian
.user.
User,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]

e com.
atlassian
.
confluen
ce.user.
Conflue
nceUser
, class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]
[interfac
e com.
atlassian
.user.
User,
class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]

2021-12-17	v.99	Vadim Yunitski	Corrected 'Bank voltages' table
2021-07-14	v.98	John Hartfiel	bugfix boot mode
2021-07-05	v.97	John Hartfiel	- published - style changes
2020-09-18	v.95	Pedram Babakhani	- Update to REV04 - Update the TRM format - Technical Information update
2020-03-16	v.87	John Hartfiel	- Corrected PLL section - Corrected Designators USB, ETH PHY, CLK section
2020-02-03	v.85	Martin Rohrmüller	Corrected #MIOs for QSPI and USB in block diagram
2019-11-28	v.81	Martin Rohrmüller	typo and designator in section USB interface corrected
2019-10-30	v.80	John Hartfiel	typo correction
2019-09-17	v79	Martin Rohrmüller	Updated according to PCN-20190110: eMMC, QSPI-Flash
2019-07-17	v.78	Martin Rohrmüller	Corrected PJTAG Mio Pin29 in table 8
2019-05-08	v.77	John Hartfiel	- Corrected EEPROM I2C Address - Correction USB PHY connection
2018-11-12	v.74	John Hartfiel	update boot section

2018-08-30	v.73	John Hartfiel	• typo correction • update CPLD section • add LEDs to component list • add 3D picture of REV03 instead of REV01 picture
2018-07-12	v.69	Ali Naseri	• Update PCB Rev03
2018-06-11	v.61	John Hartfiel	• Rework chapter currently available products • add PJTAG note to MIOtable
2018-03-12	v.54		• Correction Power Rail Section
2017-11-20	v.51	John Hartfiel	• Correction Default MIO Configuration Table
2017-11-10	v.50	John Hartfiel	• Replace B2B connector section
2017-10-18	v.49	John Hartfiel	• add eMMC section
2017-09-25	v.48	John Hartfiel	• Correction in the "Board to Board (B2B) I/Os" section • Update in the "Variants Currently In Production" section
2017-09-18	v.47	John Hartfiel	• Update PS MIO table
2017-08-30	v.46	Jan Kumann	• MGT lanes section added.
2017-08-24	v.36	John Hartfiel	• Correction in the "Key Features" section.
2017-08-21	v.34	John Hartfiel	• "Initial delivery state" section updated.

2017-08-21	v.33	Jan Kumann	• HW revision 02 block diagram added. • Power distribution and power-on sequence diagram added. • System Controller CPLD and DDR4 SDRAM sections added. • TRM update to the template revision 1.6 • Weight section removed. • Few minor corrections.
2017-08-18	v.7	John Hartfiel	• Style changes • Updated "Boot Mode", "HW Revision History", "Variants Currently In Production" sections • Correction of MIO SD Pin-out, System Controller chapter • Update and new sub-sections on "On Board Peripherals and Interfaces" sections
2017-08-07	v.5	Jan Kumann	• Initial version
--	all	Error renderi ng macro 'page- info' Ambiguo us method overload ing for method jdk. proxy24 1.\$Proxy	• --

3496#hasContentLevelPermission.
Cannot resolve which method to invoke for [null, class java.lang.String, class com.atlassian.confluence.page.Page] due to overlapping prototypes between :
[interface com.atlassian.confluence.user.ConfluenceUser

		, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	
--	--	--	--

Document change history.

Table 21: Document change history

Disclaimer

Data Privacy

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

Document Warranty

The material contained in this document is provided “as is” and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used /modified / copied only in accordance with the terms of such license.

Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

REACH, RoHS and WEEE

REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of [REACH](#). The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no [SVHC \(Substances of Very High Concern\) on the Candidate List](#) are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the [European Chemicals Agency \(ECHA\)](#).

RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

WEEE

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

Error rendering macro 'page-info'

Ambiguous method overloading for method `jdk.`

`proxy241.$Proxy3496#hasContentLevelPermission`. Cannot resolve which method to invoke for `[null, class java.lang.String, class com.atlassian.confluence.pages.Page]` due to overlapping prototypes between: `[interface com.atlassian.confluence.user.ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]` `[interface com.atlassian.user.User, class java.lang.String, class com.atlassian.confluence.core.ContentEntityObject]`