

4 x 5 SoM Integration Guide

Table of Content

- 1 [Table of Content](#)
 - 1.1 [Power and Signal Pin Assignment](#)
 - 1.1.1 [How to Use This Guide](#)
 - 1.1.2 [Module Power Connection Table](#)
 - 1.1.3 [Module Pinout Overview](#)
 - 1.1.4 [Carrier Board Power Connection Table](#)
 - 1.1.5 [Carrier Pinout Overview](#)
 - 1.2 [4x5 Module Controller IOs](#)
 - 1.3 [Remove 4x5 module](#)
 - 1.4 [Compatibility Guide](#)
 - 1.4.1 [Ethernet LED'S](#)
 - 1.4.2 [JM2 pins 1, 3 \(TE0720 Bank 34 Voltage\)](#)
 - 1.5 [Carrier Board Checklist](#)
 - 1.5.1 [Schematic Checklist](#)
 - 1.5.2 [PCB Checklist](#)
 - 1.5.3 [Visual Check of Module placement](#)

Power and Signal Pin Assignment

How to Use This Guide

- This guide is split into two tables:
 - **Module Power Connection Table** section shows the power source of the different FPGA banks and components of the different module boards as well as the power and group location on the B2B connectors of the module site.
 - **Carrier Board Power Connection Table** section shows the power source of the B2B connectors with pins, schematic names and available options of the different carrier boards as well as the power location on the B2B connectors of the carrier site.
 - The PCBs have fixed and variable user supplied I/O voltage pins. Variable power supply pins are colored in four groups (VCCIOA, VCCIOB, VCCIOC and VCCIOD).
1. Find your module model on the **Module Power Connection Table** and check the power supply of the different FPGA banks.
 2. If the power supply is variable(colored), go to the **Carrier Board Power Connection Table** and see how it's connected on your carrier board. Often the power source can be selected by jumper, resistor or variable used from other connector pin of the carrier board. So use the schematic name or the component designator from the table to search for the available options in the PCB schematics or TRM.
 3. Additional Master Pinout Viewer/XDC-Generator is available on [Trenz Electronic Download - Pinout](#)

Module Power Connection Table

Group	1				2				3				4				5				6				7				8	9	special
Module Model	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage	Bank	IOs	Type	Voltage			
TE0710	B15	48	HR	VC CIOA	-	-	-	-	-	-	-	-	B34	50	HR	VC CIOD	B16	6	HR	3.3 V	B14	8	HR	3.3 V	2x 100Mb it ETH						
TE0711	B15	48	HR	VC CIOA	B34	36	HR	VC CIOB	B14	18	HR	3.3 V	B35	50	HR	VC CIOD	B16	6	HR	1.8 V	B14	8	HR	3.3 V	B34	8	HR	VC CIOB	B34(4)	USB	
TE0712	B16	48	HR	VC CIOA	B13	20	HR	VC CIOB	B14	18	HR	3.3 V	B15	50	HR	VC CIOD	B13	6	HR	VC CIOB	B14	8	HR	3.3 V	1x 100Mb it ETH / B13	4	HR	VC CIOB		B14	4x GTP on G2
TE0713																															4x GTP on G2
TE0715 with Z-7015 Z-7012S	B13	48	HR	VC CIOA	B34	16	HR	VC CIOC	B34	18	HR	VC CIOC	B35	50	HR	VC CIOD	B5 01	6	MIO	1.8 V	B500	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	4x GTP on G2

TE0715 with Z-7030	B13	48	HR	VC CIOA	B34	16	HP	VC CIOC	B34	18	HP	VC CIOC	B35	50	HP	VC CIOD	B5 01	6	MIO	1.8 V	B500	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	4x GTP on G2
TE0720	B35	48	HR	VC CIOA	B34	36	HR	VC CIOB	B33	18	HR	VC CIOC	B13	50	HR	VC CIOD	B5 01	6	MIO	1.8 V	B500	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	
TE0820*	B66	48	HP	VC CIOA	B65	16	HP	VC CIOC	B65	18	HP	VC CIOC	B64	50	HP	VC CIOD	B5 01	6	MIO	3.3 V	B5 01	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	4x GTR on G2
TE0821*	B26	48	HD	VC CIOA	B65	16	HP	VC CIOC	B65	18	HP	VC CIOC	B24	48	HD	VC CIOD	B5 01	6	MIO	3.3 V	B5 01	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	4x GTR on G2
TE0823*	B66	48	HP	VC CIOA	B65	16	HP	VC CIOC	B65	18	HP	VC CIOC	B64	50	HP	VC CIOD	B5 01	6	MIO	3.3 V	B5 01	8	MIO	3.3 V	1x Gbit ETH				SGMII	USB	4x GTR on G2
TE0741	B13	48	HR	VC CIOA	B16	16	HR	VC CIOB	B15	18	HR	VC CIOC	B12	50	HR	VC CIOD	1x GTX	1 Lane			B14	8	HR	3.3 V	2x GTX	2 Lan es		1x GTX		4x GTX on G2	
TE0742*																															
TE0841	B64	48	HR	VC CIOA	B66	16	HP	VC CIOB	B68	18	HP	VC CIOC	B67	50	HP	VC CIOD	1x GTH	1 Lane			B65	8	HR	3.3 V	2x GTH	2 Lan es		1x GTH		4x GTH on G2	
TE0842*																															

I/O resource comparison for all 4x5 modules. There are maximum 4 user supplied I/O voltages (VCCIOA, VCCIOB, VCCIOC and VCCIOD).

*Attention: Maximum supply voltage for HP banks is 1.8V.
Module B2B FPGA-Banks and Voltages

Module Pinout Overview

Direction		Name		AM1		Name		Direction
in	in	in	in	in	in	in	in	in
in	in	in	in	3	4	GROUP1	ETH MD001	MD1 TX
in	in	in	in	5	6	GROUP1	ETH MD002	MD1 TX
in	in	in	in	7	8	GROUP1	ETH MD003	MD1 TX
in	in	in	in	9	10	GROUP1	ETH MD004	MD1 RX
in	in	in	in	11	12	GROUP1	ETH MD005	MD1 RX
in	in	in	in	13	14	GROUP1	ETH MD006	MD1 TX
in	in	in	in	15	16	GROUP1	ETH MD007	MD1 TX
in	in	in	in	17	18	GROUP1	ETH MD008	MD1 TX
in	in	in	in	19	20	GROUP1	ETH MD009	MD1 RX
in	in	in	in	21	22	GROUP1	ETH MD010	MD1 RX
in	in	in	in	23	24	GROUP1	ETH MD011	MD1 RX
in	in	in	in	25	26	GROUP1	ETH MD012	MD1 RX
in	in	in	in	27	28	GROUP1	ETH MD013	MD1 RX
in	in	in	in	29	30	GROUP1	ETH MD014	MD1 RX
in	in	in	in	31	32	GROUP1	ETH MD015	MD1 RX
in	in	in	in	33	34	GROUP1	ETH MD016	MD1 RX
in	in	in	in	35	36	GROUP1	ETH MD017	MD1 RX
in	in	in	in	37	38	GROUP1	ETH MD018	MD1 RX
in	in	in	in	39	40	GROUP1	ETH MD019	MD1 RX
in	in	in	in	41	42	GROUP1	ETH MD020	MD1 RX
in	in	in	in	43	44	GROUP1	ETH MD021	MD1 RX
in	in	in	in	45	46	GROUP1	ETH MD022	MD1 RX
in	in	in	in	47	48	GROUP1	ETH MD023	MD1 RX
in	in	in	in	49	50	GROUP1	ETH MD024	MD1 RX
in	in	in	in	51	52	GROUP1	ETH MD025	MD1 RX
in	in	in	in	53	54	GROUP1	ETH MD026	MD1 RX
in	in	in	in	55	56	GROUP1	ETH MD027	MD1 RX
in	in	in	in	57	58	GROUP1	ETH MD028	MD1 RX
in	in	in	in	59	60	GROUP1	ETH MD029	MD1 RX
in	in	in	in	61	62	GROUP1	ETH MD030	MD1 RX
in	in	in	in	63	64	GROUP1	ETH MD031	MD1 RX
in	in	in	in	65	66	GROUP1	ETH MD032	MD1 RX
in	in	in	in	67	68	GROUP1	ETH MD033	MD1 RX
in	in	in	in	69	70	GROUP1	ETH MD034	MD1 RX
in	in	in	in	71	72	GROUP1	ETH MD035	MD1 RX
in	in	in	in	73	74	GROUP1	ETH MD036	MD1 RX
in	in	in	in	75	76	GROUP1	ETH MD037	MD1 RX
in	in	in	in	77	78	GROUP1	ETH MD038	MD1 RX
in	in	in	in	79	80	GROUP1	ETH MD039	MD1 RX
in	in	in	in	81	82	GROUP1	ETH MD040	MD1 RX
in	in	in	in	83	84	GROUP1	ETH MD041	MD1 RX
in	in	in	in	85	86	GROUP1	ETH MD042	MD1 RX
in	in	in	in	87	88	GROUP1	ETH MD043	MD1 RX
in	in	in	in	89	90	GROUP1	ETH MD044	MD1 RX
in	in	in	in	91	92	GROUP1	ETH MD045	MD1 RX
in	in	in	in	93	94	GROUP1	ETH MD046	MD1 RX
in	in	in	in	95	96	GROUP1	ETH MD047	MD1 RX
in	in	in	in	97	98	GROUP1	ETH MD048	MD1 RX
in	in	in	in	99	100	GROUP1	ETH MD049	MD1 RX
in	in	in	in	101	102	GROUP1	ETH MD050	MD1 RX

Legend	
	Power-VCC
	Power-GND
	GROUP1
	GROUP2
	GROUP3
	GROUP4
	GROUP5
	GROUP6
	GROUP7
	GROUP8
	GROUP9
	Special
	VCCIOA
	VCCIOB
	VCCIOC
	VCCIOD

Direction		IM2			Direction	
Direction	Name	Pin	Pin	Name	Pin	Direction
in	VCCIO	1	1	PWR_1	in	
in	VCCIO	3	4	PWR_1	in	
in	VCCIO	5	6	PWR_1	in	
in	VCCIO	7	8	PWR_1	in	
in	VCCIO	9	10	PWR_1	in	
in	GROUP1	11	12	GROUP1	out	
in	GROUP1	13	14	GROUP1	out	
in	GROUP1	15	16	GROUP1	out	
in	GROUP1	17	18	SC-WRT	in	
in	PWR_AHRT	19	20	SRST	in	
in	GROUP1	21	22	GROUP1	in	
in	GROUP1	23	24	GROUP1	in	
in	GROUP1	25	26	GROUP1	in	
in	GROUP1	27	28	GROUP1	in	
in	SRST	29	30	SRST	in	
in	GROUP1	31	32	GROUP1	in	
in	GROUP1	33	34	GROUP1	in	
in	GROUP1	35	36	GROUP1	in	
in	GROUP1	37	38	GROUP1	in	
in	GROUP1	39	40	GROUP1	in	
in	GROUP1	41	42	GROUP1	in	
in	GROUP1	43	44	GROUP1	in	
in	GROUP1	45	46	GROUP1	in	
in	GROUP1	47	48	GROUP1	in	
in	SRST	49	50	SRST	in	
in	GROUP1	51	52	GROUP1	in	
in	GROUP1	53	54	GROUP1	in	
in	GROUP1	55	56	GROUP1	in	
in	GROUP1	57	58	GROUP1	in	
in	SRST	59	60	SRST	in	
in	GROUP1	61	62	GROUP1	in	
in	GROUP1	63	64	GROUP1	in	
in	GROUP1	65	66	GROUP1	in	
in	GROUP1	67	68	GROUP1	in	
in	SRST	69	70	SRST	in	
in	GROUP1	71	72	GROUP1	in	
in	GROUP1	73	74	GROUP1	in	
in	GROUP1	75	76	GROUP1	in	
in	GROUP1	77	78	GROUP1	in	
in	GROUP1	79	80	GROUP1	in	
in	GROUP1	81	82	GROUP1	in	
in	GROUP1	83	84	GROUP1	in	
in	GROUP1	85	86	GROUP1	in	
in	GROUP1	87	88	GROUP1	in	
in	GROUP1	89	90	SRST	in	
in	SRST	91	92	GROUP1	in	
in	TMS	93	94	GROUP1	in	
in	TDI	95	96	GROUP1	in	
in	VDD	97	98	GROUP1	in	
in	TCK	99	100	GROUP1	in	

Carrier Board Power Connection Table

IO Voltage		B2B Connector		Carrier Boards													
Name	Direction*	JB1	JB2	TE0701		TE0703 Rev01 - Rev04		TE0703 Rev 05		TE0705		TE0706		TEBA0841		TEBA0841 REV01	
		Pin	Pin	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.	Schematic Name	Value, Option, Comp.
PWR_1	out	2,4,6	1,3,5,7	5V0	5V	3.3V	3.3V	3.3V	3.3V	5V0	5V	3.3V	3.3V	3.3V	use ext. 3.3V power supply	3.3V	use ext. 3.3V power supply
VCCI OA	out	10,12		VIOTB	FMC_VA DJ 2V5 3.3VOUT	VCCIO35	R23M3. 3VOUT J1B-B1	VCCIOA	J5M3. 3VOUT, M1. 8VOUT R23M3. 3VOUT J1-B1	VIOTB	FMC_VA DJ 2V5 3.3VOUT	VCCIO35	R20->M3. 3VOUT/J6B-B32	VCCIOA	J26 M1.8VOUT, 2.5V, 3.3V_OUT J20-6,J20-45	VCCIOA	J26 M1.8VOUT, 2.5V, 3.3V_OUT J20-6,J20-45

VCCIOD	out		8,10	VIOTB	FMC_VA DJ 2V5 3.3VOUT	VCCIO13	R26M3. 3VOUT J2B-B1	VCCIOD	J10M3. 3VOUT, M1. 8VOUT R26M3. 3VOUT J2B-B1	VIOTB	FMC_VA DJ 2V5 3.3VOUT	VCCIO13	R22->M3. 3VOUT/J6B- B1	VCCIOD	J27 M1.8VOUT, 2.5V, 3.3V_OUT J17-6,J17-45	VCCIOD	J27 M1.8VOUT, 2.5V, 3.3V_OUT J17-6,J17-45
PWR_2	out	14,16		3V3IN	3.3V	3.3V	3.3V	3.3V	3.3V	3V3IN	3.3V	3.3V	3.3V	3.3V	use ext. 3.3V power supply	3.3V	use ext. 3.3V power supply
VCCIOB	out		2,4	no name / VIOTA	FMC_VA DJ 2V5 3.3VOUT	VCCIO34	J5M3. 3VOUT J1B-B32	VCCIOB	J8M3.3VOUT, M1.8VOUT J2B-B32	VIOTB	FMC_VA DJ 2V5 3.3VOUT	1.8V	1.8V	VCCIOB	J5 M1.8VOUT, 2.5V, 3.3V_OUT	VCCIOB	NC
VCCIOC	out		6	no name / VIOTA	FMC_VA DJ 2V5 3.3VOUT	VCCIO33	R25M3. 3VOUT J2B-B32	VCCIOC	J9M3. 3VOUT, M1. 8VOUT R25M3. 3VOUT J2B-B32	VIOTB	FMC_VA DJ 2V5 3.3VOUT	VCCIO33	R21->M3. 3VOUT	VCCIOC	J6 M1.8VOUT, 2.5V, 3.3V_OUT	VCCIOC	NC
PWR_M1	in		9,11	3.3 VOUT	3.3V	3.3 VOUT	3.3V	M3. 3VOUT	3.3V	3.3 VOUT	3.3V	M3. 3VOUT	3.3V	3.3 V_OUT	3.3V	3.3 V_OUT	3.3V
PWR_M2	in	40		VIOB	1.8V	M1. 8VOUT	1.8V	M1. 8VOUT	1.8V	VIOB	1.8V	M1. 8VOUT	1.8V	M1. 8VOUT	1.8V	M1. 8VOUT	1.8V
PWR_M3	in		20	NC		NC		NC		NC		NC			NC		NC
PWR_VBAT	out	80		VBAT	B1	VBAT	J7	VBAT	J7	NC		VBAT	J9	VBAT	NC	VBAT	NC
PWR_JTAG	in		92	VCCJTAG		VCCJTAG		VCCJTAG		VCCJTAG		VCCJTAG		VCCJTAG		VCCJTAG	NC

Power comparison of all 4x5 carrier boards. ***Power direction based on carrier boards view.** There are 4 variable user supplied I/O voltages (VCCIOA, VCCIOB, VCCIOC and VCCIOD). PWR_1 and PWR_2 are fixed from carrier boards. PWR_M1 and PWR_M2 normally use default value from module. NC=Not Connected

Attention: On some carrier boards the user supplied I/O voltages are connected together (red colored schematic names).

Power Pin Connection on different Carrierboards

Carrier Pinout Overview

Positions are displayed
as
Top View

JB1					
Direction	Name	Pin	Pin	Name	Direction
out	PWR_1	2	1	GND	
out	PWR_1	4	3	ID	
out	PWR_1	6	5	ID	
in	NOSQL	8	7	GND	
out	VCCIOA	10	9	ID	
out	VCCIOA	12	11	ID	
out	PWR_2	14	13	ETH_VCC	
out	PWR_2	16	15	ID	
	ID	18	17	ID	
	ID	20	19	GND	
	ID	22	21	ID	
	ID	24	23	ID	
	ID	26	25	GND	
	ID	28	27	SC_EN1	out
	GND	30	29	SC_PGOOD	in
	ID	32	31	SC_BOOTMODE	out
	ID	34	33	GND	
	ID	36	35	ID	
	ID	38	37	ID	
in	PWR_M1	40	39	ID	
	ID	42	41	ID	
	ID	44	43	GND	
	ID	46	45	ID	
	ID	48	47	ID	
	ID	50	49	ID	
	ID	52	51	ID	
	GND	54	53	GND	
	ID	56	55	ID	
	ID	58	57	ID	
	ID	60	59	ID	
	ID	62	61	ID	
	GND	64	63	GND	
	ID	66	65	ID	
	ID	68	67	ID	
	ID	70	69	ID	
	ID	72	71	ID	
	GND	74	73	GND	
	ID	76	75	ID	
	ID	78	77	ID	
out	PWR_VCC1	80	79	ID	
	ID	82	81	ID	
in	IO/UART TX	86	85	ID	
	ID	88	87	ID	
out	JTAGSEL	90	89	GND	
	ID	92	91	IO/UART RX	out
	ID	94	93	ID	
	ID	96	95	ID	
	ID	98	97	ID	
	ID	100	99	ID	

JB2					
Direction	Name	Pin	Pin	Name	Direction
	ID	2	1	ID	
	ID	4	3	ID	
	GND	6	5	GND	
	ID	8	7	ID	
	ID	10	9	ID	
	GND	12	11	GND	
	ID	14	13	ID	
	ID	16	15	ID	
	GND	18	17	GND	
	ID	20	19	ID	
	ID	22	21	ID	
	GND	24	23	GND	
	ID	26	25	ID	
	ID	28	27	ID	
	GND	30	29	GND	
	ID	32	31	ID	
	ID	34	33	ID	
	GND	36	35	GND	
	ID	38	37	ID	
	ID	40	39	ID	
	ID	42	41	ID	
	ID	44	43	ID	
	GND	46	45	GND	
	ID	48	47	ID	
	ID	50	49	ID	
	ID	52	51	ID	
	ID	54	53	ID	
	ID	56	55	ID	
	ID	58	57	ID	
	ID	60	59	ID	

Direction	Name	Pin	Pin	Name	Direction
out	VCCIOB	2	1	PWR_1	out
out	VCCIOB	4	3	PWR_1	out
out	VCCIOB	6	5	PWR_1	out
out	VCCIOB	8	7	PWR_1	out
out	VCCIOB	10	9	PWR_M1	in
	ID	12	11	PWR_M1	in
	ID	14	13	ID	
	ID	16	15	ID	
	ID	18	17	SC_nRST	out
	NC/GND	20	19	GND	
	ID	22	21	ID	
	ID	24	23	ID	
	ID	26	25	ID	
	ID	28	27	ID	
	NC/GND	30	29	GND	
	ID	32	31	ID	
	ID	34	33	ID	
	ID	36	35	ID	
	ID	38	37	ID	
	GND	40	39	GND	
	ID	42	41	ID	
	ID	44	43	ID	
	ID	46	45	ID	
	ID	48	47	ID	
	GND	50	49	GND	
	ID	52	51	ID	
	ID	54	53	ID	
	ID	56	55	ID	
	ID	58	57	ID	
	GND	60	59	GND	
	ID	62	61	ID	
	ID	64	63	ID	
	ID	66	65	ID	
	ID	68	67	ID	
	GND	70	69	GND	
	ID	72	71	ID	
	ID	74	73	ID	
	ID	76	75	ID	
	ID	78	77	ID	
	GND	80	79	GND	
	ID	82	81	ID	
	ID	84	83	ID	
	ID	86	85	ID	
	ID	88	87	ID	
	ID	90	89	GND	
in	PWR_ITAG	92	91	ID	
out	TMS	94	93	ID	
out	TDI	96	95	ID	
out	TDO	98	97	ID	
out	TCK	100	99	ID	

Positions are displayed
as
Top View

Legend	
	Power-VCC
	Power-GND
	Special
	IO / Special
	VCCIOA
	VCCIOB
	VCCIOB

Carrierboard basic power and group pin assignment (Top View), recommended to verify with Schematics

4x5 Module Controller IOs

Name	Module B2B Pin	Carrier B2B Pin	Direction (Module view)	Description	Recommendation
JTAGSEL	JM1-89	JB1-90	in	JTAG Chain multiplexer. Low FPGA, High CPLD. For module with CPLD only.	Connect Pulldown on carrier. DIP switch possible.
SC_EN1	JM1-28	JB1-27	in	Module power. Set high to enable module power. Note: Power management depends on module. Sometimes this is a only used as Power ON Reset like SC_nRST	Connect Pullup on carrier. DIP switch possible
SC_NO SEQ	JM1-7	JB1-8	in / inout	Module Power management. Set high to disable CPLD power management. Note: Power management depends on module and not all modules support extended power management with CPLD.	Connect Pullup or force to GND over zero ohm resistor on carrier. DIP switch possible.
SC_PG OOD	JM1-30	JB1-29	out / inout	Power Good signal. Is Low, if SC_EN1 is set to zero or if power is not ready, otherwise high impedance output. Note: Power management depends on module. On newer Firmware SC_PGOOD will be used as Additionally Boot Mode Pin.	Connect Pullup on carrier. Do not use this signal to enable FPGA Bank voltages. It's only for monitoring. To Enable FPGA Banks, use 3.3V(PWR_M1) or 1.8V(PWR_M2) module output.

SC_BO OTMODE	JM1-32	JB1-31	in	Boot Mode selection Pin for Zynq module only. Default low for primary SD boot and high for primary QSPI boot. Note: Depends also on module CPLD firmware	Connect Pullup on carrier. DIP switch possible.
SC_nRST	JM2-18	JB2-17	in	Low active module reset. Pin force Power one reset on FPGA /SoC. Note: Depending from module CPLD or voltage supervisor is used.	Connect Pullup on carrier. DIP switch possible.

- Controller IOs are 3.3V IOs

 It's planned to use SC_PGOOD also as additional Boot Mode Pin (Pin is bidirectional, pull up or force to zero), to additionally set JTAG only boot mode (to avoid programming problems with some vivado versions, see: [AR#00002 - QSPI Programming issues](#)). Current state of CPLD Redesigns: [AVN-20220506 4 x 5 modules controller IOs redefinition and CPLD updates](#)

4x5 Module Controller IOs

Remove 4x5 module

[4 x 5 SoMs Handling and Usage Precautions](#)

Compatibility Guide

Ethernet LED'S

TE07xx 4x5 modules do not have dedicated pins for the Ethernet PHY LED's, also there are no fix pins on the baseboards for the PHY LED's or any other LED's.

If Ethernet JACKs on Baseboard have LED's then those should be connected to some free PL I/O pins, and then routed in the FPGA logic from the PHY to the I/O Pin in the B2B Connector.

Recommended connections would be to use JM2.89 and JM2.100 for the PHY LED's, those positions support baseboard ETH LED's for TE0701 and TE0703 and TE0706.

JM2 pins 1, 3 (TE0720 Bank 34 Voltage)

- To be compatible with TE0720 JM2 pins 1,3 must be connected to some valid VCCIO voltage.
- When JM2 pins 1, 3 are not powered TE0720 would not boot, and may not be recognized in JTAG chain as well.
- When those pins are not used on the module (TE0710) then to be compatible with TE0720:
- Solution A: connect to 3.3V out from the module, option compatible to all modules except those with HP banks
- Solution B: connect to 1.8V out from the module, option compatible with all modules.

Carrier Board Checklist

Schematic Checklist

--	--	--

1	Are B2B pin numbers on the connectors mirrored compared to the module pin numbers?	As B2B connectors are "unisex" type they do mirror pin numbers when connecting. That is pin1 connects to pin2, and pin2 to pin1, etc.
2	Are B2B connectors named JB1, JB2, JB3?	This is not a hard requirement, but it helps to use the same identifiers.
3	Are all GND pins connected to a common ground net?	
4	Are all VIN pins connected together?	
5	Is JB2 pin 92 pin used as VREF for the JTAG interface?	for future compatibility only, currently all modules have 3.3V JTAG
6	For 7 Series Zynq module only: Are external circuits/buffers connecting to MIO bank 1 pins powered from JB1 pin 40?	JB1 pins 18, 20, 22, 24, 26, 28 use voltage at pin 40 as VCCIO. Currently it is 1.8V for 4x5 Zynq Modules. Note: Different Power supply on TE0820(3.3V MIO Bank) and normal FPGA modules(check schematics)

PCB Checklist


1	Are mounting holes placed properly?	Four Mounting holes should always be used. They are required for mounting screws and for module extraction. The mounting holes will also help in dissipating some heat from the module to the carrier board PCB. Four holes with a 3.2mm diameter should be placed exactly at the corners of a 34mm by 44mm rectangle.
2	Are B2B headers properly placed?	B2B headers must be placed and aligned very precisely or the module will not align correctly (in the worst case module insertion could destroy the connectors or the PCB). The B2B headers should be locked on the PCB, and it is recommended that the position and placement be checked against placement dimensions before submitting the PCB files.
3	Are B2B headers rotated properly?	As B2B header pin numbers differ from module to the carrier (swap of odd and even numbers), it is recommended that the rotation is checked in the PCB design.
4	Height clearance below module	Components can be placed below the module but height clearance rules must be obeyed.
5	Power dissipation of components below module	It is not recommended to place any components with high power dissipation below the module, as there will be almost no airflow below the module.

Visual Check of Module placement

It is highly recommended to use the Base board Template designs as a starting point for new PCB designs. If that is not possible, then adding linear dimensions in the design helps to check that all connectors and mounting holes are properly placed.



This placement is same for all 4x5 Modules!

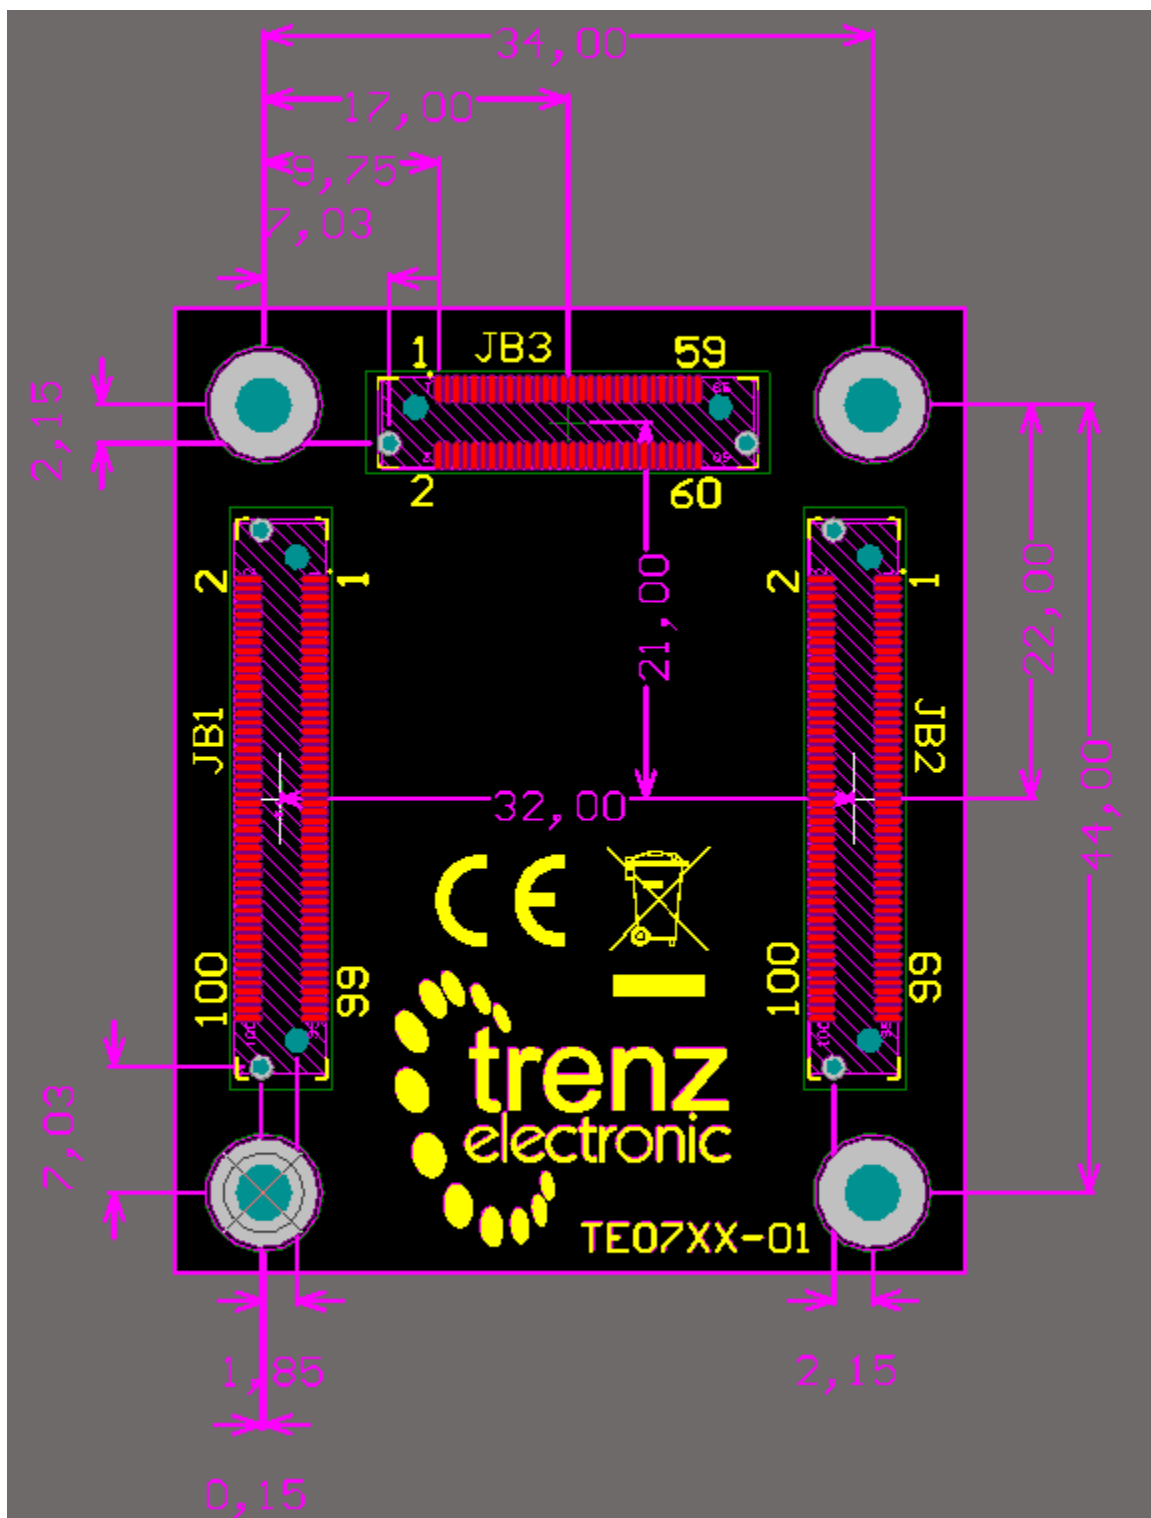

Top view of the Carrier Board.

Connector numbers as on base! (pin JB1.1 on base would mate to pin JM1.2 on module).