


TEI0003 Getting Started

Table of Contents

- [Overview](#)
- [Power supply](#)
- [Buttons](#)
- [LEDs](#)
- [JTAG/UART](#)
- [Reference Designs](#)
- [Notes](#)

Overview

TEI0003-02 CYC1000

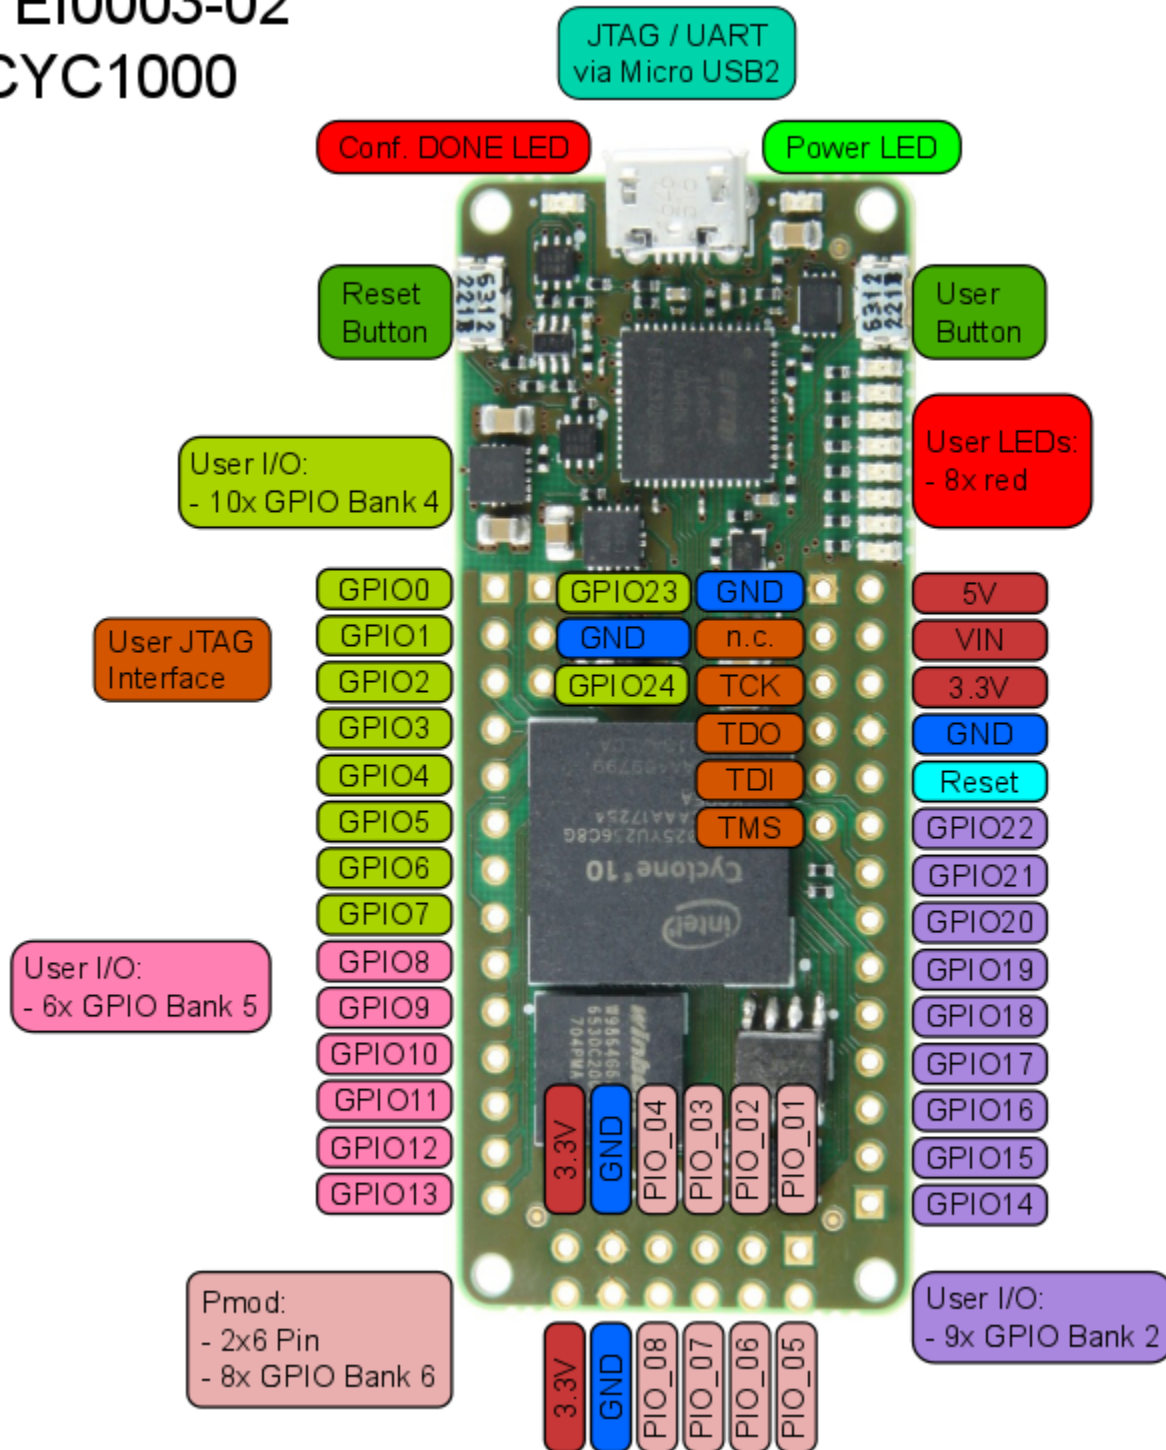

Power supply

Over Micro USB or VIN Pin (5V) possible.

Buttons

Reset Button: reset Cyclone 10 (nConfig Pin).

User Button: FPGA Pin N6

LEDs

See overview picture.

JTAG/UART

JTAG(first FTDI port) and UART(second FTDI port) is over MicroUSB connector possible. External JTAG Programmer is not needed.

Reference Designs

- [TEI0003 Reference Designs](#)

Notes

- [TEI0003 Resources](#)