

TE0725LP Test Board

Table of contents

Overview


- 1 [Overview](#)

- 1.1 [Key Features](#)
- 1.2 [Revision History](#)
- 1.3 [Release Notes and Know Issues](#)

MicroBlaze Design with Hello-TE0725 example in endless loop.

Refer to <http://trenz.org/te0725LP-info> for the current online version of this manual and other available documentation.

- 1.4 [Hardware](#)
- 1.5 [Content](#)
 - 1.5.1 [Design Sources](#)
 - 1.5.2 [Additional Sources](#)
 - 1.5.3 [Prebuilt](#)
 - 1.5.4 [Download](#)
- 2 [Design Flow](#)
- 3 [Launch](#)
 - 3.1 [Programming](#)
 - 3.1.1 [Get prebuilt boot binaries](#)
 - 3.1.2 [QSPI](#)
 - 3.1.3 [SD](#)
 - 3.1.4 [JTAG](#)
 - 3.2 [Usage](#)
 - 3.2.1 [UART](#)
- 4 [System Design - Vivado](#)
 - 4.1 [Block Design](#)
 - 4.1.1
 - 4.2 [Constraints](#)
 - 4.2.1 [Basic module constraints](#)
 - 4.2.2 [Design specific constraints](#)
- 5 [Software Design - Vitis](#)
 - 5.1 [Application](#)
 - 5.1.1 [hello-led725](#)
- 6 [Additional Software](#)
- 7 [Appx. A: Change History and Legal Notices](#)
 - 7.1 [Document Change History](#)
 - 7.2 [Legal Notices](#)
 - 7.3 [Data Privacy](#)
 - 7.4 [Document Warranty](#)
 - 7.5 [Limitation of Liability](#)
 - 7.6 [Copyright Notice](#)
 - 7.7 [Technology Licenses](#)
 - 7.8 [Environmental Protection](#)
 - 7.9 [REACH, RoHS and WEEE](#)
- 8 [Table of contents](#)

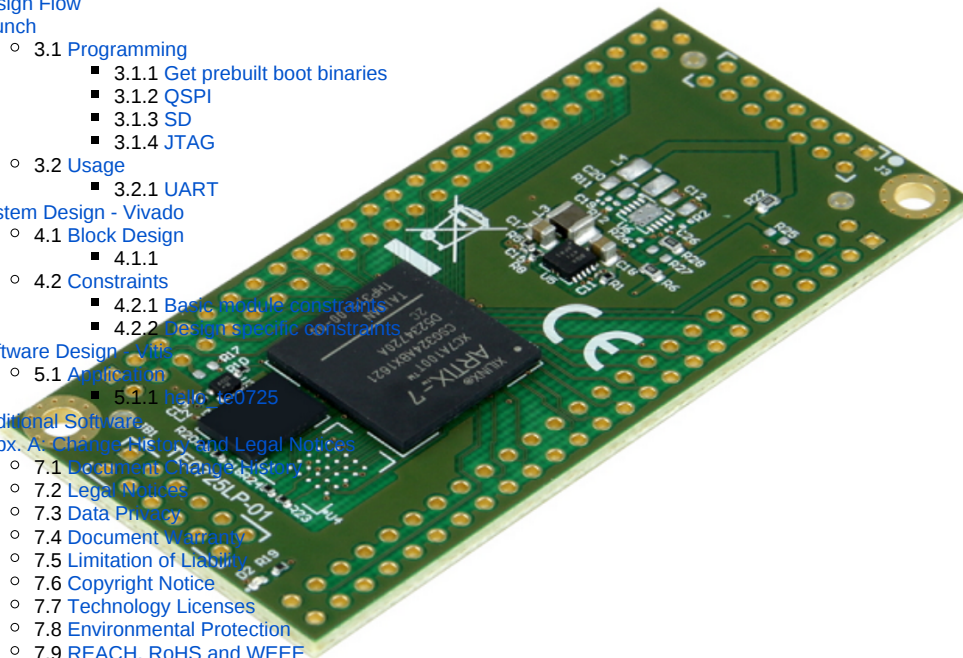

Key Features

- Vitis/Vivado 2021.2
- MicroBlaze
- QSPI
- I2C
- UART

Revision History

Date	Vivado	Project Built	Authors	Description
2022-08-31	2021.2	TE0725LP-test_board_noprebui lt-vivado_2021.2- build_15_20220831 152107.zip TE0725LP-test_board- vivado_2021.2- build_15_20220831 152107.zip	Waldemar Hanemann	• 2021.2 update • Documentation style update
2020-04-20	2019.2	TE0725LP-test_board_noprebui lt-vivado_2019.2- build_10_20200420 093012.zip TE0725LP-test_board- vivado_2019.2- build_10_20200420 092959.zip	John Hartfiel	• 2019.2 update
2019-11-19	2018.2	TE0725LP-test_board_noprebui lt-vivado_2018.2- build_04_20191119 080754.zip TE0725LP-test_board- vivado_2018.2- build_04_20191119 080742.zip	John Hartfiel	• bugfix board part files clk settings
2018-08-16	2018.2	TE0725LP-test_board- vivado_2018.2- build_02_20180816 093341.zip TE0725LP-test_board_noprebui lt-vivado_2018.2- build_02_20180816 093354.zip	John Hartfiel	• 2018.2 update
2018-03-19	2017.4	TE0725LP-test_board- vivado_2017.4- build_07_20180319 162005.zip TE0725LP-test_board_noprebui lt-vivado_2017.4- build_07_20180319 162259.zip	John Hartfiel	• initial release

Design Revision History

Release Notes and Know Issues

Issues	Description	Workaround	To be fixed version
No known issues	---	---	---

Known Issues

Requirements

Software

Software	Version	Note
Vitis	2021.2	needed, Vivado is included into Vitis installation

Software

Hardware

Basic description of TE Board Part Files is available on [TE Board Part Files](#).

Complete List is available on <design name>/board_files/*_board_files.csv

Design supports following modules:

Module Model	Board Part Short Name	PCB Revision Support	DDR	QSPI Flash	EMMC	Others	Notes
TE0725LP-01-100-2C	100	REV01	NA	32MB	NA	NA	3.3V Input Voltage
TE0725LP-01-100-2D	100	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-100-2L	100	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-100-2I	100_2i	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-72C-1	100	REV01	NA	32MB	NA	NA	3.3V Input Voltage
TE0725LP-01-72C-1T	100	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-72I-1T	100_2i	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-72C-1U	100	REV01	NA	32MB	NA	NA	1.8V Input Voltage
TE0725LP-01-72C-1H	100	REV01	NA	32MB	NA	with hyperflash	3.3V Input Voltage

Hardware Modules

Design supports following carriers:

Carrier Model	Notes

Hardware Carrier

Additional HW Requirements:

Additional Hardware	Notes
TE0790 JTAG Programmer	Important: Depending on assembly version, it's not possible to supply module via TE0790. If it's possible, it's not recommended to use TE0790 for power supply(TE0790 TRM#PowerandPower-OnSequence)
External power supply	3.3V or 1.8V depending on assembly variant

Additional Hardware

Content

For general structure and of the reference design, see [Project Delivery - AMD devices](#)

Design Sources

Type	Location	Notes
Vivado	<design name>/block_design <design name>/constraints <design name>/ip_lib	Vivado Project will be generated by TE Scripts
Vitis	<design name>/sw_lib	Additional Software Template for Vitis and apps_list.csv with settings automatically for Vitis app generation

Design sources

Additional Sources

Type	Location	Notes
--	--	--

Additional design sources

Prebuilt

File	File-Extension	Description
BIT-File	*.bit	FPGA (PL Part) Configuration File
DebugProbes-File	*.ltx	Definition File for Vivado/Vivado Labtools Debugging Interface
Diverse Reports	---	Report files in different formats
Hardware-Platform-Specification-Files	*.xsa	Exported Vivado Hardware Specification for Vitis and PetaLinux
LabTools Project-File	*.lpr	Vivado Labtools Project File
MCS-File	*.mcs	Flash Configuration File with Boot-Image (MicroBlaze or FPGA part only)
MMI-File	*.mmi	File with BRAM-Location to generate MCS or BIT-File with *.elf content (MicroBlaze only)
Software-Application-File	*.elf	Software Application for Zynq or MicroBlaze Processor Systems

Prebuilt files (only on ZIP with prebuilt content)

Download

Reference Design is only usable with the specified Vivado/Vitis/PetaLinux version. Do never use different Versions of Xilinx Software for the same Project.

Reference Design is available on:

- [TE0725LP "Test Board" Reference Design](#)

Design Flow



Reference Design is available with and without prebuilt files. It's recommended to use TE prebuilt files for first lunch.

Trenz Electronic provides a tcl based built environment based on Xilinx Design Flow.

See also:

- [AMD Development Tools#XilinxSoftware-BasicUserGuides](#)
- [Vivado Projects - TE Reference Design](#)
- [Project Delivery](#).

The Trenz Electronic FPGA Reference Designs are TCL-script based project. Command files for execution will be generated with "_create_win_setup.cmd" on Windows OS and "_create_linux_setup.sh" on Linux OS.

TE Scripts are only needed to generate the vivado project, all other additional steps are optional and can also executed by Xilinx Vivado/Vitis GUI. For currently Scripts limitations on Win and Linux OS see: [Project Delivery Currently limitations of functionality](#)



Caution! Win OS has a 260 character limit for path lengths which can affect the Vivado tools. To avoid this issue, use Virtual Drive or the shortest possible names and directory locations for the reference design (for example "x:\<project folder>")

1. Run _create_win_setup.cmd/_create_linux_setup.sh and follow instructions on shell:

`_create_win_setup.cmd/_create_linux_setup.sh`

```
-----Set design paths-----
-- Run Design with: _create_win_setup
-- Use Design Path: <absolute project path>
-----
-----TE Reference
Design-----
-----
-- (0) Module selection guide, project creation...prebuilt export...
-- (1) Create minimum setup of CMD-Files and exit Batch
-- (2) Create maximum setup of CMD-Files and exit Batch
-- (3) (internal only) Dev
-- (4) (internal only) Prod
-- (c) Go to CMD-File Generation (Manual setup)
-- (d) Go to Documentation (Web Documentation)
-- (g) Install Board Files from Xilinx Board Store (beta)
-- (a) Start design with unsupported Vivado Version (beta)
-- (x) Exit Batch (nothing is done!)
-----
Select (ex.: '0' for module selection guide):
```

2. Press 0 and enter to start "Module Selection Guide"
3. Create project and follow instructions of the product selection guide, settings file will be configured automatically during this process.
 - optional for manual changes: Select correct device and Xilinx install path on "design_basic_settings.cmd" and create Vivado project with "vivado_create_project_gui mode.cmd"



Note: Select correct one, see also [Vivado Board Part Flow](#)

- a. Create hardware description file (.xsa file) for PetaLinux project and export to prebuilt folder

**run on Vivado TCL (Script generates design and export files into
"<project folder>\prebuilt\hardware\<short name>")**

```
TE::hw_build_design -export_prebuilt
```



Using Vivado GUI is the same, except file export to prebuilt folder.

4. Generate Programming Files with Vitis

**run on Vivado TCL (Script generates applications and bootable files, which are
defined in "test_board\sw_lib\apps_list.csv")**

```
TE::sw_run_vitis -all
TE::sw_run_vitis (optional; Start Vitis from Vivado GUI or start  
with TE Scripts on Vivado TCL)
```



Note: Scripts generate applications and bootable files, which are defined in "sw_lib\apps_list.csv"

App from Firmware folder will be add into BlockRAM. If you add other app, you must select *.elf

manually on Vivado



TCL scripts generate also platform project, this must be done manually in case GUI is used. See [Vitis](#)

5. (optional) Copy Application (hello_te0725.elf) from prebuilt-folder into \firmware\microblaze_0\ and regenerate design with

run on Vivado TCL (Script generates design and export files into "<project folder>\prebuilt\hardware\<short name>")

```
TE::hw_build_design -export_prebuilt
```

Launch

Programming



Check Module and Carrier TRMs for proper HW configuration before you try any design.

Xilinx documentation for programming and debugging: [Vivado/SDK/SDSoC-Xilinx Software Programming and Debugging](#)

Get prebuilt boot binaries

1. Run _create_win_setup.cmd/_create_linux_setup.sh and follow instructions on shell
2. Press 0 and enter to start "Module Selection Guide"
 - a. Select assembly version
 - b. Validate selection
 - c. Select create and open delivery binary folder



Note: Folder "<project folder>_binaries_<Article Name>" with subfolder "boot_<app name>" for different applications will be generated

QSPI

1. Connect JTAG and power on carrier with module
2. Open Vivado Project with "vivado_open_existing_project_gui mode.cmd" or if not created, create with "vivado_create_project_gui mode.cmd"

run on Vivado TCL (Script programs .mcs-File on QSPI flash)

```
TE::pr_program_flash -swapp hello_te0725
```

3. Press the reset button to start the application and see the output in the console

SD

Not used on this Example.

JTAG

1. Connect JTAG and power on PCB
2. Open Vivado HW Manager
3. Program FPGA with Bitfile from "prebuilt\hardware\<short dir>"

Usage

1. Prepare HW like described on section [Programming](#)
2. Connect UART USB (most cases same as JTAG)
3. 1. FPGA Loads Bitfile from Flash


3. Hello Trenz will be run on UART console.

info: Do not reboot, if Bitfile programming over JTAG is used as programming method.

a. UART

Open Serial Console (e.g. putty) Hello TE0725 will run on endless loop.

- i. Speed: 9600
- ii. COM Port: Win OS, see device manager, Linux OS see `dmesg |grep tty` (UART is *USB1)

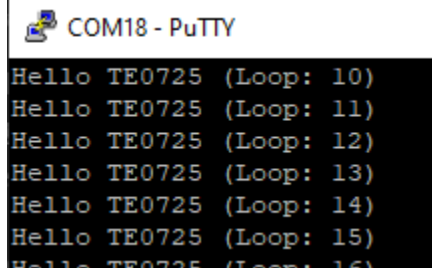


```
COM18 - PuTTY
Hello TE0725 (Loop: 10)
Hello TE0725 (Loop: 11)
Hello TE0725 (Loop: 12)
Hello TE0725 (Loop: 13)
Hello TE0725 (Loop: 14)
Hello TE0725 (Loop: 15)
Hello TE0725 (Loop: 16)
```

Power On PCB (Do not restart, if you use Bitfile programming)

System Design - Vivado

Block Design

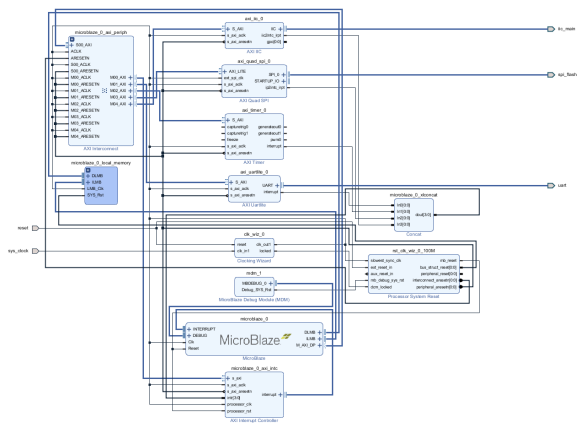

Constraints

Basic module constraints

```
_i_bitgen_common.xdc

set_property BITSTREAM.GENERAL.COMPRESS TRUE [current_design]
set_property BITSTREAM.CONFIG.CONFIGRATE 66 [current_design]
set_property CONFIG_VOLTAGE 1.8 [current_design]
set_property CFGBVS GND [current_design]
set_property BITSTREAM.CONFIG.SPI_32BIT_ADDR YES [current_design]
set_property BITSTREAM.CONFIG.SPI_BUSWIDTH 4 [current_design]
set_property BITSTREAM.CONFIG.M1PIN PULLNONE [current_design]
set_property BITSTREAM.CONFIG.M2PIN PULLNONE [current_design]
set_property BITSTREAM.CONFIG.M0PIN PULLNONE [current_design]

set_property BITSTREAM.CONFIG.USR_ACCESS TIMESTAMP [current_design]
```

Design specific constraints

Software Design - Vitis

For SDK project creation, follow instructions from:

[Vitis](#)

Application

Template location: "<project folder>\sw_lib\sw_apps\"

hello_te0725

Trenz Hello TE0725 example as endless loop. Output on console.

Template location: \sw_lib\sw_apps\hello_te0725

The printed Text can be modified.

Additional Software

No additional software is needed.

Appx. A: Change History and Legal Notices

Document Change History

To get content of older revision got to "Change History" of this page and select older document revision number.

Date	Document Revision	Authors	Description
Error rendering macro 'page-info' Ambiguous method overload ing for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPe	Error rendering macro 'page-info' Ambiguous method overload ing for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPe	Error rendering macro 'page-info' Ambiguous method overload ing for method jdk. proxy24 1.\$Proxy 3496#hasContentLevelPe	• 2021.2 update • Documentation style update

rmission

.

Cannot

resolve

which

method

to

invoke

for [null,

class

java.

lang.

String,

class

com.

atlassian

.

confluen

ce.

pages.

Page]

due to

overlapp

ing

prototyp

es

between

:

[interfac

e com.

atlassian

.

confluen

ce.user.

Conflue

nceUser

, class

java.

lang.

rmission

.

Cannot

resolve

which

method

to

invoke

for [null,

class

java.

lang.

String,

class

com.

atlassian

.

confluen

ce.

pages.

Page]

due to

overlapp

ing

prototyp

es

between

:

[interfac

e com.

atlassian

.

confluen

ce.user.

Conflue

nceUser

, class

java.

lang.

rmission

.

Cannot

resolve

which

method

to

invoke

for [null,

class

java.

lang.

String,

class

com.

atlassian

.

confluen

ce.

pages.

Page]

due to

overlapp

ing

prototyp

es

between

:

[interfac

e com.

atlassian

.

confluen

ce.user.

Conflue

nceUser

, class

java.

lang.

String, class com. atlassian . confluen ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	String, class com. atlassian . confluen ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	String, class com. atlassian . confluen ce.core. Content EntityOb ject] [interfac e com. atlassian .user. User, class java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	
2020-04-20	v.9	John Hartfiel	2019.2 release - docu update
2019-11-19	v.8	John Hartfiel	bugfix board part files
2018-08-16	v.6	John Hartfiel	2018.2 release
2018-06-05	v.5	John Hartfiel	Typo correction UART Speed

2018-03-19	v.3	John Hartfiel	2017.4 release
	All	Error renderi ng macro 'page- info' Ambiguo us method overload ing for method jdk. proxy24 1.\$Proxy 3496#ha sConten tLevelPe rmission . Cannot resolve which method to invoke for [null, class java. lang. String, class com. atlassian	

.
confluen
ce.
pages.
Page]
due to
overlapp
ing
prototyp
es
between
:
[interfac
e com.
atlassian
.
confluen
ce.user.
Conflue
nceUser
, class
java.
lang.
String,
class
com.
atlassian
.
confluen
ce.core.
Content
EntityOb
ject]
[interfac
e com.
atlassian
.user.
User,
class

		java. lang. String, class com. atlassian . confluen ce.core. Content EntityOb ject]	
--	--	--	--

Document change history.

Legal Notices

Data Privacy

Please also note our data protection declaration at <https://www.trenz-electronic.de/en/Data-protection-Privacy>

Document Warranty

The material contained in this document is provided “as is” and is subject to being changed at any time without notice. Trenz Electronic does not warrant the accuracy and completeness of the materials in this document. Further, to the maximum extent permitted by applicable law, Trenz Electronic disclaims all warranties, either express or implied, with regard to this document and any information contained herein, including but not limited to the implied warranties of merchantability, fitness for a particular purpose or non infringement of intellectual property. Trenz Electronic shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein.

Limitation of Liability

In no event will Trenz Electronic, its suppliers, or other third parties mentioned in this document be liable for any damages whatsoever (including, without limitation, those resulting from lost profits, lost data or business interruption) arising out of the use, inability to use, or the results of use of this document, any documents linked to this document, or the materials or information contained at any or all such documents. If your use of the materials or information from this document results in the need for servicing, repair or correction of equipment or data, you assume all costs thereof.

Copyright Notice

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Trenz Electronic.

Technology Licenses

The hardware / firmware / software described in this document are furnished under a license and may be used /modified / copied only in accordance with the terms of such license.

Environmental Protection

To confront directly with the responsibility toward the environment, the global community and eventually also oneself. Such a resolution should be integral part not only of everybody's life. Also enterprises shall be conscious of their social responsibility and contribute to the preservation of our common living space. That is why Trenz Electronic invests in the protection of our Environment.

REACH, RoHS and WEEE

REACH

Trenz Electronic is a manufacturer and a distributor of electronic products. It is therefore a so called downstream user in the sense of [REACH](#). The products we supply to you are solely non-chemical products (goods). Moreover and under normal and reasonably foreseeable circumstances of application, the goods supplied to you shall not release any substance. For that, Trenz Electronic is obliged to neither register nor to provide safety data sheet. According to present knowledge and to best of our knowledge, no [SVHC \(Substances of Very High Concern\) on the Candidate List](#) are contained in our products. Furthermore, we will immediately and unsolicited inform our customers in compliance with REACH - Article 33 if any substance present in our goods (above a concentration of 0,1 % weight by weight) will be classified as SVHC by the [European Chemicals Agency \(ECHA\)](#).

RoHS

Trenz Electronic GmbH herewith declares that all its products are developed, manufactured and distributed RoHS compliant.

WEEE

Information for users within the European Union in accordance with Directive 2002/96/EC of the European Parliament and of the Council of 27 January 2003 on waste electrical and electronic equipment (WEEE).

Users of electrical and electronic equipment in private households are required not to dispose of waste electrical and electronic equipment as unsorted municipal waste and to collect such waste electrical and electronic equipment separately. By the 13 August 2005, Member States shall have ensured that systems are set up allowing final holders and distributors to return waste electrical and electronic equipment at least free of charge. Member States shall ensure the availability and accessibility of the necessary collection facilities. Separate collection is the precondition to ensure specific treatment and recycling of waste electrical and electronic equipment and is necessary to achieve the chosen level of protection of human health and the environment in the European Union. Consumers have to actively contribute to the success of such collection and the return of waste electrical and electronic equipment. Presence of hazardous substances in electrical and electronic equipment results in potential effects on the environment and human health. The symbol consisting of the crossed-out wheeled bin indicates separate collection for waste electrical and electronic equipment.

Trenz Electronic is registered under WEEE-Reg.-Nr. DE97922676.

Error rendering macro 'page-info'

Ambiguous method overloading for method jdk.
proxy241.\$Proxy3496#hasContentLevelPermission. Cannot resolve which method to
invoke for [null, class java.lang.String, class com.atlassian.confluence.pages.Page] due
to overlapping prototypes between: [interface com.atlassian.confluence.user.
ConfluenceUser, class java.lang.String, class com.atlassian.confluence.core.
ContentEntityObject] [interface com.atlassian.user.User, class java.lang.String, class
com.atlassian.confluence.core.ContentEntityObject]