

TEI0015 Getting Started

Overview

TEI0015

red
Status
LED

JTAG / 245 FIFO
via micro USB2

green
Power
LED

Reset
Button

User
Button

8 x red
User
LED

AREF	A7
A0	GND
A1	AIN
A2	
A3	
A4	
A5	
A6	
D0	
D1	
D2	
D3	
D4	
D5	


GND	OUT 5V
JTAGEN	VIN 5V
TCK	OUT 3.3V
TDO	GND
TDO	Reset
TMS	D14
	D13
	D12
	D11
	D10
	D9
	D8
	D7
	D6

User I/O:
- 8 x analog
- 14 x digital

JTAG



A D C
G N D
A D C

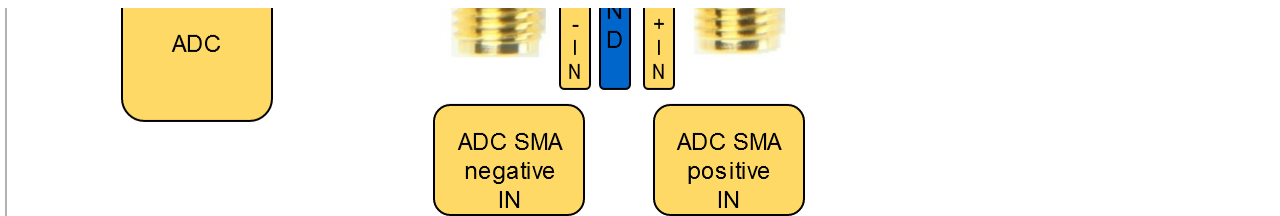

Power Supply

- Over Micro USB or VIN Pin (5V) possible.

Buttons

- Reset Button: reset MAX10.
- User Button: FPGA Bank 8 (E6)

LED

- See overview picture.

JTAG/245 FIFO

- JTAG (first FTDI port) and 245 FIFO (second FTDI port) is over MicroUSB connector possible. External JTAG Programmer is not needed.

Reference Designs

- [TEI0015 Reference Designs](#)

Notes

- [TEI0015 Resources](#)